

UPC++ v1.0 Specification  
Revision 2019.9.0

UPC++ Specification Working Group  
[upcxx-spec@googlegroups.com](mailto:upcxx-spec@googlegroups.com)  
<https://upcxx.lbl.gov>

September 14, 2019

## Abstract

UPC++ is a C++11 library providing classes and functions that support Partitioned Global Address Space (PGAS) programming. We are revising the library under the auspices of the DOE's Exascale Computing Project, to meet the needs of applications requiring PGAS support. UPC++ is intended for implementing elaborate distributed data structures where communication is irregular or fine-grained. The UPC++ interfaces for moving non-contiguous data and handling memories with different optimal access methods are composable and similar to those used in conventional C++. The UPC++ programmer can expect communication to run at close to hardware speeds.

The key facilities in UPC++ are global pointers, that enable the programmer to express ownership information for improving locality, one-sided communication, both put/get and RPC, futures and continuations. Futures capture data readiness state, which is useful in making scheduling decisions, and continuations provide for completion handling via callbacks. Together, these enable the programmer to chain together a DAG of operations to execute asynchronously as high-latency dependencies become satisfied.

## Acknowledgments

This research was supported by the Exascale Computing Project (17-SC-20-SC), a collaborative effort of the U.S. Department of Energy Office of Science and the National Nuclear Security Administration.

Early development of UPC++ was supported by the Director, Office of Science, Office of Advanced Scientific Computing Research, of the U.S. Department of Energy under Contract No. DE-AC02-05CH11231.

## Copyright

This manuscript has been authored by an author at Lawrence Berkeley National Laboratory under Contract No. DE-AC02-05CH11231 with the U.S. Department of Energy. The U.S. Government retains, and the publisher, by accepting the article for publication, acknowledges, that the U.S. Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this manuscript, or allow others to do so, for U.S. Government purposes.

## Legal Disclaimer

This document was prepared as an account of work sponsored by the United States Government. While this document is believed to contain correct information, neither the United States Government nor any agency thereof, nor the Regents of the University of California, nor any of their employees, makes any warranty, express or implied, or assumes any legal responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by its trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof, or the Regents of the University of California. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof or the Regents of the University of California.

# Contents

<b>1</b>	<b>Overview and Scope</b>	<b>1</b>
1.1	Preliminaries . . . . .	1
1.2	Execution Model . . . . .	3
1.3	Memory Model . . . . .	4
1.4	Common Requirements . . . . .	4
1.5	Organization of this Document . . . . .	4
1.6	Conventions . . . . .	5
1.7	Glossary . . . . .	5
<b>2</b>	<b>Init and Finalize</b>	<b>9</b>
2.1	Overview . . . . .	9
2.2	Hello World . . . . .	10
2.3	API Reference . . . . .	10
<b>3</b>	<b>Global Pointers</b>	<b>13</b>
3.1	Overview . . . . .	13
3.2	API Reference . . . . .	14
<b>4</b>	<b>Storage Management</b>	<b>24</b>
4.1	Overview . . . . .	24
4.2	API Reference . . . . .	24
<b>5</b>	<b>Futures and Promises</b>	<b>28</b>
5.1	Overview . . . . .	28
5.2	The Basics of Asynchronous Communication . . . . .	29
5.3	Working with Promises . . . . .	30
5.4	Advanced Callbacks . . . . .	31
5.5	Execution Model . . . . .	34
5.6	Fulfilling Promises . . . . .	35
5.7	Lifetime and Thread Safety . . . . .	37

5.8	API Reference . . . . .	38
5.8.1	future . . . . .	38
5.8.2	promise . . . . .	41
<b>6</b>	<b>Serialization</b>	<b>44</b>
6.1	Class Serialization Interface . . . . .	44
6.2	Serialization Concepts . . . . .	46
6.3	Functions . . . . .	47
6.4	Special Handling in Remote Procedure Calls . . . . .	48
6.5	View-Based Serialization . . . . .	48
6.6	API Reference . . . . .	50
<b>7</b>	<b>Completion</b>	<b>55</b>
7.1	Overview . . . . .	55
7.2	Completion Objects . . . . .	57
7.2.1	Restrictions . . . . .	59
7.2.2	Completion and Return Types . . . . .	60
7.2.3	Default Completions . . . . .	60
7.3	API Reference . . . . .	60
<b>8</b>	<b>One-Sided Communication</b>	<b>63</b>
8.1	Overview . . . . .	63
8.2	API Reference . . . . .	63
8.2.1	Remote Puts . . . . .	63
8.2.2	Remote Gets . . . . .	65
<b>9</b>	<b>Remote Procedure Call</b>	<b>67</b>
9.1	Overview . . . . .	67
9.2	Remote Hello World Example . . . . .	68
9.3	API Reference . . . . .	68
<b>10</b>	<b>Progress</b>	<b>73</b>
10.1	Overview . . . . .	73
10.2	Restricted Context . . . . .	74
10.3	Attentiveness . . . . .	75
10.4	Thread Personas/Notification Affinity . . . . .	76
10.5	API Reference . . . . .	78
10.5.1	persona . . . . .	79
10.5.2	persona_scope . . . . .	81
10.5.3	Outgoing Progress . . . . .	83

---

<b>11 Teams</b>	<b>84</b>
11.1 Overview . . . . .	84
11.2 Local Teams . . . . .	84
11.3 API Reference . . . . .	85
11.3.1 team . . . . .	85
11.3.2 team_id . . . . .	88
11.3.3 Fundamental Teams . . . . .	89
<b>12 Collectives</b>	<b>91</b>
12.1 Common Requirements . . . . .	91
12.2 API Reference . . . . .	92
<b>13 Atomics</b>	<b>98</b>
13.1 Overview . . . . .	98
13.2 Deviations from IEEE 754 . . . . .	100
13.3 API Reference . . . . .	100
<b>14 Distributed Objects</b>	<b>107</b>
14.1 Overview . . . . .	107
14.2 Building Distributed Objects . . . . .	108
14.3 Ensuring Distributed Existence . . . . .	108
14.4 API Reference . . . . .	109
<b>15 Non-Contiguous One-Sided Communication</b>	<b>113</b>
15.1 Overview . . . . .	113
15.2 API Reference . . . . .	114
15.2.1 Requirements on Iterators . . . . .	114
15.2.2 Irregular Put . . . . .	114
15.2.3 Irregular Get . . . . .	116
15.2.4 Regular Put . . . . .	118
15.2.5 Regular Get . . . . .	119
15.2.6 Strided Put . . . . .	121
15.2.7 Strided Get . . . . .	123
<b>16 Memory Kinds</b>	<b>125</b>
16.1 Overview . . . . .	125
16.2 API Reference . . . . .	127
16.2.1 cuda_device . . . . .	127
16.2.2 device_allocator . . . . .	130
16.2.3 Data Movement . . . . .	133

<b>A</b>	<b>Notes for Implementers</b>	<b>135</b>
A.1	future_element_t . . . . .	135
A.2	future<T...>::when_all . . . . .	136
A.3	to_future . . . . .	137
A.4	future_invoke_result_t . . . . .	138
	<b>Bibliography</b>	<b>139</b>
	<b>Index</b>	<b>140</b>

# Chapter 1

## Overview and Scope

### 1.1 Preliminaries

- <sup>1</sup> UPC++ is a C++11 library providing classes and functions that support Partitioned Global Address Space (PGAS) programming. The project began in 2012 with a prototype AKA V0.1, described in the IPDPS14 paper by *Zheng et al.* [5]. This document describes a production version, V1.0, with the addition of several features and a new asynchronous API. For a peer-reviewed overview of the new version, see the IPDPS19 paper [4].
- <sup>2</sup> Under the PGAS model, a distributed memory parallel computer is viewed abstractly as a collection of *processing elements*, an individual computing resource, each with *local memory* (see Fig. 1.1). A processing element is called a *process* in UPC++. The execution model of UPC++ is SPMD and the number of UPC++ processes is fixed during program execution.
- <sup>3</sup> As with conventional C++ threads programming, processes can access their respective local memory via a pointer. However, the PGAS abstraction supports a global address space, which is allocated in *shared segments* distributed over the processes. A *global pointer* enables the programmer to move data in the shared segments between processes as shown in Fig. 1.1. As with threads programming, references made via global pointers are subject to race conditions, and appropriate synchronization must be employed.
- <sup>4</sup> UPC++ global pointers are fundamentally different from conventional C-style pointers. A global pointer refers to a location in a shared segment. It cannot be dereferenced using the `*` operator, and it does not support conversions between pointers to base and derived types. It also cannot be constructed by the address-of operator. On the other hand, UPC++ global

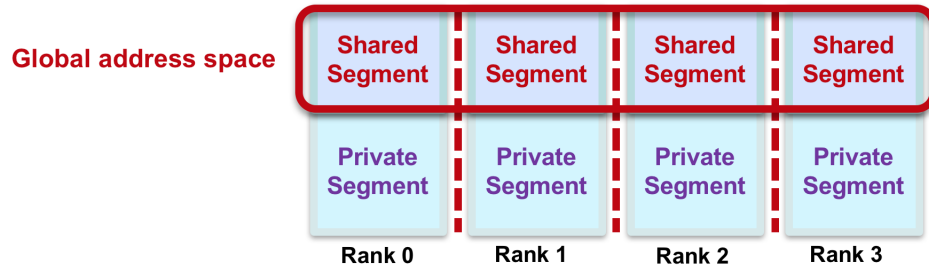


Figure 1.1: Abstract Machine Model of a PGAS program memory

pointers *do* support some properties of a regular C pointer, such as pointer arithmetic and passing a pointer by value.

- 5 Notably, global pointers are used in *one-sided* communication: bulk copying operations (RMA) similar to *memcpy* but across processes (Ch. 8), and in Remote Procedure Calls (RPC, Ch. 9). RPC enables the programmer to ship functions to other processes, which is useful in managing irregular distributed data structures. These processes can push or pull data via global pointers. *Futures* and *Promises* (Ch. 5) are used to determine completion of communication or to provide handlers that respond to completion. Wherever possible, UPC++ will engage low-level hardware support for communication and this capability is crucial to UPC++’s support of *lightweight communication*.
- 6 UPC++’s design philosophy is to provide “close to the metal performance.” To meet this requirement, UPC++ imposes certain restrictions. In particular, non-blocking communication is the default for nearly all operations defined in the API, and all communication is explicit. These two restrictions encourage the programmer to write code that is performant and make it more difficult to write code that is not. Conversely, UPC++ relaxes some restrictions found in models such as MPI; in particular, it does not impose an in-order delivery requirement between separate communication operations. The added flexibility increases the possibility of overlapping communication and scheduling it appropriately.
- 7 UPC++ also avoids non-scalable constructs found in models such as UPC. For example, it does not support shared distributed arrays or shared scalars. Instead, it provides distributed objects, which can be used to similar ends (Ch. 14). Distributed objects are useful in solving the *bootstrapping problem*, whereby processes need to distribute their local copies of global pointers to other processes. Though UPC++ does not directly provide multidimensional arrays, applications that use UPC++ may define them. To this end, UPC++ supports non-contiguous data transfers: vector, indexed, and strided data (Ch. 15).
- 8 Because UPC++ does not provide separate concurrent threads to manage progress, UPC++ must manage all progress inside active calls to the library. UPC++ has been designed with a



policy against the use of internal operating system threads. The strengths of this approach are improved user-visibility into the resource requirements of UPC++ and better interoperability with software packages and their possibly restrictive threading requirements. The consequence, however, is that the user must be conscientious to balance the need for making progress against the application's need for CPU cycles. Chapter 10 discusses subtleties of managing progress and how an application can arrange for UPC++ to advance the state of asynchronous communication.

- <sup>9</sup> Processes may be grouped into teams (Ch. 11). A team can participate in collective operations. Teams are also the interface that UPC++ uses to propagate the shared memory capabilities of the underlying hardware and operating system and can let a programmer reason about hierarchical processor-memory organization, allowing an application to reduce its memory footprint. UPC++ supports atomic operations, currently on remote 32-bit and 64-bit integers. Atomics are useful in managing distributed queues, hash tables, and so on. However, as explained in the discussion below on UPC++'s memory model, atomics are split phased and not handled the same way as they are in C++11 and other libraries.
- <sup>10</sup> UPC++ will support memory kinds (Ch. 16), whereby the programmer can identify regions of memory requiring different access methods or having different performance properties, such as device memory. Since memory kinds will be implemented in Year 2, we will defer their detailed discussion until next year.

## 1.2 Execution Model

- <sup>1</sup> The UPC++ internal state contains, for each process, internal unordered queues that are managed for the user. The UPC++ progress engine scans these queues for operations initiated by this process, as well as externally generated operations that target this process. The progress engine is active inside UPC++ calls only and is quiescent at other times, as there are no threads or background processes executing inside UPC++. This passive stance permits UPC++ to be driven by any other execution model a user might choose. This universality does place a small burden on the user: calling into the `progress` function. UPC++ relies on the user to make periodic calls into the `progress` function to ensure that UPC++ operations are completed. `progress` is the mechanism by which the user loans UPC++ a thread of execution to perform operations that target the given process. The user can determine that a specific operation completes by checking the status of its associated `future`, or by attaching a completion handler to the operation.
- <sup>2</sup> UPC++ presents a *thread-aware* programming model. It assumes that only one thread of execution is interacting with any UPC++ object. The abstraction for thread-awareness in UPC++ is the *persona*. A `future` produced by a thread of execution is associated with its

persona, and transferring the `future` to another thread must be accompanied by transferring the underlying persona. Each process has a *master persona*, initially attached to the thread that calls `init`. Some UPC++ operations, such as `barrier`, require a thread to have exclusive access to the master persona to call them. Thus, the programmer is responsible for ensuring synchronized access to both personas and memory, and that access to shared data does not interfere with the internal operation of UPC++.

## 1.3 Memory Model

- <sup>1</sup> The UPC++ memory model differs from that of C++11 (and beyond) in that all updates are split-phased: every communication operation has a distinct initiate and wait step. Thus, atomic operations execute over a time interval, and the time intervals of successive operations that target the same datum must not overlap, or a data race will result.
- <sup>2</sup> UPC++ differs from MPI in that it doesn't guarantee in-order delivery. For example, if we overlap two successive RPC operations involving the same source and destination process, we cannot say which one completes first.

## 1.4 Common Requirements

- <sup>1</sup> Unless explicitly stated otherwise, the requirements in [res.on.arguments] in the C++ standard apply to UPC++ functions as well. In particular, if a local or global pointer passed to a UPC++ function is invalid for its intended use, the behavior of the function is undefined.
- <sup>2</sup> For UPC++ functions with a *Precondition(s)* clause, violation of the preconditions results in undefined behavior.

## 1.5 Organization of this Document

- <sup>1</sup> This specification is intended to be a normative reference, not a tutorial on learning to use the library. A Programmer's Guide is available from <https://upcxx.lbl.gov> and is a good tutorial to gain a working understanding of the library.
- <sup>2</sup> The organization for the rest of the document is as follows. Chapter 2 discusses the process of starting up and closing down UPC++. Global pointers (Ch. 3) are fundamental to the PGAS model, and Chapter 4 discusses shared heap storage management. UPC++ supports

aggressively asynchronous communication and provides futures and promises (Ch. 5) to manage asynchronous operations and control flow. Chapter 6 discusses how C++ objects are serialized for communication. Chapter 7 describes the different completion models available for UPC++ communication operations. Chapters 8 and 9 describe two core forms of asynchronous one-sided communication, `rput/rget` and RPC, respectively. Chapter 10 discusses progress. Chapter 11 discusses teams, which are a means of organizing UPC++ processes, and Chapter 12 describes collective communication operations. Chapter 13 discusses atomic operations on shared memory. Chapter 14 discusses distributed objects. Chapter 15 discusses non-contiguous one-sided RMA transfers. Chapter 16 discusses memory kinds for device memory.

## 1.6 Conventions

1. C++ language keywords are in the color `mocha`.
2. UPC++ terms are set in the color `bright blue` except when they appear in a synopsis framebox.
3. All functions are declared `noexcept` unless specifically called out.
4. All entities are in the `upcxx` namespace unless otherwise qualified.
5. All entities are declared by the header `upcxx/upcxx.hpp`, unless otherwise specified.

## 1.7 Glossary

- <sup>1</sup> **Affinity.** A binding of each location in a shared or device segment to a particular process (generally the process which allocated that shared object). Every byte of shared memory has affinity to exactly one process (at least logically).
- <sup>2</sup> **C++ Concepts.** E.g. `TriviallyCopyable`. This document references C++ Concepts as defined in the C++14 standard [3] when specifying the semantics of types. However, compliant implementations are still possible within a compiler adhering to the earlier C++11 standard [2].
- <sup>3</sup> **Collective.** A constraint placed on some language operations which requires evaluation of such operations to be matched across all participating processes. The behavior of collective operations is undefined unless all processes execute the same sequence of collective operations.

- 4 A collective operation need not provide any actual synchronization between processes, unless otherwise noted. The collective requirement simply states a relative ordering property of calls to collective operations that must be maintained in the parallel execution trace for all executions of any valid program. Some implementations may include unspecified synchronization between processes within collective operations, but programs must not rely upon the presence or absence of such unspecified synchronization for correctness.
- 5 **Collective object.** (16) A semantic binding of objects constructed and destroyed collectively by the processes in a team.
- 6 **DefinitelySerializable.** (6) A C++ type that is either `DefinitelyTriviallySerializable`, or for which there is a user-supplied implementation of the visitor function `serialize`.
- 7 **DefinitelyTriviallySerializable.** (6) A C++ type that is either `TriviallyCopyable` and has no user-supplied implementation of the visitor function, or for which the trait `is_definitely_trivially_serializable` is specialized to have a member value that is true.
- 8 **Device.** (16) A physical device with storage that is distinct from main memory.
- 9 **Device segment.** (16) A region of storage associated with a device that is used to allocate objects that are accessible by any process.
- 10 **Futures (and Promises).** (5) The primary mechanisms by which a UPC++ application interacts with non-blocking operations. The semantics of futures and promises in UPC++ differ from the those of standard C++. While futures in C++ facilitate communicating between threads, the intent of UPC++ futures is solely to provide an interface for managing and composing non-blocking operations, and they cannot be used directly to communicate between threads or processes. A future is the interface through which the status of the operation can be queried and the results retrieved, and multiple future objects may be associated with the same promise. A future thus represents the consumer side of a non-blocking operation. A promise represents the producer side of the operation, and it is through the promise that the results of the operation are supplied and its dependencies fulfilled.
- 11 **Global pointer.** (3) The primary way to address memory in a shared memory segment of a UPC++ program. Global pointers can themselves be stored in shared memory or otherwise passed between processes and retain their semantic meaning to any process.
- 12 **Local.** (11.2) Refers to an object or reference with affinity to a process in the local team.
- 13 **Operation completion.** (7) The condition where a communication operation is complete with respect to the initiating process, such that its effects are visible and that

resources, such as source and destination memory regions, are no longer in use by UPC++.

- 14 **Persona.** (10.4) The abstraction for thread-awareness in UPC++. A UPC++ persona object represents a collection of UPC++-internal state usually attributed to a single thread. By making it a proper construct, UPC++ allows a single OS thread to switch between multiple application-defined roles for processing notifications. Personas act as the receivers for notifications generated by the UPC++ runtime.
- 15 **Private object.** An object outside the shared space that can be accessed only by the process that owns it (e.g. an object on the program stack).
- 16 **Process.** (1) An OS process with associated system resources that is a member of a UPC++ parallel job execution. UPC++ uses a SPMD execution model, and the number of processes is fixed during a given program execution. The placement of processes across physical processors or NUMA domains is implementation-defined.
- 17 **Progress.** (10) The means by which the application allows the UPC++ runtime to advance the state of outstanding operations initiated by this or other processes, to ensure they eventually complete.
- 18 **Rank.** (11) An integer index that identifies a unique UPC++ process within a UPC++ [team](#).
- 19 **Referentially transparent.** A routine that is is a pure function, where inputs alone determine the value returned by the function. For the same inputs, repeated calls to a referentially transparent function will always return the same result.
- 20 **Remote.** Refers to an object or reference whose affinity is not local to the current process.
- 21 **Remote Procedure Call.** A communication operation that injects a function call invocation into the execution stream of another process. These injections are one-sided, meaning the target process need not explicitly expect the incoming operation or perform any specific action to receive it, aside from invoking UPC++ progress.
- 22 **Source completion.** The condition where a communication operation initiated by the current process has advanced to a point where serialization of the local source memory regions for the operation has occurred, and the contents of those regions can be safely overwritten or reclaimed without affecting the behavior of the ongoing operation. Source completion does not generally imply operation completion, and other effects of the operation (e.g., updating destination memory regions, or delivery to a remote process) may still be in-progress.
- 23 **Shared segment.** A region of storage associated with a particular process that is used to allocate shared objects that are accessible by any process.

- <sup>24</sup> **Team.** (11) A UPC++ object representing an ordered set of processes. Each process in a team has a unique 0-based rank index.
- <sup>25</sup> **Thread (or OS thread).** An independent stream of executing instructions with private state. A process may contain many threads (created by the application), and each is associated with at least one persona.
- <sup>26</sup> **Serializable.** (6) A C++ type that is either DefinitelySerializable or TriviallySerializable.
- <sup>27</sup> **TriviallySerializable.** (6) A C++ type that is valid to serialize by making a byte copy of an object.

# Chapter 2

## Init and Finalize

### 2.1 Overview

- <sup>1</sup> The `init` function must be called before any other UPC++ function can be invoked. This can happen anywhere in the program, so long as it appears before any UPC++ calls that require the library to be in an initialized state. The call is *collective*, meaning every process in the parallel job must enter this function if any are to participate in UPC++ operations. While `init` can be called more than once by each process in a program, only the first invocation will initialize UPC++, and the rest will merely increment the internal count of how many times `init` has been called. For each `init` call, a matching `finalize` call must eventually be made. `init` and `finalize` are not re-entrant and must be called by only a single thread of execution in each process. The thread that calls `init` has the *master persona* attached to it (see section 10.5.1 for more details of threading behavior). After the number of calls to `finalize` matches the number of calls to `init`, no UPC++ function that requires the library to be in an initialized state can be invoked until UPC++ is reinitialized by a subsequent call to `init`.
- <sup>2</sup> All UPC++ operations require the library to be in an initialized state unless otherwise specified, and violating this requirement results in undefined behavior. Member functions, constructors, and destructors are included in the set of operations that require UPC++ to be initialized, unless explicitly stated otherwise.

```
1 #include <upcxx/upcxx.hpp>
2 #include <iostream>
3 int main(int argc, char *argv[])
4 {
5     upcxx::init(); // initialize UPC++
6
7     std::cout << "Hello World"
8         << " ranks:" << upcxx::rank_n() // how many processes?
9         << " my rank: " << upcxx::rank_me() // which process am I?
10        << std::endl;
11
12     upcxx::finalize(); // finalize UPC++
13     return 0;
14 }
```

Figure 2.1: *HelloWorld.cpp* program

## 2.2 Hello World

- 1 A UPC++ installation should be able to compile and execute the simple *Hello World* program shown in Figure 2.1. The output of *Hello World*, however, is platform-dependent and may vary between different runs, since there is no synchronization to order the output between processes. Depending on the nature of the buffering protocol of `stdout`, output from different processes may even be interleaved.

## 2.3 API Reference

```
1 void init();
```

- 2 *Precondition:* Called collectively by all processes in the parallel job. Calling thread must have the master persona (§10.5.1) if UPC++ is in an already-initialized state.

- 3 If there have been no previous calls to `init`, or if all previous calls to `init` have had matching calls to `finalize`, then this routine initializes the UPC++ library. Otherwise, leaves the library's state as is. Upon return, the calling thread will be attached to the master persona (§10.5.1).

- 4 *This function may be called when UPC++ is in the uninitialized state.*



5 `bool initialized();`

6 Returns whether or not UPC++ is in the initialized state. UPC++ is initialized if there has been at least one previous call to `init` that has not had a matching call to `finalize`.

7 *This function may be called when UPC++ is in the uninitialized state.*

8 `void finalize();`

9 *Precondition:* Called collectively by all processes in the parallel job. Calling thread must have the master persona (§10.5.1), and UPC++ must be in an already-initialized state.

10 If this call matches the call to `init` that placed UPC++ in an initialized state, then this call uninitializes the UPC++ library. Otherwise, this function does not alter the library's state.

11 Before uninitializing the UPC++ library, `finalize` shall execute a (blocking) `barrier()` over `team world()`. If this call uninitializes the UPC++ library while there are any asynchronous operations still in-flight (after the barrier), behavior is undefined. An operation is defined as in-flight if it was initiated but still requires internal-level or user-level progress from any persona on any process in the job before it can complete. It is left to the application to define and implement their own specific approach to ensuring quiescence of in-flight operations. A potential quiescence API is being considered for future versions and feedback is encouraged.

12 *UPC++ progress level: user*

13 `#define UPCXX_SPEC_VERSION 20190900L`

14 A macro definition to an integer literal identifying the version of this specification. Implementations complying to this specification shall define the value shown above. It is intended that future versions of this specification will replace the value of this macro with a greater value.

15 `#define UPCXX_VERSION /* implementation-defined */`

16 A macro definition to an integer literal identifying the version of the implementation. Values are implementation-defined, but are recommended to be monotonically non-decreasing for subsequent revisions of the same implementation.

17 `char *getenv_console(const char *env_var);`

18 The `getenv_console` function searches an environment list, provided by the host environment, for a string that matches the string pointed to by `env_var`.

19 The function returns a pointer to a string associated with the matched list member. The string pointed to shall not be modified by the program, but may be overwritten by a subsequent call to the `getenv_console` function. If the specified name cannot be found, a null pointer is returned.

20 It is unspecified whether and how functions that modify the POSIX environment (`std::setenv`, `std::unsetenv`, `std::putenv`, etc.) affect the return values of this function.

21 *Advice to users:* On some platforms, environment variables provided by the spawning console might not be propagated to the POSIX environment of all UPC++ processes. This function's semantics are the same as `std::getenv()`, except that if `env_var` was set in the environment of the spawning console, that value is instead returned. UPC++ programs are recommended to use this function instead of `std::getenv()` to help ensure portability.

22 *Note:* As with most library functions, this function requires UPC++ to be in an already-initialized state.

23 *UPC++ progress level:* **none**

# Chapter 3

## Global Pointers

### 3.1 Overview

- <sup>1</sup> The UPC++ `global_ptr` is the primary way to address memory in a remote shared memory segment of a UPC++ program. The next chapter discusses how memory in the shared segment is allocated to the user.
- <sup>2</sup> As mentioned in Chapter 1, a global pointer is a handle that may not be dereferenced. This restriction follows from the design decision to prohibit implicit communication. Logically, a global pointer has two parts: a raw C++ pointer and an associated *affinity*, which is a binding of each location in a shared or device (Ch. 16) segment to a particular process (generally the process which allocated that shared object). In cases where the use of a `global_ptr` executes in a process that has direct load/store access to the memory of the `global_ptr` (i.e. `is_local` is `true`), we may extract the raw pointer component, and benefit from the reduced cost of employing a local reference rather than a global one. To this end, UPC++ provides the `local()` function, which returns a raw C++ pointer. Calling `local()` on a `global_ptr` that references an address in a remote shared segment or a device location to which the caller does not have load/store access results in undefined behavior.
- <sup>3</sup> Global pointers have the following guarantees:
  1. A `global_ptr<T, Kind>` is only valid if it is the null global pointer, it references a valid object, or it represents one element past the end of a valid array or non-array object.

2. Two global pointers compare equal if and only if they reference the same object, one past the end of the same array or non-array object, or are both null.
3. Equality of global pointers corresponds to observational equality, meaning that two global pointers which compare equal will produce equivalent behavior when interchanged.
- 4 These facts become important given that UPC++ allows two processes which are local to each other to map the same memory into their own virtual address spaces but possibly with different virtual addresses. They also ensure that a global pointer can be viewed from any process to mean the same thing without need for translation.
- 5 Global pointers are parameterized by the kind of memory they can refer to. A global pointer of type `global_ptr<T, Kind>` can only refer to memory on devices described by `Kind`, and the referenced memory may be located on a device attached to a local or remote process. The default global pointer, `global_ptr<T, memory_kind::host>`, can only refer to host memory on a local or remote process. A `global_ptr<T, memory_kind::any>` can refer to either host memory or memory on any device associated with a local or remote process.
- 6 Most UPC++ communication operations only operate on host memory, working on the default `global_ptr<T>`. Functions that work with device memory are additionally parameterized by memory kind, working with general types such as `global_ptr<T, Kind>`.

## 3.2 API Reference

```
1 using intrank_t = /* implementation-defined */;
```

- 2 An implementation-defined signed integer type that represents a UPC++ rank ID.

```
3 enum class memory_kind {  
    any = /* unspecified */,  
    host = /* unspecified */,  
    cuda_device = /* unspecified */  
};
```

Constants used with a global pointer to specify the kind of memory (Ch. 16) that may be referenced by the global pointer.

```
4 template<typename T, memory_kind Kind = memory_kind::host>
  struct global_ptr;
```

5 *C++ Concepts:* DefaultConstructible, TriviallyCopyable, TriviallyDestructible,  
EqualityComparable, LessThanComparable, hashable

6 *UPC++ Concepts:* DefinitelyTriviallySerializable

7 T must not have any cv qualifiers: `std::is_const<T>::value` and  
`std::is_volatile<T>::value` must both be false.

```
8 template<typename T, memory_kind Kind>
  struct global_ptr {
    using element_type = T;
    // ...
  };
```

9 Member type that is an alias for the template parameter T.

```
10 template<typename T, memory_kind Kind>
    [static] const memory_kind global_ptr<T, Kind>::kind = Kind;
```

11 Constant that has the same value as the Kind template parameter.

```
12 template<typename T, memory_kind Kind>
  global_ptr<T, Kind>::global_ptr(std::nullptr_t = nullptr);
```

13 Constructs a global pointer corresponding to a null pointer.

14 *This function may be called when UPC++ is in the uninitialized state.*

15 *UPC++ progress level: none*

```
16 template<typename T>
  template<memory_kind Kind>
  global_ptr<T, memory_kind::any>::global_ptr(
    global_ptr<T, Kind> other);
```

17 Constructs a global pointer with kind `memory_kind::any` from an existing  
global pointer.

18 *UPC++ progress level: none*

```
19 template<typename T, memory_kind Kind>  
   global_ptr<T, Kind>::~global_ptr();
```

20 Trivial destructor. Does not delete or otherwise reclaim the raw pointer that this global pointer is referencing.

21 *This function may be called when UPC++ is in the uninitialized state.*

22 *UPC++ progress level: none*

```
23 template<typename T>  
   global_ptr<T> to_global_ptr(T* ptr);
```

24 *Precondition:* `ptr` is a null pointer, or a valid pointer to host memory such that the expression `*ptr` on the calling process yields a (possibly uninitialized) object of type `T` that resides within the shared segment of a process in the local team (§11.2) of the caller

25 Constructs a global pointer corresponding to the given raw pointer.

26 *UPC++ progress level: none*

```
27 template<typename T>  
   global_ptr<T> try_global_ptr(T* ptr);
```

28 *Precondition:* `ptr` is a null pointer, or a valid pointer to host memory such that the expression `*ptr` on the calling process yields a (possibly uninitialized) object of type `T`

29 If the object referenced by `*ptr` resides within the shared segment of a process in the local team (§11.2) of the caller, returns a global pointer referencing that object. Otherwise returns a null pointer.

30 *UPC++ progress level: none*

```
31 template<typename T, memory_kind Kind>  
   memory_kind global_ptr<T, Kind>::dynamic_kind() const;
```

32 If `!is_null()`, returns the actual memory kind associated with the memory referenced by this pointer.

If `is_null()`, the result is unspecified.

33 *UPC++ progress level: none*

```
34 template<typename T, memory_kind Kind>  
    bool global_ptr<T, Kind>::is_local() const;
```

35 Returns whether or not the calling process has load/store access to the memory referenced by this pointer. Returns true if this is a null pointer, regardless of the context in which this query is called. Otherwise, the result is unspecified if this pointer targets device memory (i.e. `dynamic_kind() != memory_kind::host`).

36 *UPC++ progress level: none*

```
37 template<typename T, memory_kind Kind>  
    bool global_ptr<T, Kind>::is_null() const;
```

38 Returns whether or not this global pointer corresponds to the null value, meaning that it references no memory. This query is purely a function of the global pointer instance, it is not affected by the context in which it is called.

39 *UPC++ progress level: none*

```
40 template<typename T, memory_kind Kind>  
    [explicit] bool global_ptr<T, Kind>::operator bool() const;
```

41 Explicit conversion operator that returns `!is_null()`.

42 *UPC++ progress level: none*

```
43 template<typename T, memory_kind Kind>  
    T* global_ptr<T, Kind>::local() const;
```

44 *Precondition: this->is\_local()*

45 Converts this global pointer into a raw pointer.

46 *UPC++ progress level: none*

```
47 template<typename T, memory_kind Kind>  
   inrank_t global_ptr<T, Kind>::where() const;
```

48 Returns the rank in team `world()` of the process with affinity to the T object pointed-to by this global pointer. The return value for `where()` on a null global pointer is an implementation-defined value.

49 For a non-null device pointer (`dynamic_kind() != memory_kind::host`), returns the rank in team `world()` of the process that allocated the memory referenced by this pointer. The result is undefined if this pointer references unallocated memory.

50 This query is purely a function of the global pointer instance, it is not affected by the context in which it is called.

51 *UPC++ progress level: none*

```
52 template<typename T, memory_kind Kind>  
   global_ptr<T, Kind>  
       global_ptr<T, Kind>::operator+(std::ptrdiff_t diff) const;  
template<typename T, memory_kind Kind>  
global_ptr<T, Kind>  
       operator+(std::ptrdiff_t diff, global_ptr<T, Kind> ptr);  
template<typename T, memory_kind Kind>  
global_ptr<T, Kind>&  
       global_ptr<T, Kind>::operator+=(std::ptrdiff_t diff);
```

53 *Precondition:* Either `diff == 0`, or the global pointer is pointing to the `i`th element of an array of `N` elements, where `i` may be equal to `N`, representing a one-past-the-end pointer. At least one of the indices `i+diff` or `i+diff-1` must be a valid element of the same array. A pointer to a non-array object is treated as a pointer to an array of size 1.

54 If `diff == 0`, returns a copy of the global pointer. Otherwise produces a pointer that references the element that is at `diff` positions greater than the current element, or a one-past-the-end pointer if the last element of the array is at `diff-1` positions greater than the current.

55 `operator+=` modifies the `global_ptr` in-place and returns a reference to this pointer after the operation.

56 These routines are purely functions of their arguments, they are not affected by the context in which they are called.

57 *UPC++ progress level: none*



---

```

58 template<typename T, memory_kind Kind>
   global_ptr<T, Kind>
       global_ptr<T, Kind>::operator-(std::ptrdiff_t diff) const;
template<typename T, memory_kind Kind>
global_ptr<T, Kind>&
   global_ptr<T, Kind>::operator--(std::ptrdiff_t diff);

```

59 *Precondition:* Either `diff == 0`, or the global pointer is pointing to the `i`th element of an array of `N` elements, where `i` may be equal to `N`, representing a one-past-the-end pointer. At least one of the indices `i-diff` or `i-diff-1` must be a valid element of the same array. A pointer to a non-array object is treated as a pointer to an array of size 1.

60 If `diff == 0`, returns a copy of the global pointer. Otherwise produces a pointer that references the element that is at `diff` positions less than the current element, or a one-past-the-end pointer if the last element of the array is at `diff+1` positions less than the current.

61 `operator--` modifies the `global_ptr` in-place and returns a reference to this pointer after the operation.

62 These routines are purely a function of their arguments, they are not affected by the context in which they are called.

63 *UPC++ progress level: none*

```

64 template<typename T, memory_kind Kind>
   std::ptrdiff_t
       global_ptr<T, Kind>::operator-(global_ptr<T, Kind> rhs) const;

```

65 *Precondition:* Either `*this == rhs`, or this global pointer is pointing to the `i`th element of an array of `N` elements, and `rhs` is pointing at the `j`th element of the same array. Either pointer may also point one past the end of the array, so that `i` or `j` is equal to `N`. A pointer to a non-array object is treated as a pointer to an array of size 1.

66 If `*this == rhs`, results in 0. Otherwise, returns `i-j`.

67 This routine is purely a function of its arguments, it is not affected by the context in which it is called.

68 *UPC++ progress level: none*

```
69 template<typename T, memory_kind Kind>
   global_ptr<T, Kind>& global_ptr<T, Kind>::operator++();
   template<typename T, memory_kind Kind>
   global_ptr<T, Kind> global_ptr<T, Kind>::operator++(int);
   template<typename T, memory_kind Kind>
   global_ptr<T, Kind>& global_ptr<T, Kind>::operator--();
   template<typename T, memory_kind Kind>
   global_ptr<T, Kind> global_ptr<T, Kind>::operator--(int);
```

70 *Precondition:* In the first two variants, the global pointer must be pointing to an element of an array or to a non-array object. In the third and fourth variants, the global pointer must either be pointing to the  $i$ th element of an array, where  $i \geq 1$ , or one element past the end of an array or a non-array object.

71 Modifies this pointer to have the value `*this + 1` in the first two variants and `*this - 1` in the third and fourth variants.

The first and third variants return a reference to this pointer. The second and fourth variants return a copy of the original pointer.

72 This routine is purely a function of its instance, it is not affected by the context in which it is called.

73 *UPC++ progress level:* none

```
74 template<typename T, memory_kind Kind>
   bool global_ptr<T, Kind>::operator==(
       global_ptr<T, Kind> rhs) const;
   template<typename T, memory_kind Kind>
   bool global_ptr<T, Kind>::operator!=(
       global_ptr<T, Kind> rhs) const;
   template<typename T, memory_kind Kind>
   bool global_ptr<T, Kind>::operator<(
       global_ptr<T, Kind> rhs) const;
   template<typename T, memory_kind Kind>
   bool global_ptr<T, Kind>::operator<=(
       global_ptr<T, Kind> rhs) const;
   template<typename T, memory_kind Kind>
   bool global_ptr<T, Kind>::operator>(
       global_ptr<T, Kind> rhs) const;
   template<typename T, memory_kind Kind>
   bool global_ptr<T, Kind>::operator>=(
       global_ptr<T, Kind> rhs) const;
```

75 Returns the result of comparing two global pointers. Two global pointers compare equal if they both represent null pointers, or if they represent the same memory address with affinity to the same process. All other global pointers compare unequal.

76 If `Kind == memory_kind::any`, then two non-null global pointers compare equal only if the memory locations they reference have affinity to the same process and represent the same memory address on the same device.

77 A pointer to a non-array object is treated as a pointer to an array of size one. If two global pointers point to different elements of the same array, or to subobjects of two different elements of the same array, then the pointer to the element at the higher index compares greater than the pointer to the element at the lower index. If one pointer points to an element of an array or to a subobject of an element of an array, and the other pointer points one past the end of the array, then the latter compares greater than the former.

78 If global pointers `p` and `q` compare equal, then `p == q`, `p <= q`, and `p >= q` all result in true while `p != q`, `p < q`, and `p > q` all result in false. If `p` and `q` do not compare equal, then `p != q` is true while `p == q` is false.

79 If `p` compares greater than `q`, then `p > q`, `p >= q`, `q < p`, and `q <= p` all result in true while `p < q`, `p <= q`, `q > p`, and `q >= p` all result in false.

80 All other comparisons result in an unspecified value.

81 These routines are purely functions of their arguments, they are not affected by the context in which they are called.

82 *UPC++ progress level: none*

```
83 namespace std {
    template<typename T, memory_kind Kind>
    struct less<global_ptr<T, Kind>>;
    template<typename T, memory_kind Kind>
    struct less_equal<global_ptr<T, Kind>>;
    template<typename T, memory_kind Kind>
    struct greater<global_ptr<T, Kind>>;
    template<typename T, memory_kind Kind>
    struct greater_equal<global_ptr<T, Kind>>;
    template<typename T, memory_kind Kind>
    struct hash<global_ptr<T, Kind>>;
}
```

84 Specializations of STL function objects for performing comparisons and computing hash values on global pointers. The specializations of `std::less`, `std::less_equal`, `std::greater`, and `std::greater_equal` all produce a strict total order over global pointers, even if the comparison operators do not. This strict total order is consistent with the partial order defined by the comparison operators.

85 *UPC++ progress level: none*

```
86 template<typename T, memory_kind Kind>  
std::ostream& operator<<(std::ostream &os,  
                        global_ptr<T, Kind> ptr);
```

87 Inserts an implementation-defined character representation of `ptr` into the output stream `os`. The textual representation of two objects of type `global_ptr<T, Kind>` is identical if and only if the two global pointers compare equal.

88 *UPC++ progress level: none*

```
89 template<typename T, typename U, memory_kind Kind>  
global_ptr<T, Kind>  
    static_pointer_cast(global_ptr<U, Kind> ptr);  
template<typename T, typename U, memory_kind Kind>  
global_ptr<T, Kind>  
    reinterpret_pointer_cast(global_ptr<U, Kind> ptr);
```

90 *Precondition:* The expression `static_cast<T*>((U*)nullptr)` must be well-formed for the first variant, and `reinterpret_cast<T*>((U*)nullptr)` must be well-formed for the second variant.

91 Constructs a global pointer whose underlying raw pointer is obtained by using a cast expression on that of `ptr`. The affinity of the result is the same as that of `ptr`.

92 If `rp` is the raw pointer of `ptr`, then the raw pointer of the result is constructed by `static_cast<T*>(rp)` for the first variant and `reinterpret_cast<T*>(rp)` for the second.

93 *UPC++ progress level: none*

```
94 template<memory_kind ToKind, typename T, memory_kind FromKind>  
global_ptr<T, ToKind>  
    static_kind_cast(global_ptr<T, FromKind> ptr);  
95 template<memory_kind ToKind, typename T, memory_kind FromKind>  
global_ptr<T, ToKind>  
    dynamic_kind_cast(global_ptr<T, FromKind> ptr);
```

95 *Precondition:* `ptr.is_null() || ToKind == memory_kind::any ||`  
`ptr.dynamic_kind() == ToKind` for the first variant

96 Constructs a global pointer with kind `ToKind` from an existing global pointer with kind `FromKind`. It is an error if `ToKind != FromKind` and neither `ToKind` nor `FromKind` is `memory_kind::any`.

In the second variant, the result is a null pointer if `ptr.dynamic_kind() != ToKind` and `ToKind != memory_kind::any`.

97 *UPC++ progress level:* none

# Chapter 4

## Storage Management

### 4.1 Overview

- 1 UPC++ provides two flavors of storage allocation involving the shared segment. The pair of functions `new_` and `delete_` will call the class constructors and destructors, respectively, as well as allocate and deallocate memory from the shared segment. The pair `allocate` and `deallocate` allocate and deallocate dynamic memory from the shared segment, but do not call C++ constructors or destructors. A user may call these functions directly, or use placement new, or other memory management practices.

### 4.2 API Reference

```
1 template<typename T, typename ...Args>  
  global_ptr<T> new_(Args &&...args);
```

2     *Precondition:* `T(args...)` must be a valid call to a constructor for `T`.

3     Allocates space for an object of type `T` from the shared segment of the calling process. If the allocation succeeds, returns a pointer to the start of the allocated memory, and the object is initialized by invoking the constructor `T(args...)`. If the allocation fails, throws `std::bad_alloc`.

4     *Exceptions:* May throw `std::bad_alloc` or any exception thrown by the call `T(args...)`.

5     *UPC++ progress level:* none

```
6 template<typename T, typename ...Args>
global_ptr<T> new_(const std::nothrow_t &tag, Args &&...args);
```

7 *Precondition:* `T(args...)` must be a valid call to a constructor for `T`.

8 Allocates space for an object of type `T` from the shared segment of the calling process. If the allocation succeeds, returns a pointer to the start of the allocated memory, and the object is initialized by invoking the constructor `T(args...)`. If the allocation fails, returns a null pointer.

9 *Exceptions:* May throw any exception thrown by the call `T(args...)`.

10 *UPC++ progress level:* none

```
11 template<typename T>
global_ptr<T> new_array(size_t n);
```

12 *Precondition:* `T` must be `DefaultConstructible`.

13 Allocates space for an array of `n` objects of type `T` from the shared segment of the calling process. If the allocation succeeds, returns a pointer to the start of the allocated memory, and the objects are initialized by invoking their default constructors. If the allocation fails, throws `std::bad_alloc`.

14 *Exceptions:* May throw `std::bad_alloc` or any exception thrown by the call `T()`. If an exception is thrown by the constructor for `T`, then previously initialized elements are destroyed in reverse order of construction.

15 *UPC++ progress level:* none

```
16 template<typename T>
global_ptr<T> new_array(size_t n, const std::nothrow_t &tag);
```

17 *Precondition:* `T` must be `DefaultConstructible`.

18 Allocates space for an array of `n` objects of type `T` from the shared segment of the calling process. If the allocation succeeds, returns a pointer to the start of the allocated memory, and the objects are initialized by invoking their default constructors. If the allocation fails, returns a null pointer.

19 *Exceptions:* May throw any exception thrown by the call `T()`. If an exception is thrown by the constructor for `T`, then previously initialized elements are destroyed in reverse order of construction.

20 *UPC++ progress level:* none

```
21 template<typename T>  
    void delete_(global_ptr<T> g);
```

22 *Precondition:* T must be Destructible. g must be either a null pointer or a non-deallocated pointer that resulted from a call to `new_<T, Args...>` on the calling process, for some value of `Args...`.

23 If g is not a null pointer, invokes the destructor on the given object and deallocates the storage allocated to it. Does nothing if g is a null pointer.

24 *Exceptions:* May throw any exception thrown by the the destructor for T.

25 *UPC++ progress level:* none

```
26 template<typename T>  
    void delete_array(global_ptr<T> g);
```

27 *Precondition:* T must be Destructible. g must be either a null pointer or a non-deallocated pointer that resulted from a call to `new_array<T>` on the calling process.

28 If g is not a null pointer, invokes the destructor on each object in the given array and deallocates the storage allocated to it. Does nothing if g is a null pointer.

29 *Exceptions:* May throw any exception thrown by the the destructor for T.

30 *UPC++ progress level:* none

```
31 void* allocate(size_t size,  
                size_t alignment = alignof(std::max_align_t));
```

32 *Precondition:* `alignment` is a valid alignment. `size` must be an integral multiple of `alignment`.

33 Allocates `size` bytes of memory from the shared segment of the calling process, with alignment as specified by `alignment`. If the allocation succeeds, returns a pointer to the start of the allocated memory, and the allocated memory is uninitialized. If the allocation fails, returns a null pointer.

34 *UPC++ progress level:* none



```
35 template<typename T>  
global_ptr<T> allocate(size_t n = 1,  
                    size_t alignment = alignof(T));
```

36 *Precondition:* `alignment` is a valid alignment.

37 Allocates enough space for `n` objects of type `T` from the shared segment of the calling process, with the memory aligned as specified by `alignment`. If the allocation succeeds, returns a pointer to the start of the allocated memory, and the allocated memory is uninitialized. If the allocation fails, returns a null pointer.

38 *UPC++ progress level:* none

```
39 void deallocate(void* p);
```

40 *Precondition:* `p` must be either a null pointer or a non-deallocated pointer that resulted from a call to the first form of `allocate` on the calling process.

41 Deallocates the storage previously allocated by a call to `allocate`. Does nothing if `p` is a null pointer.

42 *UPC++ progress level:* none

```
43 template<typename T>  
void deallocate(global_ptr<T> g);
```

44 *Precondition:* `g` must be either a null pointer or a non-deallocated pointer that resulted from a call to `allocate<T, alignment>` on the calling process, for some value of `alignment`.

45 Deallocates the storage previously allocated by a call to `allocate`. Does nothing if `g` is a null pointer. Does not invoke the destructor for `T`.

46 *UPC++ progress level:* none

# Chapter 5

## Futures and Promises

### 5.1 Overview

- <sup>1</sup> In UPC++, the primary mechanisms by which a programmer interacts with non-blocking operations are futures and promises.<sup>1</sup> These two mechanisms, usually bound together under the umbrella concept of *futures*, are present in the C++11 standard. However, while we borrow some of the high-level concepts of C++'s futures, many of the semantics of `upcxx::future` and `upcxx::promise` differ from those of `std::future` and `std::promise`. In particular, while futures in C++ facilitate communicating between threads, the intent of UPC++ futures is solely to provide an interface for managing and composing non-blocking operations, and they cannot be used directly to communicate between threads or processes.
- <sup>2</sup> A non-blocking operation is associated with a state that encapsulates both the status of the operation as well as any result values. Each such operation has an associated *promise* object, which can either be explicitly created by the user or implicitly by the runtime when a non-blocking operation is invoked. A promise represents the producer side of the operation, and it is through the promise that the results of the operation are supplied and its dependencies fulfilled. A *future* is the interface through which the status of the operation can be queried and the results retrieved, and multiple future objects may be associated with the same promise. A future thus represents the consumer side of a non-blocking operation.

---

<sup>1</sup>Another mechanism, persona-targeted continuations, is discussed in §10.4.

## 5.2 The Basics of Asynchronous Communication

- <sup>1</sup> A programmer can invoke a non-blocking operation to be serviced by another process, such as a one-sided get operation (Ch. 8) or a remote procedure call (Ch. 9). Such an operation creates an implicit promise and returns an associated future object to the user. When the operation completes, the future becomes ready, and it can be used to access the results. The following demonstrates an example using a remote get (see Ch. 10 on how to make progress with UPC++):

```

1 global_ptr<double> ptr = /* obtain some remote pointer */;
2 future<double> fut = rget(ptr);           // initiate a remote get
3 // ...call into upcxx::progress() elided...
4 if (fut.ready()) {                       // check for readiness
5     double value = fut.result();         // retrieve result
6     std::cout << "got: " << value << '\n'; // use result
7 }

```

- <sup>2</sup> In general, a non-blocking operation will not complete immediately, so if a user needs to wait on the readiness of a future, they must do so in a loop. To facilitate this, we provide the `wait` member function, which waits on a future to complete while ensuring that sufficient progress (Ch. 10) is made on internal and user-level state:

```

1 global_ptr<double> ptr = /* obtain some remote pointer */;
2 future<double> fut = rget(ptr);           // initiate a remote get
3 double value = fut.wait();                // wait for completion and
4                                           // retrieve result
5 std::cout << "got: " << value << '\n';    // use result

```

- <sup>3</sup> An alternative to waiting for completion of a future is to attach a *callback* or *completion handler* to the future, to be executed when the future completes. This callback can be any function object, including lambda (anonymous) functions, that can be called on the results of the future, and is attached using `then`.

```

1 global_ptr<double> ptr = /* obtain some remote pointer */;
2 auto fut =
3 rget(ptr).then( // initiate a remote get and register a callback
4 // lambda callback function
5 [](double value) {
6     std::cout << "got: " << value << '\n'; // use result
7 }
8 );

```

- 4 The return value of `then` is another future representing the results of the callback, if any. This permits the specification of a sequence of operations, each of which depends on the results of the previous one.
- 5 A future can also represent the completion of a combination of several non-blocking operations. Unlike the standard C++ future, `upcxx::future` is a variadic template, encapsulating an arbitrary number of result values that can come from different operations. The following example constructs a future that represents the results of two existing futures:

```
1 future<double> fut1 = /* one future */;  
2 future<int> fut2 = /* another future */;  
3 future<double, int> combined = when_all(fut1, fut2);
```

- 6 Here, `combined` represents the state and results of two futures, and it will be ready when both `fut1` and `fut2` are ready. The results of `combined` are a `std::tuple` whose components are the results of the source futures.

## 5.3 Working with Promises

- 1 In addition to the implicit promises created by non-blocking operations, a user may explicitly create a promise object, obtain associated future objects, and then register non-blocking operations on the promise. This is useful in several cases, such as when a future is required before a non-blocking operation can be initiated, or where a single promise is used to count dependencies.
- 2 A promise can also be used to count *anonymous dependencies*, keeping track of operations that complete without producing a value. Upon creation, a promise has a dependency count of one, representing the unfulfilled results or, if there are none, an anonymous dependency. Further anonymous dependencies can then be registered on the promise. When registration is complete, the original dependency can then be fulfilled to signal the end of registration. The following example keeps track of several remote put operations with a single promise:

```
1 global_ptr<int> ptrs[10] = /* some remote pointers */;  
2 // create a promise with no results  
3 // the dependency count starts at one  
4 promise<> prom;  
5  
6 // do 10 puts, registering each of them on the promise  
7 for (int k = 0; k < 10; k++) {  
8     // rput implicitly registers itself on the given promise  
9     rput(k, ptrs[k], operation_cx::as_promise(prom));
```

```
10 }
11
12 // fulfill initial anonymous dependency, since registration is done
13 future<> fut = prom.finalize();
14
15 // wait for the rput operations to complete
16 fut.wait();
```

## 5.4 Advanced Callbacks

1 Polling for completion of a future allows simple overlap of communication and computation operations. However, it introduces the need for synchronization, and this requirement can diminish the benefits of overlap. To this end, many programs can benefit from the use of callbacks. Callbacks avoid the need for an explicit wait and enable reactive control flow: future completion triggers a callback. Callbacks allow operations to occur as soon as they are capable of executing, rather than artificially waiting for an unrelated operation to complete before being initiated.

2 Futures are the core abstraction for obtaining asynchronous results, and an API that supports asynchronous behavior can work with futures rather than values directly. Such an API can also work with immediately available values by having the caller wrap the values into a ready future using the `make_future` function template, as in this example that creates a future for an ordered pair of a `double` and an `int`:

```
1 void consume(future<int, double> fut);
2 consume(make_future(3, 4.1));
```

3 Given a future, we can attach a callback to be executed at some subsequent point when the future is ready using the `then` member function:

```
1 future<int, double> source = /* obtain a future */;
2 future<double> result = source.then(
3     [](int x, double y) {
4         return x + y;
5     }
6 );
```

4 In this example, `source` is a future representing an `int` and a `double` value. The argument of the call to `then` must be a function object that can be called on these values. Here, we use a lambda function that takes in an `int` and a `double`. The call to `then` returns a future that represents the result of calling the argument of `then` on the values contained

in `source`. Since the lambda function above returns a `double`, the result of `then` is a `future<double>` that will hold the double's value when it is ready.

- 5 In the example just shown, the result of `then()` is obtained by wrapping the return type inside a future. However, there is also another case, when the callback function returns a future rather than a non-future type (`double` in the previous example) In this case, the result of `then()` does not include the step of wrapping the return value in a future, since we are already returning a future. Thus, the result of the call to `then` has the same type as the return type of the callback. However, there is an important difference: the result is a future, which may or may not be ready. In the first case, it is the returned non-future value that may or may not be ready. This subtle difference, allows the UPC++ programmer to chain the results of one asynchronous operation into the inputs of the next, to arbitrary degree of nesting.

```
1 future<int, double> source = /* obtain a future */;
2 future<double> result = source.then(
3   [](int x, double y) {
4     // return a future<double> that is ready
5     return make_future(x + y);
6   }
7 );
8 // result may not be ready, since the callback will not be executed
9 // until source is ready
```

- 6 A callback may also initiate new asynchronous work and return a future representing the completion of that work:

```
1 global_ptr<int> remote_array = /* some remote array */;
2
3 // retrieve remote_array[0]
4 future<int> elt0 = rget(remote_array);
5
6 // retrieve remote_array[remote_array[0]]
7 future<int> elt_indirect = elt0.then(
8   [=](int index) {
9     return rget(remote_array + index);
10  }
11 );
```

- 7 The `then` member function is a combinator for constructing pipelines of transformations over futures. Given a future and a function that transforms that future's value into another value, `then` produces a future representing the transformed value. For example, we can transform, via a future, the value of `elt_indirect` above as follows:

```

1 future<int> elt_indirect_squared = elt_indirect.then(
2     [](int value) {
3         return value * value;
4     }
5 );

```

- 8 As the examples above demonstrate, the `then` member function allows a callback to depend on the result of another future. A more general pattern is for an operation to depend on the results of multiple futures. The `when_all` function template enables this by constructing a single future that combines the results of multiple futures. We can then register a callback on the combined future:

```

1 future<int> value1 = /* ... */;
2 future<double> value2 = /* ... */;
3
4 future<int, double> combined = when_all(value1, value2);
5 future<double> result = combined.then(
6     [](int x, double y) {
7         return x + y;
8     }
9 );

```

- 9 In the more general case, we may need to combine heterogeneous mixtures of future and non-future types. The `to_future` function template wraps a non-future value in a future while leaving future values unchanged. Thus, we can use `when_all` along with `to_future` to construct a single future that represents the combination of both future and non-future values:

```

1 future<int> value1 = /* ... */;
2 double      value2 = /* ... */;
3
4 future<int, double> combined = when_all(to_future(value1),
5                                         to_future(value2));
6 future<double> result = combined.then(
7     [](int x, double y) {
8         return x + y;
9     }
10 );

```

- 10 The results of a ready future can be obtained as a `std::tuple` using the `result_tuple` member function. Individual components can be retrieved by value with the `result` member function template. Unlike with `std::get`, it is not a compile-time error to use an invalid index with `result`; instead, the return type is `void` for an invalid index (other than

-1, which has special handling as described in the API reference below). This simplifies writing generic functions on futures, such as the following definition of `wait`:

```
1 template<typename ...T>
2 template<int I=-1>
3 auto future<T...>::wait() { // C++14-style decl for brevity
4     while (!ready()) {
5         progress();
6     }
7     return result<I>();
8 }
```

## 5.5 Execution Model

- 1 While some software frameworks provide thread-level parallelism by considering each callback to be a task that can be run in an arbitrary worker thread, this is not the case in UPC++. In order to maximize performance, our approach to futures is purposefully ambivalent to issues of concurrency. A UPC++ implementation is allowed to take action as if the current thread is the only one that needs to be accounted for. This restriction gives rise to a natural execution policy: callbacks registered against futures are always executed as soon as possible by the thread that discovers them. There are exactly two scenarios in which this may happen:
  1. When a promise is fulfilled.
  2. A callback is registered onto a ready future using the `then` member function.
- 2 Fulfilling a promise (via `fulfill_result`, `fulfill_anonymous` or `finalize`) is the only operation that can change an associated future from a non-ready to a ready state, enabling callbacks that depend on it to execute. Thus, promise fulfillment is an obvious place for discovering and executing such callbacks. Whenever a thread calls a fulfillment function on a promise, the user must anticipate that any newly available callbacks will be executed by the current thread before the fulfillment call returns.
- 3 The other place in which a callback will execute immediately is during the invocation of `then` on a future that is already in its ready state. In this case, the callback provided will fire immediately during the call to `then`.
- 4 There are some common programming contexts where it is not safe for a callback to execute during fulfillment of a promise. For example, it is generally unsafe to execute a callback that modifies a data structure while a thread is traversing the data structure. In such



a situation, it is the user's responsibility to ensure that a conflicting callback will not execute. One solution is create a promise that represents a thread reaching its *safe-to-execute* context, and then adding it to the dependency list of any conflicting callback.

```
1 future<int> value = /* ... */;
2 // create a promise representing a safe-to-execute state
3 // dependency count is initially 1
4 promise<> safe_state;
5 // create a future that depends on both value and safe_state
6 future<int> combined = when_all(value, safe_state.get_future());
7 auto fut = // register a callback on the combined future
8 combined.then(/* some callback that requires a safe state */);
9 // do some work, potentially fulfilling value's promise...
10 // signify a safe state
11 safe_state.finalize();
12 // callback can now execute
```

- 5 As demonstrated above, the user can wait to fulfill the promise until it is safe to execute the callback, which will then allow it to execute.

## 5.6 Fulfilling Promises

- 1 As demonstrated previously, promises can be used to both supply values as well as signal completion of events that do not produce a value. As such, a promise is a unified abstraction for tracking the completion of asynchronous operations, whether the operations produce a value or not. A promise represents at most one dependency that produces a value, but it can track any number of anonymous dependencies that do not result in a value.
- 2 When created, a promise starts with an initial dependency count of 1. For an empty promise (`promise<>`), this is necessarily an anonymous dependency, since an empty promise does not hold a value. For a non-empty promise, the initial count represents the sole dependency that produces a value. Further anonymous dependencies can be explicitly registered on a promise with the `require_anonymous` member function:

```
1 promise<int, double> pro; // initial dependency count is 1
2 pro.require_anonymous(10); // dependency count is now 11
```

- 3 The argument to `require_anonymous` must be nonnegative and the promise's current dependency count must be greater than zero, so that a call to `require_anonymous` never causes the dependency count to reach zero, which would put the promise in the fulfilled

state. In the example above, the argument must be greater than -1, and the given argument of 10 is valid.

- 4 Anonymous dependencies can be fulfilled by calling the `fulfill_anonymous` member function:

```
1 for (int k = 0; k < 5; i++) {
2   pro.fulfill_anonymous(k);
3 } // dependency count is now 1
```

- 5 A non-anonymous dependency is fulfilled by calling `fulfill_result` with the produced values:

```
1 pro.fulfill_result(3, 4.1); // dependency count is now 0
2 assert(pro.get_future().ready());
```

- 6 Both empty and non-empty promises can be used to track anonymous dependencies. A UPC++ operation that operates on a promise *always* increments its dependency count upon invocation, as if by calling `require_anonymous(1)` on the promise. After the operation completes<sup>2</sup>, if the completion produces values of type `T...`, then the values are supplied to the promise through a call to `fulfill_result`. Otherwise, the completion is signaled by fulfilling an anonymous dependency through a call to `fulfill_anonymous(1)`.

- 7 The rationale for this behavior is to free the user from having to manually increment the dependency count before calling an operation on a promise; instead, UPC++ will implicitly perform this increment. This leads to the pattern, shown at the beginning of this chapter, of registering operations on a promise and then finalizing the promise to take it out of registration mode:

```
1 global_ptr<int> ptrs[10] = /* some remote pointers */;
2 promise<> prom; // dependency count is 1
3
4 for (int i = 0; i < 10; i++) {
5   rput(i, ptrs[i],
6       operation_cx::as_promise(prom)); // increment count
7 } // dependency count is now 11
8
9 future<> fut = prom.finalize(); // decrement count, making it 10
10
11 // wait for the 10 rput operations to complete
12 fut.wait();
```

---

<sup>2</sup>The notification will occur during user-level progress of the persona that initiates the operation. See Ch. 10 for more details.

- <sup>8</sup> A user familiar with UPC++ V0.1 will observe that empty promises subsume the capabilities of `events` in UPC++ V0.1. In addition, they can take part in all the machinery of promises, futures, and callbacks, providing a much richer set of capabilities than were available in V0.1.

## 5.7 Lifetime and Thread Safety

- <sup>1</sup> Understanding the lifetime of objects in the presence of asynchronous control flow can be tricky. Objects must outlive the last callback that references them, which in general does not follow the scoped lifetimes of the call stack. For this reason, UPC++ automatically manages the state represented by futures and promises, and the state persists for as long as there is a future, promise, or dependent callback that references it. Thus, a user can construct intricate webs of callbacks over futures without worrying about explicitly managing the state representing the callbacks' dependencies or results.
- <sup>2</sup> Though UPC++ does not prescribe a specific management strategy, the semantics of futures and promises are analogous to those of standard C++11 smart pointers. As with `std::shared_ptr`, a future may be freely copied, and both the original and the copy represent the same state and are associated with the same promise. Thus, if one copy of a future becomes ready, then so will the other copies. On the other hand, a promise can be mutated by the user through its member functions, so allowing a promise to be copied would introduce the issue of aliasing. Instead, we adopt the same non-copyable, yet movable, semantics for a promise as `std::unique_ptr`.
- <sup>3</sup> Given that UPC++ futures and promises are already thread-unaware to allow the execution strategy to be straightforward and efficient, UPC++ also makes no thread safety guarantees about internal state management. This enables creation of copies of a future to be a very cheap operation. For example, a future can be captured by value by a lambda function or passed by value without any performance penalties. On the other hand, the lack of thread safety means that sharing a future between threads must be handled with great caution. Even a simple operation such as making a copy of a future, as when passing it by value to a function, is unsafe if another thread is concurrently accessing an identical future, since the act of copying it can modify the internal management state. Thus, a mutex or other synchronization is required to ensure exclusive access to a future when performing any operation on it.
- <sup>4</sup> Fulfilling a promise gives rise to an even more stringent demand, since it can set off a cascade of callback execution. Before fulfilling a promise, the user must ensure that the thread has the exclusive right to mutate not just the future associated with the promise, but all other futures that are directly or indirectly dependent on fulfillment of the promise.

Thus, when crafting their code, the user must properly manage exclusivity for *islands* of disjoint futures. We say that two futures are in *disjoint islands* if there is no dependency, direct or indirect, between them.

- 5 A reader having previous experience with futures will note that UPC++’s formulation is a significant departure from many other software packages. Futures are commonly used to pass data between threads, like a channel that a producing thread can supply a value into, notifying a consuming thread of its availability. UPC++, however, is intended for high-performance computing, and supporting concurrently shareable futures would require synchronization that would significantly degrade performance. As such, futures in UPC++ are not intended to *directly* facilitate communication between threads. Rather, they are designed for a single thread to manage the non-determinism of reacting to the events delivered by concurrently executing agents, be they other threads or the network hardware.

## 5.8 API Reference

- 1 *UPC++ progress level for all functions in this chapter (unless otherwise noted) is: none*

### 5.8.1 future

```
1 template<typename ...T>  
  class future;
```

2 *C++ Concepts: DefaultConstructible, CopyConstructible, CopyAssignable, De-*  
 *structible*

3 The types in T... must not be void.

```
4 template<typename ...T>  
  future<T...>::future();
```

5 Constructs a future that will never become ready.

6 *This function may be called when UPC++ is in the uninitialized state.*

```
7 template<typename ...T>  
  future<T...>::~~future();
```

8 Destructs this future object.

9 *This function may be called when UPC++ is in the uninitialized state.*

```
10 template<typename ...T>  
future<T...> make_future(T ...results);
```

11 Constructs a trivially ready future from the given values.

```
12 template<typename ...T>  
bool future<T...>::ready() const;
```

13 Returns true if the future's result values have been supplied to it.

```
14 template<typename ...T>  
std::tuple<T...> future<T...>::result_tuple() const;
```

15 *Precondition:* `this->ready()`

16 Retrieves the tuple of result values for this future.

```
17 template<typename ...T>  
template<int I=-1>  
future_element_t<I, future<T...>>  
future<T...>::result() const;
```

18 *Precondition:* `this->ready()`

19 If `I` is in the range `[0, sizeof...(T))`, retrieves the  $I^{\text{th}}$  component from the future's results tuple. The return type is `U`, where `U` is the  $I^{\text{th}}$  component of `T`.

20 If `I` is `-1`, returns the following:

- 21 ● `void` if `T` is empty
- 22 ● if `T` has one element, the single component of the future's results tuple; the return type is `T`
- 23 ● if `T` has multiple elements, the tuple of result values for the future; the return type is `std::tuple<T...>`

24 The return type is `void` if `I` is outside the range `[-1, sizeof...(T))`.

```
25 template<typename ...T>
    template<typename Func>
    future_invoke_result_t<Func, T...>
        future<T...>::then(Func func);
```

26 *Precondition:* The call `func()` must not throw an exception.

27 Returns a new future representing the return value of the given function object `func` when invoked on the results of this future as its argument list. If `func` returns a future, then the result of `then` will be a semantically equivalent future, except that it will be in a non-ready state before `func` executes. If `func` does not return a future, then the return value of `then` is a future that encapsulates the result of `func`, and this future will also be in a non-ready state before `func` executes. If the return type of `func` is `void`, then the return type of `then` is `future<>`.

28 The function object will be invoked in one of two situations:

- 29 • Immediately before `then` returns if this future is in the ready state.
- 30 • During a promise fulfillment which would directly or indirectly make this future transition to the ready state.

```
31 template<typename ...T>
    std::tuple<T...> future<T...>::wait_tuple();
```

32 Blocks until the future is ready, while making UPC++ user-level progress. See Ch. 10 for a discussion of progress. The return value is the same as that produced by calling `result_tuple()` on the future.

33 *This function may not be invoked from the restricted context (§10.2).*

34 *UPC++ progress level: user*

```
35 template<typename ...T>
    template<int I=-1>
    future_element_t<I, future <T...>>
        future<T...>::wait();
```

36 Blocks until the future is ready, while making UPC++ user-level progress. See Ch. 10 for a discussion of progress. The return value is the same as that produced by calling `result()` on the future.

37 *This function may not be invoked from the restricted context (§10.2).*

38 *UPC++ progress level: user*

```
39 template<typename ...Futures>  
    future<CTypes...> when_all(Futures ...fs);
```

40 Given a variadic list of futures as arguments, constructs a future representing the readiness of all arguments. The results tuple of this future will be the concatenated results tuples of the arguments. The type parameters of the returned object (`CTypes...`) is the ordered concatenation of the type parameter lists of the types in `Futures...`. If `Futures...` is empty, then the result is a trivially ready `future<>`.

```
41 template<typename T>  
    future<CTypes...> to_future(T future_or_value);
```

42 Constructs a future that encapsulates the value represented by `future_or_value`. If `T` is of type `future<U...>`, then `CTypes...` is the same as `U...`, and the returned future is a copy of `future_or_value`. If `T` is not a future, then `CTypes...` is `T`, and the function returns a ready future whose encapsulated value is `future_or_value`.

## 5.8.2 promise

```
1 template<typename ...T>  
    class promise;
```

2 *C++ Concepts:* DefaultConstructible, MoveConstructible, MoveAssignable, Destructible

3 The types in `T...` must not be `void`.

```
4 template<typename ...T>  
    promise<T...>::promise(std::intptr_t dependency_count=1);
```

5 *Precondition:* `dependency_count >= 1`

6 Constructs a promise with its results uninitialized and the given initial dependency count.

7 *This function may be called when UPC++ is in the uninitialized state.*

```
8 template<typename ...T>  
  promise<T...>::~~promise();
```

9       Destroys this promise object.

10       *This function may be called when UPC++ is in the uninitialized state.*

```
11 template<typename ...T>  
  void promise<T...>::require_anonymous(std::intptr_t count);
```

12       *Precondition:* `count` is nonnegative. The dependency count of this promise is greater than 0.

          Adds `count` to this promise's dependency count.

```
13 template<typename ...T>  
  template<typename ...U>  
  void promise<T...>::fulfill_result(U &&...results);
```

14       *Precondition:* `fulfill_result` has not been called on this promise before, and the dependency count of this promise is greater than zero.

15       Initializes the promise's result tuple with the given values and decrements the dependency counter by 1. Requires that `T` and `U` have the same number of components, and that each component of `U` is implicitly convertible to the corresponding component of `T`. If the dependency counter reaches zero as a result of this call, the associated future is set to ready, and callbacks that are waiting on the future are executed on the calling thread before this function returns.

```
16 template<typename ...T>  
  void promise<T...>::fulfill_anonymous(std::intptr_t count);
```

17       *Precondition:* `count` is nonnegative. The dependency count of this promise is greater than zero and greater than or equal to `count`. If the dependency count is equal to `count` and `T` is not empty, then the results of this promise must have been previously supplied by a call to `fulfill_result`.

18       Subtracts `count` from the dependency counter. If this produces a zero counter value, the associated future is set to ready, and callbacks that are waiting on the future are executed on the calling thread before this function returns.



```
19 template<typename ...T>  
future<T...> promise<T...>::get_future() const;
```

20 Returns the future representing this promise being fulfilled. Repeated calls to `get_future` return equivalent futures with the guarantee that no additional memory allocation is performed.

```
21 template<typename ...T>  
future<T...> promise<T...>::finalize();
```

22 Equivalent to calling `this->fulfill_anonymous(1)` and then returning the result of `this->get_future()`.

# Chapter 6

## Serialization

- <sup>1</sup> As a communication library, `UPC++` needs to send C++ types between processes that might be separated by a network interface. The underlying GASNet networking interface sends and receives bytes, thus, `UPC++` needs to be able to convert C++ types to and from bytes.

### 6.1 Class Serialization Interface

- <sup>1</sup> For standard `TriviallyCopyable` data types, `UPC++` can serialize and deserialize these objects for the user without extra intervention on their part. For user data types that have more involved serialization requirements, the user needs to take two steps to inform `UPC++` about how to serialize the object.
  1. Declare their type to be a friend of `access`
  2. Implement the visitor function `serialize`
- <sup>2</sup> The type must also satisfy the C++ `CopyConstructible` concept.
- <sup>3</sup> Figure 6.1 provides an example of this process. The definition of the `&` operator for the `Archive` class depends on whether `UPC++` is serializing or deserializing an object instance.
- <sup>4</sup> `UPC++` provides implementations of `operator&` for the C++ built-in types. `UPC++` serialization is compatible with a subset of the `Boost` serialization interface. This does not imply that `UPC++` includes or requires `Boost` as a dependency. The reference implementation of `UPC++` does neither of these, it comes with its own implementation of serialization that simply adheres to the interface set by `Boost`. It is acceptable to have

```
1 class UserType {
2     // The user's fields and member declarations as usual.
3     int member1, member2;
4     // ...
5
6     // To enable the serializer to visit the member fields,
7     // the user provides this...
8     friend class upcxx::access;
9
10    // ...and this
11    template<typename Archive>
12    void serialize(Archive &ar, unsigned) {
13        ar & this->member1;
14        ar & this->member2;
15        // ...
16    }
17 };
```

Figure 6.1: An example of using `access` in a user-defined class

`friend boost::serialization::access` in place of `friend upcxx::access`. UPC++ will use your Boost serialization in that case.

<sup>5</sup> There are restrictions on which actions serialization/deserialization routines may perform. They are:

1. Serialization/deserialization may not call any UPC++ routine with a progress level other than `none`.
2. UPC++ must perceive these routines as referentially transparent. Loosely, this means that the routines should be “pure” functions between the native representation and a flat sequence of bytes.
3. The routines must be thread-safe and permit concurrent invocation from multiple threads, even when serializing the same object.

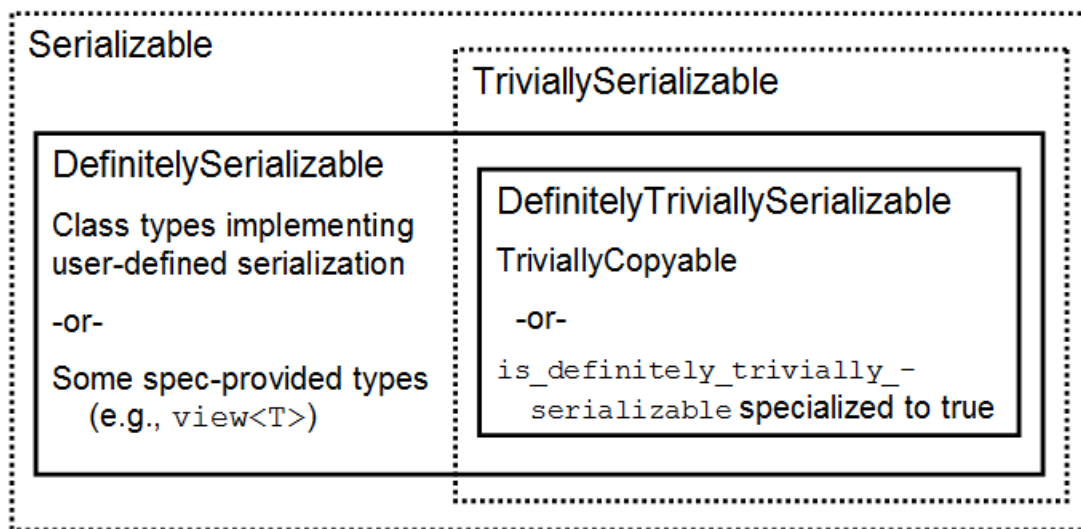


Figure 6.2: Serializable UPC++ concepts type hierarchy. UPC++ concepts with a corresponding trait query are indicated with a solid line.

## 6.2 Serialization Concepts

- 1 UPC++ defines the concepts *DefinitelyTriviallySerializable*, *TriviallySerializable*, *DefinitelySerializable*, and *Serializable* that describe what form of serialization a C++ type supports. Figure 6.2 helps summarize the relationship of these concepts.
- 2 A type T is *DefinitelyTriviallySerializable* if either of the following holds:
  - 3 • T is *TriviallyCopyable* (i.e. `std::is_trivially_copyable<T>::value` is true), and if T is of class type, T does not implement the UPC++ serialization interface described above
  - 4 • `upcxx::is_definitely_trivially_serializable<T>` is specialized to provide a member constant value that is true
- 5 In the latter case, UPC++ treats the type T as if it were *TriviallyCopyable* for the purposes of serialization. Thus, UPC++ will serialize an object of type T by making a byte copy, and it will assume T is *TriviallyDestructible* when destroying a deserialized object of type T.
- 6 A type T is *TriviallySerializable* if it is semantically valid to copy an object by copying its underlying bytes, and UPC++ serializes such types by making a byte copy. A type T that is *DefinitelyTriviallySerializable* is also *TriviallySerializable*.
- 7 A type T is *DefinitelySerializable* if one of the following holds:

- 8     • T is `DefinitelyTriviallySerializable`
  - 9     • T is of class type and implements the UPC++ serialization interface
  - 10    • T is explicitly described as `DefinitelySerializable` by this specification
- 11 A type T is `Serializable` if it is either `TriviallySerializable` or `DefinitelySerializable`.
- 12 The type trait `upcxx::is_definitely_trivially_serializable<T>` provides a member constant `value` that is `true` if T is `DefinitelyTriviallySerializable` and `false` otherwise. This trait may be specialized for user types (types that are not defined by the C++ or UPC++ standards).
- 13 The type trait `upcxx::is_definitely_serializable<T>` provides a member constant `value` that is `true` if T is `DefinitelySerializable` and `false` otherwise. This trait may not be specialized by the user for any types.
- 14 The set of standard-library container types that are `DefinitelySerializable` is implementation-defined. If an implementation defines a container type T to be `DefinitelySerializable`, then `upcxx::is_definitely_serializable<T>::value` must be `true`.
- 15 Several UPC++ communication operations require that the objects to be transferred are of `DefinitelyTriviallySerializable` type. The C++ standard allows implementations to determine whether or not lambda functions are `TriviallyCopyable`, so whether or not such objects are `DefinitelyTriviallySerializable` is implementation-dependent.
- 16 Serializability of a type T does not imply that objects of type T are meaningful on another process. In particular, C++ pointer-to-object and pointer-to-function types are `DefinitelyTriviallySerializable`, but it is generally invalid to dereference a local pointer that originated from another process. More generally, objects that represent local resources are usually not meaningful on other processes, whether their types are `Serializable` or not.

## 6.3 Functions

- 1 In Chapter 7 (*Completion*) and Chapter 9 (*Remote Procedure Calls*) there are several cases where a C++ *FunctionObject* is expected to execute on a destination process. In these cases the function arguments are serialized as described in this chapter. The *FunctionObject* itself (i.e. the `func` argument to `rpc`, `rpc_ff`, or `as_rpc`) is converted to a function pointer offset from a known *sentinel* in the source program's *code segment*. The details of the implementation are not described here but typical allowed *FunctionObjects* are
- 2     • C functions

- 3     • C++ global and file-scope functions
- 4     • Class static functions
- 5     • lambda functions

## 6.4 Special Handling in Remote Procedure Calls

- 1 Remote procedure calls, whether standalone (§9) or completion based (§7), perform special handling on certain non-DefinitelySerializable UPC++ data structures. Arguments that are either a reference to `dist_object` type (see §14 Distributed Objects) or a `team` (see §11 Teams) are transferred by their `dist_id` or `team_id` respectively. Execution of the RPC is deferred until all of the id's have a corresponding instance constructed on the recipient. When that occurs, `func` is enlisted for execution during user-level progress of the recipient's master persona (see §10 Progress), and it will be called with the recipient's instance references in place of those supplied at the send site. The behavior is undefined if the recipient's instance of a `dist_object` or `team` argument is destroyed before the RPC executes.

## 6.5 View-Based Serialization

- 1 UPC++ also provides a mechanism for serializing the elements of a sequence. The following is an example of transferring a sequence with `rpc`:

```
1 std::list<double> items = /* fill with elements */;
2 auto fut = rpc_ff(1, [] (view<double> packedlist) {
3     // target side gets object containing iterators
4     for (double elem : packedlist) { // traverse network buffer
5         process(elem); // process each element
6     }
7 }, make_view(items.begin(), items.end()));
```

- 2 In this example, a `std::list<double>` contains the elements to be transferred. Calling `make_view` on its begin and end iterators results in a `view`, which can then be passed to a remote procedure call. The elements in the sequence are serialized and transferred as part of the RPC, and the target receives a `view` over the elements stored in the network buffer. The RPC can then iterate over `view` to obtain each element.

- <sup>3</sup> There is an asymmetry in the `view` types at the initiator and target of an RPC, reflecting the difference in how the underlying sequences are stored in memory. In the example above, the type of the value returned by `make_view` is `view<double, std::list<double>::iterator>`, since the initiator supplies iterators associated with a list. The target of the RPC, however, receives a `view<double, view_default_iterator_t<double>>`, with the `view_default_iterator_t<T>` type representing an iterator over a network buffer. The latter is the default argument for the second template parameter of `view`, so that a user can specify `view<T>` rather than `view<T, view_default_iterator_t<T>>`.
- <sup>4</sup> UPC++ provides different handling of `view<T>` based on whether the element type `T` is `DefinitelyTriviallySerializable` or not. For `DefinitelyTriviallySerializable` element type, deserialization is a no-op, and the `view<T>` on the recipient is a direct view over a network buffer, providing both random access and access to the buffer itself. The corresponding `view_default_iterator_t<T>` is an alias for `T*`. On the other hand, if the `view` element type is not `DefinitelyTriviallySerializable`, then an element must be nontrivially deserialized before it can be accessed by the user. In such a case, the `view<T>` only provides access through an `InputIterator`, which deserializes and returns elements by value, and `view_default_iterator_t<T>` is an alias for `deserializing_iterator<T>`.
- <sup>5</sup> As a non-owning interface, `view` only provides `const` access to the elements in the underlying sequence, analogous to C++17 `string_view`. However, in the case of a `view<T>` that is received by the target of an RPC, where `T` is `DefinitelyTriviallySerializable`, the underlying elements are stored directly in a network buffer as indicated above. There is no external owning container, so UPC++ permits a user to perform a `const_cast` conversion on an element and modify it.
- <sup>6</sup> The lifetime of the underlying data buffer and all view iterators on the target in both the `DefinitelyTriviallySerializable` and non-`DefinitelyTriviallySerializable` cases is restricted by default to the duration of the RPC. In this case, the elements must be processed or copied elsewhere before the RPC returns. However, if the RPC returns a future, then the lifetime of the buffer and view iterators is extended until that future is readied. This allows an RPC to initiate an asynchronous operation to consume the elements, and as long as the resulting future is returned from the RPC, the underlying buffer will remain alive until the asynchronous operation is complete and the future readied. Lifetime extension applies to all RPC variants, including `rpc_ff` and `as_rpc` where the return value is not made available to user code.
- <sup>7</sup> While UPC++ manages the lifetime of the data underlying a `view` when it is an argument to an RPC, the library does not support a `view` as the return type of an RPC due to the lifetime issues it raises. Thus, an RPC is prohibited from returning a `view` even though it is classified as `DefinitelySerializable`.

- 8 The behavior is unspecified when a `view<T, IterType>` is passed to `rpc`, `rpc_ff`, or `as_rpc` if the type `T` is itself a view.

## 6.6 API Reference

```
1 template<typename T>
  struct is_definitely_trivially_serializable;
```

- 2 Provides a member constant value that is `true` if `T` is `DefinitelyTriviallySerializable` and `false` otherwise. This trait may be specialized for user types.

```
3 template<typename T>
  struct is_definitely_serializable;
```

- 4 Provides a member constant value that is `true` if `T` is `DefinitelySerializable` and `false` otherwise. This trait may not be specialized. However, its value may be indirectly influenced by specializing `is_definitely_trivially_serializable<T>` or implementing the class serialization interface for `T`, as appropriate.

```
5 template<typename T>
  class deserializing_iterator {
public:
  // types
  using iterator_category = std::input_iterator_tag;
  using value_type        = T;
  using difference_type   = std::ptrdiff_t;
  using pointer           = T*;
  using reference         = T;

  deserializing_iterator();

  // accessors
  T operator*() const;

  // increment
  deserializing_iterator& operator++();
  deserializing_iterator operator++(int);
};

// comparisons
```



```

template<typename T>
bool operator==(const deserializing_iterator& x,
                const deserializing_iterator& y);
template<typename T>
bool operator!=(const deserializing_iterator& x,
                const deserializing_iterator& y);

```

6      *C++ Concepts: InputIterator*

7      An iterator over elements stored in a network buffer. Dereferencing the iterator causes the element to be deserialized and returned by value (i.e. `deserializing_iterator<T>::reference` is an alias for `T`).

8      While this iterator is classified as an `InputIterator`, it does not support `operator->`, as the underlying element must be materialized on demand and its lifetime would not extend beyond the application of the operator.

9      *UPC++ progress level for all functions above: none*

```

10  template<typename T>
    using view_default_iterator_t = /* ... */;

```

11     A type alias that is equivalent to `T*` if `T` is `DefinitelyTriviallySerializable` (i.e. `upcxx::is_definitely_trivially_serializable<T>::value` is true), and `deserializing_iterator<T>` otherwise.

```

12  template<typename T,
        typename IterType = view_default_iterator_t<T>>
class view {
public:
    // types
    using iterator = IterType;
    using size_type = std::size_t;

    // iterators
    iterator begin();
    iterator end();

    // capacity
    size_type size() const;
};

```

13 *C++ Concepts*: DefaultConstructible, CopyConstructible, CopyAssignable, Destructible

14 *UPC++ Concepts*: DefinitelySerializable

15 A class template representing a view over an underlying sequence of elements of type T, delimited by `begin()` and `end()`.

16 *UPC++ progress level for all member functions of view*: none

```
17 template<typename T>
class view<T, T*> {
public:
    // types
    using value_type           = T;
    using pointer              = T*;
    using const_pointer        = const T*;
    using reference            = T&;
    using const_reference      = const T&;
    using const_iterator       = const T*;
    using iterator             = const_iterator;
    using const_reverse_iterator =
        std::reverse_iterator<const_iterator>;
    using reverse_iterator     = const_reverse_iterator;
    using size_type            = std::size_t;
    using difference_type      = std::ptrdiff_t;

    // no explicit construct/copy/destroy for non-owning type

    // iterators
    const_iterator          begin() const;
    const_iterator          cbegin() const;

    const_iterator          end() const;
    const_iterator          cend() const;

    const_reverse_iterator  rbegin() const;
    const_reverse_iterator  crbegin() const;

    const_reverse_iterator  rend() const;
    const_reverse_iterator  crend() const;

    // capacity
    bool empty() const;
```

```

size_type size() const;

// element access
const_reference operator [] (size_type n) const;
const_reference at (size_type n) const;
const_reference front() const;
const_reference back() const;

const_pointer data() const;
};

```

18 *C++ Concepts:* DefaultConstructible, CopyConstructible, CopyAssignable, Destructible

19 *UPC++ Concepts:* DefinitelySerializable

20 A template specialization representing a view over a network buffer of elements of type T, delimited by `begin()` and `end()`.

21 *Exceptions:* `at(n)` throws `std::out_of_range` if `n` is not in the range `[0, size())`.

22 *UPC++ progress level for all member functions of `view`:* none

```

23 template<typename T, typename IterType>
view<T, IterType>::view();

```

24 *Precondition:* `IterType` must satisfy the ForwardIterator C++ concept. The type `std::iterator_traits<IterType>::value_type` must be the same as T. T must be DefinitelySerializable.

25 Initializes this view to represent an empty sequence.

```

26 template<typename IterType>
view<typename std::iterator_traits<IterType>::value_type, IterType>
make_view(IterType begin, IterType end,
          typename std::iterator_traits<IterType>::difference_type
          size = std::distance(begin, end));

```

27 *Precondition:* `IterType` must satisfy the ForwardIterator C++ concept. The underlying element type (`std::iterator_traits<IterType>::value_type`) must be DefinitelySerializable. `size` must be equal to the number of elements in `[begin, end)`.

28 Constructs a view over the sequence delimited by `begin` and `end`.

29        *UPC++ progress level: none*

```
30 template<typename Container>  
  view<typename Container::value_type,  
      typename Container::const_iterator>  
  make_view(const Container &container);
```

31        *Precondition:* **Container** must satisfy the Container C++ concept. The underlying element type (**Container::value\_type**) must be DefinitelySerializable.

32        Constructs a **view** over the sequence delimited by **container.cbegin()** and **container.cend()**.

33        *UPC++ progress level: none*

# Chapter 7

## Completion

### 7.1 Overview

- <sup>1</sup> Data movement operations come with the concept of completion, meaning that the effect of the operation is now visible on the source or target process and that resources, such as memory on the source and destination sides, are no longer in use by UPC++. A single UPC++ call may have several completion events associated with it, indicating completion of different stages of a communication operation. These events are categorized as follows:
- <sup>2</sup>     • *Source completion*: The source-side resources of a communication operation are no longer in use by UPC++, and the application is now permitted to modify or reclaim them.
  - <sup>3</sup>     • *Remote completion*: The data have been deposited on the remote target process, and they can be consumed by the target.
  - <sup>4</sup>     • *Operation completion*: The operation is complete from the viewpoint of the initiator. The transferred data can now be read by the initiator, resulting in the values that were written to the target locations.
- <sup>5</sup> A completion event may be associated with some values produced by the communication operation, or it may merely signal completion of an action. Each communication operation specifies the set of completion events it provides, as well as the values that a completion event produces. Unless otherwise indicated, a completion event does not produce a value.
- <sup>6</sup> UPC++ provides several alternatives for how completion can be signaled to the program:

- 7     • *Future*: The communication call returns a future, which will be readied when the completion event occurs. This is the default notification mode for communication operations. If the completion event is associated with some values of type `T...`, then the returned future will have type `future<T...>`. If no value is associated with the completion, then the future will have type `future<>`.
- 8     • *Promise*: The user provides a promise when requesting notification of a completion event, and that promise will have one its dependencies fulfilled when the event occurs. The promise must have a non-zero dependency count. If the completion event is associated with some values of type `T...`, then it must be valid to call `fulfill_result()` on the promise with values of type `T...`, and the promise must not have had `fulfill_result()` called on it. The promise will then have `fulfill_result()` called on it with the associated values when the completion event occurs. If no value is associated with the completion, then the promise may have any type. It will have an anonymous dependency fulfilled upon the completion event.
- 9     • *Local-Procedure Call (LPC)*: The user provides a target persona and a callback function object when requesting notification of a completion event. If the completion is associated with some values of type `T...`, then the callback must be invocable with arguments of type `T...`. Otherwise, it must be invocable with no arguments. The callback, together with the associated completion values if any, is enlisted for execution on the given persona when the completion event occurs.
- 10    • *Remote-Procedure Call (RPC)*: The user provides a Serializable function object when requesting notification of a completion event, as well as the arguments on which the function object should be invoked. Each argument must either be DefinitelySerializable, a `dist_object<T>&`, or `team&`. The function object and arguments are transferred as part of the communication operation, and the invocation is enlisted for execution on the master persona of the target process when the completion event occurs.
- 11    • *Buffered*: The communication call consumes the source-side resources of the operation before the call returns, allowing the application to immediately modify or reclaim them. This delays the return of the call until after the source-completion event. The implementation may internally buffer the source-side resources or block until network resources are available to inject the data directly.
- 12    • *Blocking*: This is similar to buffered completion, except that the implementation is required to block until network resources are available to inject the data directly.
- 13    Future, promise, and LPC completions are only valid for completion events that occur at the initiator of a communication call, namely source and operation completion. RPC completion is only valid for a completion event that occurs at the target of a communication

operation, namely remote completion. Buffered and blocking completion are only valid for source completion. More details on futures and promises are in Ch. 5, while LPC and RPC callbacks are discussed in Ch. 10.

- 14 Notification of completion only happens during user-level progress of the initiator or target process. Even if an operation completes early, including before the initiation operation returns, the application cannot learn this fact without entering user progress. For futures and promises, only when the initiating thread (persona actually) enters user-level progress will the future or promise be eligible for taking on a readied or fulfilled state. LPC callbacks will execute once a thread enters user progress of the designated persona. See Ch. 10 for the full discussion on user progress and personas.
- 15 If buffered or blocking completion is requested, then the source-completion event occurs before the communication call returns. However, source-completion notifications, such as triggering a future or executing an LPC, are still delayed until the next user-level progress. Similarly, source-completion notifications for empty data transfers (e.g. `rput` with a size of zero) are delayed until the next user-level progress.
- 16 Operation completion implies both source and remote completion. However, it does not imply that the actions associated with source and remote completion have been executed.

## 7.2 Completion Objects

<sup>1</sup> The UPC++ mechanism for requesting notification of completion is through opaque *completion objects*, which associate notification actions with completion events. Completion objects are CopyConstructible, CopyAssignable, and Destructible, and the same completion object may be passed to multiple communication calls. A simple completion object is constructed by a call to a static member function of the `source_cx`, `remote_cx`, or `operation_cx` class, providing notification for the corresponding event. The member functions `as_future`, `as_promise`, `as_lpc`, and `as_rpc` request notification through a future, promise, LPC, or RPC, respectively. Only the member functions that correspond to valid means of signaling notification of an event are defined in the class associated with that event.

<sup>2</sup> The following is an example of a simple completion object:

```
1 global_ptr<int> gp1 = /* some global pointer */;
2 promise<int> pro1;
3 auto cxs = operation_cx::as_promise(pro1);
4 rget(gp1, cxs);
5 pro1.finalize(); // fulfill the initial anonymous dependency
```

- 3 The `rget` function, when provided just a `global_ptr<int>`, transfers a single `int` from the given location to the initiator. Thus, operation completion is associated with an `int` value, and the promise used for signaling that event must have type compatible with an `int` value, e.g. `promise<int>`. The user constructs a completion object that requests operation notification on the promise `pro1` by calling `operation_cx::as_promise(pro1)`. Since a completion object is opaque, the `auto` keyword is used to deduce the type of the completion object. The resulting completion object can then be passed to `rget`, which fulfills the promise with the transferred value upon operation completion.
- 4 A user can request notification of multiple completion events, as well as multiple notifications of a single completion event. The pipe (`|`) operator can be used to combine completion objects to construct a union of the operands. The following is an example:

```
1 int foo() {
2     return 0;
3 }
4
5 int bar(int x) {
6     return x;
7 }
8
9 void do_comm(double *src, size_t count) {
10    global_ptr<double> dest = /* some global pointer */;
11    promise<> pro1;
12    persona &per1 = /* some persona */;
13    auto cxs = (operation_cx::as_promise(pro1) |
14               source_cx::as_future() |
15               operation_cx::as_future() |
16               operation_cx::as_future() |
17               source_cx::as_lpc(per1, foo) |
18               remote_cx::as_rpc(bar, 3)
19               );
20    std::tuple<future<>, future<>, future<>> result =
21        rput(src, dest, count, cxs);
22    pro1.finalize().wait(); // finalize promise, wait on its future
23 }
```

- 5 This code initiates an `rput` operation, which provides source-, remote-, and operation-completion events. A unified completion object is constructed by applying the pipe operator to individual completion objects. When `rput` is invoked with the resulting unified completion object, it returns a tuple of futures corresponding to the individual future completions requested. The ordering of futures in this tuple matches the order of application



of the pipe operator (this operator is associative but not commutative). In the example above, the first future in the tuple would correspond to source completion, and the second and third would be for operation completion. If no future-based notification is requested, then the return type of the communication call would be `void` rather than a tuple.

- <sup>6</sup> When multiple notifications are requested for a single event, the order in which those notifications occur is unspecified. In the code above, the order in which `pro1` is fulfilled and the two futures for operation completion are readied is indeterminate. Similarly, if both source and operation completion occur before the next user-level progress, the order in which the notifications occur is unspecified, so that operation-completion requests may be notified before source-completion requests.
- <sup>7</sup> Unlike a direct call to the `rpc` function (Ch. 9), but like a call to `rpc_ff`, an RPC completion callback does not return a result to the initiator. Thus, the value returned by the RPC invocation of `bar` above is discarded.
- <sup>8</sup> Arguments to `remote_cx::as_rpc` are serialized at an unspecified time between the invocation of `as_rpc` and the source completion event of a communication operation that accepts the resulting completion object. If multiple communication operations use a single completion object resulting from `as_rpc`, then the arguments may be serialized multiple times. For arguments that are not passed by value, the user must ensure that they remain valid until source completion of all communication operations that use the associated completion object.

### 7.2.1 Restrictions

- <sup>1</sup> The API reference for a UPC++ call that supports the completion interface lists the completion events that the call provides, as well as the types of values associated with each event, if any. The result is undefined if a completion object is passed to a call and the object contains a request for an event that the call does not support. Passing a completion object that contains a request whose type does not match the types provided by the corresponding completion event, as described in §7.1, also results in undefined behavior.
- <sup>2</sup> If a UPC++ call provides both operation and remote completion, then at least one must be requested by the provided completion object. If a call provides operation but not remote completion, then operation completion must be requested. The behavior of the program is undefined if neither operation nor remote completion is requested from a call that supports one or both of operation or remote completion.
- <sup>3</sup> A promise object associated with a promise-based completion request must have a dependency count greater than zero when the completion object is passed to a UPC++ operation.

The result is undefined if the same promise object is used in multiple requests for notifications that produce values.

## 7.2.2 Completion and Return Types

- 1 In subsequent API-reference sections, the opaque type of a completion object is denoted by `CType`. Similarly, `RType` denotes a return type that is dependent on the completion object passed to a UPC++ call. This return type is as follows:
  - 2 • `void`, if no future-based completions are requested
  - 3 • `future<T...>`, if a single future-based completion is requested, where `T...` is the sequence of types associated with the given completion event
  - 4 • `std::tuple<future<T...>...>`, if multiple future-based completions are requested, where each future's arguments `T...` is the sequence of types associated with the corresponding completion event
- 5 Type deduction, such as with `auto`, is recommended when working with completion objects and return types.

## 7.2.3 Default Completions

- 1 If a completion object is not explicitly provided to a communication call, then a default completion object is used. For most calls, the default is `operation_cx::as_future()`. However, for `rpc_ff`, the default completion is `source_cx::as_buffered()`, and for `rpc`, it is `source_cx::as_buffered() | operation_cx::as_future()`. The default completion of a UPC++ communication call is listed in its API reference.

## 7.3 API Reference

```
1 struct source_cx;  
  
   struct remote_cx;  
  
   struct operation_cx;
```

- 2 Types that contain static member functions for constructing completion objects for source, remote, and operation completion.

3 `[static] CType source_cx::as_future();`

`[static] CType operation_cx::as_future();`

4 Constructs a completion object that represents notification of source or operation completion with a future.

5 *UPC++ progress level: none*

6 `template<typename ...T>`  
`[static] CType source_cx::as_promise(promise<T...> &pro);`

`template<typename ...T>`  
`[static] CType operation_cx::as_promise(promise<T...> &pro);`

7 *Precondition:* `pro` must have a dependency count greater than zero.

8 Constructs a completion object that represents signaling the given promise upon source or operation completion.

9 *UPC++ progress level: none*

10 `template<typename Func>`  
`[static] CType source_cx::as_lpc(persona &target, Func func);`

`template<typename Func>`  
`[static] CType operation_cx::as_lpc(persona &target, Func func);`

11 *Precondition:* `Func` must be a function-object type and CopyConstructible. `func` must not throw an exception when invoked.

12 Constructs a completion object that represents the enqueueing of `func` on the given local `persona` upon source or operation completion.

13 *UPC++ progress level: none*

14 `template<typename Func, typename ...Args>`  
`[static] CType remote_cx::as_rpc(Func func, Args... &&args);`

15 *Precondition:* `Func` must be `Serializable` and `CopyConstructible` and a function-object type. Each of `Args...` must either be a `DefinitelySerializable` and `CopyConstructible` type, or `dist_object<T>&`, or `team&`. The call `func(args...)` must not throw an exception.

16 Constructs a completion object that represents the enqueueing of `func` on a target process upon remote completion.

17 *UPC++ progress level: none*

18 `[static] CType source_cx::as_buffered();`

19 Constructs a completion object that represents buffering source-side resources or blocking until they are consumed before a communication call returns, delaying the return until the source-completion event occurs.

20 *UPC++ progress level: none*

21 `[static] CType source_cx::as_blocking();`

22 Constructs a completion object that represents blocking until source-side resources are consumed before a communication call returns, delaying the return until the source-completion event occurs.

23 *UPC++ progress level: none*

24 `template<typename CTypeA, CTypeB>`  
`CType operator|(CTypeA a, CTypeB b);`

25 *Precondition:* `CTypeA` and `CTypeB` must be completion types.

26 Constructs a completion object that is the union of the completions in `a` and `b`. Future-based completions in the result are ordered the same as in `a` and `b`, with those in `a` preceding those in `b`.

27 *UPC++ progress level: none*

# Chapter 8

## One-Sided Communication

### 8.1 Overview

- <sup>1</sup> The main one-sided communication functions for UPC++ are `rput` and `rget`. Where possible, the underlying transport layer will use RDMA techniques to provide the lowest-latency transport possible. The type `T` used by `rput` or `rget` needs to be **DefinitelyTriviallySerializable**, as described in Chapter 6 (*Serialization*).

### 8.2 API Reference

#### 8.2.1 Remote Puts

```
1 template<typename T,  
        typename Completions=decltype(operation_cx::as_future())>  
RType rput(T value, global_ptr<T> dest,  
          Completions cxs=Completions{});
```

- <sup>2</sup> *Precondition:* `T` must be `DefinitelyTriviallySerializable`.
- <sup>3</sup> Initiates a transfer of `value` that will store it in the memory referenced by `dest`.
- <sup>4</sup> Remote-completion operations execute on the master persona of the process associated with the destination (i.e. `dest.where()`).

*Completions:*

- 5       • *Remote*: Indicates completion of the transfer of `value`.
- 6       • *Operation*: Indicates completion of all aspects of the operation: the transfer and remote stores are complete.

7       *C++ memory ordering*: The writes to `dest` will have a *happens-before* relationship with the operation-completion notification actions (future readying, promise fulfillment, or persona LPC enlistment) and remote-completion actions (RPC enlistment). For LPC and RPC completions, all evaluations *sequenced-before* this call will have a *happens-before* relationship with the execution of the completion function.

8       *UPC++ progress level*: `internal`

```
9  template<typename T,  
      typename Completions=decltype(operation_cx::as_future())>  
RType rput(T const *src, global_ptr<T> dest, std::size_t count,  
          Completions cxs=Completions{});
```

10       *Precondition*: `T` must be `DefinitelyTriviallySerializable`. The source and destination memory regions must not overlap. `src` and `dest` must not be null pointers, even if `count` is zero.

11       Initiates an operation to transfer and store the `count` items of type `T` beginning at `src` to the memory beginning at `dest`. The values referenced in the `[src,src+count)` interval must not be modified until either source or operation completion is indicated.

12       Remote-completion operations execute on the master persona of the process associated with the destination (i.e. `dest.where()`).

*Completions:*

- 13       • *Source*: Indicates completion of injection or internal buffering of the source values, signifying that the `src` buffer may be modified.
- 14       • *Remote*: Indicates completion of the transfer of the values, implying readiness of the target buffer `[dest,dest+count)`.
- 15       • *Operation*: Indicates completion of all aspects of the operation: the transfer and remote stores are complete.

16 *C++ memory ordering:* The reads of `src` will have a *happens-before* relationship with the source-completion notification actions (future readying, promise fulfillment, or persona LPC enlistment). The writes to `dest` will have a *happens-before* relationship with the operation-completion notification actions (future readying, promise fulfillment, or persona LPC enlistment) and remote-completion actions (RPC enlistment). For LPC and RPC completions, all evaluations *sequenced-before* this call will have a *happens-before* relationship with the execution of the completion function.

17 *UPC++ progress level:* `internal`

## 8.2.2 Remote Gets

```
1 template<typename T,
      typename Completions=decltype(operation_cx::as_future())>
RType rget(global_ptr<T> src,
           Completions cxs=Completions{});
```

2 *Precondition:* T must be DefinitelyTriviallySerializable.

3 Initiates a transfer to this process of a single value of type T located at `src`. The value will be transferred to the calling process and delivered in the operation-completion notification.

*Completions:*

4 

- *Operation:* Indicates completion of all aspects of the operation, including transfer and readiness of the resulting value. This completion produces a value of type T.

5 *C++ memory ordering:* The read of `src` will have a *happens-before* relationship with the operation-completion notification actions (future readying, promise fulfillment, or persona LPC enlistment). All evaluations *sequenced-before* this call will have a *happens-before* relationship with the invocation of any LPC associated with operation completion.

6 *UPC++ progress level:* `internal`

```
7 template<typename T,  
      typename Completions=decltype(operation_cx::as_future())>  
  RType rget(global_ptr<T> src, T *dest, std::size_t count,  
            Completions cxs=Completions{});
```

8     *Precondition:* T must be DefinitelyTriviallySerializable. The source and destination memory regions must not overlap. `src` and `dest` must not be null pointers, even if `count` is zero.

9     Initiates a transfer of `count` values of type T beginning at `src` and stores them in the locations beginning at `dest`. The source values must not be modified until operation completion is notified.

*Completions:*

10     

- *Operation:* Indicates completion of all aspects of the operation, including transfer and readiness of the resulting values.

11     *C++ memory ordering:* The reads of `src` and writes to `dest` will have a *happens-before* relationship with the operation-completion notification actions (future readying, promise fulfillment, or persona LPC enlistment). All evaluations *sequenced-before* this call will have a *happens-before* relationship with the invocation of any LPC associated with operation completion.

12     *UPC++ progress level:* **internal**



# Chapter 9

## Remote Procedure Call

### 9.1 Overview

- <sup>1</sup> UPC++ provides remote procedure calls (RPCs) for injecting function calls into other processes. These injections are one-sided, meaning the recipient is not required to explicitly acknowledge which functions are expected. Concurrent with a process's execution, incoming RPCs accumulate in an internal queue managed by UPC++. The only control a process has over inbound RPCs is when it would like to check its inbox for arrived function calls and execute them. Draining the RPC inbox is one of the many responsibilities of the progress API (see Ch. 10, *Progress*).
- <sup>2</sup> There are two main flavors of RPC in UPC++: *fire-and-forget* (`rpc_ff`) and *round trip* (`rpc`). Each takes a function `Func` together with variadic arguments `Args`.
- <sup>3</sup> The `rpc_ff` call serializes the given function and arguments into a message destined for the recipient, and guarantees that this function call will be placed eventually in the recipient's inbox. The round-trip `rpc` call does the same, but also forces the recipient to reply to the sender of the RPC with a message containing the return value of the function, providing the value for operation completion of the sender's invocation of `rpc`. Thus, when the future is ready, the sender knows the recipient has executed the function call. Additionally, if the return value of `func` is a future, the recipient will wait for that future to become ready before sending its result back to the sender.
- <sup>4</sup> There are important restrictions on what the permissible types for `func` and its bound arguments can be for RPC functions. First, the `Func` type must be a function object (has a publicly accessible overload of the function call operator, `operator()`). Second, `Func`

must be Serializable, and all `Args...` types must be DefinitelySerializable (see Ch. 6, *Serialization*).

## 9.2 Remote Hello World Example

- Figure 9.1 shows a simple alternative *Hello World* example where each process issues an `rpc` to its neighbor, where the last rank wraps around to 0.

```
1 #include <upcxx/upcxx.hpp>
2 #include <iostream>
3 void hello_world(inrank_t num){
4     std::cout << "Rank " << num << " told rank " << upcxx::rank_me()
5         << " to say Hello World" << std::endl;
6 }
7 int main(int argc, char** argv){
8     upcxx::init(); // Start UPC++ state
9     inrank_t remote = (upcxx::rank_me()+1)%upcxx::rank_n();
10    auto f = upcxx::rpc(remote, hello_world, upcxx::rank_me());
11    f.wait();
12    upcxx::finalize(); // Close down UPC++ state
13    return 0;
14 }
```

Figure 9.1: HelloWorld with Remote Procedure Call

## 9.3 API Reference

```
1 template<typename Func, typename ...Args>
  void rpc_ff(inrank_t recipient, Func &&func, Args &&...args);
  template<typename Completions, typename Func, typename ...Args>
  RType rpc_ff(inrank_t recipient, Completions cxs,
              Func &&func, Args &&...args);
  template<typename Func, typename ...Args>
  void rpc_ff(team &team, inrank_t recipient,
              Func &&func, Args &&...args);
  template<typename Completions, typename Func, typename ...Args>
  RType rpc_ff(team &team, inrank_t recipient, Completions cxs,
              Func &&func, Args &&...args);
```

2 *Precondition:* `Func` must be a Serializable type and a function-object type. Each of `Args...` must be a DefinitelySerializable type, or `dist_object<T>&`, or `team&`. The call `func(args...)` must not throw an exception.

3 In the first and third variants, the `func` and `args...` are serialized and internally buffered before the call returns. The call `rpc_ff(rank, func, args...)` is equivalent to:

```
rpc_ff(rank, source_cx::as_buffered(), func, args...)
```

4 In the second and fourth variants, if buffered source completion is not requested, the `func` and `args...` are serialized at an unspecified time between the invocation of `rpc_ff` and source completion. The serialized results are retained internally until they are eventually sent.

5 In the first two variants, the target of the RPC is the process whose rank is `recipient` in the world team (Ch. 11). In the latter two variants, the target is the process whose rank is `recipient` relative to the the given team.

6 After their receipt on the target, the data are deserialized and `func(args...)` is enlisted for execution during user-level progress of the master persona. So long as the sending persona continues to make internal-level progress it is guaranteed that the message will eventually arrive at the recipient. See §10.5.3 `progress_required` for an understanding of how much internal-progress is necessary.

7 The execution of `func(args...)` is never performed synchronously, even if the target is the same as the calling process and this function is invoked during user-level progress.

8 Special handling is applied to those members of `args` which are either a reference to `dist_object` type or a `team`, as described in §6.4.

#### *Completions:*

- 9 • *Source:* Indicates completion of serialization of the function object and arguments.

10 *C++ memory ordering:* All evaluations *sequenced-before* this call will have a *happens-before* relationship with the source-completion notification actions (future readying, promise fulfillment, or persona LPC enlistment) and the recipient's invocation of `func`.

11 *UPC++ progress level:* `internal`

```
12 template<typename Func, typename ...Args>
    future_invoke_result_t<Func, Args...>
        rpc(intrank_t recipient, Func &&func, Args &&...args);
    template<typename Completions, typename Func, typename ...Args>
    RType rpc(intrank_t recipient, Completions cxs,
        Func &&func, Args &&...args);
    template<typename Func, typename ...Args>
    future_invoke_result_t<Func, Args...>
        rpc(team &team, intrank_t recipient,
            Func &&func, Args &&...args);
    template<typename Completions, typename Func, typename ...Args>
    RType rpc(team &team, intrank_t recipient, Completions cxs,
        Func &&func, Args &&...args);
```

13 *Precondition:* Func must be a Serializable type and a function-object type. Each of Args... must be either a DefinitelySerializable type, or dist\_object<T>&, or team&. Additionally, std::result\_of<Func(Args...)>::type must be either a DefinitelySerializable type that is not view<U, IterType>, or future<T...>, where each type in T... must be DefinitelySerializable but not view<U, IterType>. The call func(args...) must not throw an exception.

14 Similar to rpc\_ff, this call sends func and args... to be executed remotely, but additionally provides an operation-completion event that produces the value returned from the remote invocation of func(args...), if it is non-void.

15 In the first and third variants, the func and args... are serialized and internally buffered before the call returns. The call rpc(rank, func, args...) is equivalent to:

```
rpc(rank,
    source_cx::as_buffered() | operation_cx::as_future(),
    func, args...)
```

16 In the second and fourth variants, if buffered source completion is not requested, the func and args... are serialized at an unspecified time between the invocation of rpc and source completion. The serialized results are retained internally until they are eventually sent.

17 In the first two variants, the target of the RPC is the process whose rank is recipient in the world team (Ch. 11). In the latter two variants, the target is the process whose rank is recipient relative to the the given team.

18 After their receipt on the target, the data are deserialized and `func(args...)`  
is enlisted for execution during user-level progress of the master persona.

19 In the first variant, the returned future is readied upon operation completion.

20 For futures provided by an operation-completion request, or promises used in  
promise-based operation-completion requests, the type of the future or promise  
must correspond to the return type of `func(args...)` as follows:

- 21 • If the return type is of the form `future<T...>`, then a future provided by  
operation completion also has type `future<T...>`, and promises used in  
operation-completion requests must permit invocation of `fulfill_result`  
with values of type `T...`
- 22 • If the return type is some other non-void type `T`, then a future provided by  
operation completion has type `future<T>`, and promises used in operation-  
completion requests must permit invocation of `fulfill_result` with a  
value of type `T`.
- 23 • If the return type is `void`, then a future provided by operation completion  
has type `future<>`, and promises used in operation-completion requests  
may have any type `promise<T...>`.

24 Within user-progress of the recipient's master persona, the result from invoking  
`func(args...)` will be immediately serialized and eventually sent back to  
the initiating process. Upon receipt, it will be deserialized, and operation-  
completion notifications will take place during subsequent user-progress of the  
initiating persona.

25 The execution of `func(args...)` is never performed synchronously, even if the  
target is the same as the calling process and this function is invoked during  
user-level progress.

26 The same special handling applied to `dist_object&` and `team&` arguments by  
`rpc_ff` is also done by `rpc`.

*Completions:*

- 27 • *Source:* Indicates completion of serialization of the function object and  
arguments.
- 28 • *Operation:* Indicates completion of all aspects of the operation: serial-  
ization, deserialization, remote invocation, transfer of any result, and de-  
struction of any internally managed values are complete. This completion  
produces a value as described above.

29     *C++ memory ordering*: All evaluations *sequenced-before* this call will have a *happens-before* relationship with the invocation of `func`. The return from `func`, will have a *happens-before* relationship with the operation-completion actions (future readying, promise fulfillment, or persona LPC enlistment). For LPC completions, all evaluations *sequenced-before* this call will have a *happens-before* relationship with the execution of the completion function.

30     *UPC++ progress level*: **internal**

# Chapter 10

## Progress

### 10.1 Overview

- <sup>1</sup> UPC++ presents a highly-asynchronous interface, but guarantees that user-provided callbacks will only ever run on user threads during calls to the library. This guarantees a good user-visibility of the resource requirements of UPC++, while providing a better interoperability with other software packages which may have restrictive threading requirements. However, such a design choice requires the application developer to be conscientious about providing UPC++ access to CPU cycles.
- <sup>2</sup> Progress in UPC++ refers to how the calling application allows the UPC++ internal runtime to advance the state of its outstanding asynchronous operations. Any asynchronous operation initiated by the user may require the application to give UPC++ access to the execution thread periodically until the operation reports its completion. Such access is granted by simply making calls into UPC++. Each UPC++ function's contract to the user contains its *progress guarantee* level. This is described by the members of the `upcxx::progress_level` enumerated type:
- <sup>3</sup> `progress_level::user` UPC++ may advance its internal state as well as signal completion of user-initiated operations. This may entail the firing of remotely injected procedure calls (RPCs), or readying/fulfillment of futures/promises and the ensuing callback cascade.
- <sup>4</sup> `progress_level::internal` UPC++ may advance its internal state, but no notifications will be delivered to the application. Thus, an application has very limited ways to “observe” the effects of such progress.

- <sup>5</sup> *Progress level: none* UPC++ will not attempt to advance the progress of asynchronous operations. (Note this level does not have an explicit entry in the `progress_level` enumerated type).
- <sup>6</sup> The most common progress guarantee made by UPC++ functions is `progress_level::internal`. This ensures the delivery of notifications to remote processes (or other threads) making *user*-level progress in a timely manner. In order to avoid having the user contend with the cost associated with callbacks and RPCs being run anytime a UPC++ function is entered, `progress_level::user` is purposefully not the common case.
- <sup>7</sup> `progress` is the notable function enabling the application to make *user*-level progress. Its sole purpose is to look for ready operations involving this process or thread and run the associated RPC/callback code.
- <sup>8</sup> `upcxx::progress(progress_level lev = progress_level::user)`
- <sup>9</sup> UPC++ execution phases which leverage asynchrony heavily tend to follow a particular program structure. First, initial communications are launched. Their completion callbacks might then perform a mixture of compute or further UPC++ communication with similar, cascading completion callbacks. Then, the application spins on `upcxx::progress()`, checking some designated application state which monitors the amount of pending outgoing/incoming/local work to be done. For the user, understanding which functions perform these progress spins becomes crucial, since any invocation of user-level progress may execute RPCs or callbacks.

## 10.2 Restricted Context

- <sup>1</sup> During user-level progress made by UPC++, callbacks may be executed. Such callbacks are subject to restrictions on how they may further invoke UPC++ themselves. We designate such restricted execution of callbacks as being in the *restricted context*. The general restriction is stated as:
- <sup>2</sup> *User code running in the restricted context must assume that for the duration of the context all other attempts at making user-level progress, from any thread on any process, may result in a no-op every time.*
- <sup>3</sup> The immediate implication is that a thread which is already in the restricted context should assume no-op behavior from further attempts at making progress. This makes it pointless to try and wait for UPC++ notifications from within restricted context since there is no viable mechanism to make the notifications visible to the user. Thus, calling any routine which spins on user-level progress until some notification occurs will likely hang the thread.



## 10.3 Attentiveness

<sup>1</sup> Many UPC++ operations have a mechanism to signal completion to the application. However, a performance-oriented application will need to be aware of an additional asynchronous operation status indicator called *progress-required*. This status indicates that for a particular operation further advancements of the current process or thread's *internal*-level progress are necessary so that completion regarding remote entities (e.g. notification of delivery) can be reached. Once an operation has left the progress-required state, UPC++ guarantees that remote entities will see their side of the operations' completion without any further progress by the current compute resource. Applications will need to leverage this information for performance, as it is inadvisable for a compute resource to become inattentive to UPC++ progress (e.g. long bouts of arithmetic-heavy computation) while other entities depend on operations that require further servicing.

<sup>2</sup> As said previously, nearly all UPC++ operations track their completion individually. However, it is not possible for the programmer to query UPC++ if individual operations no longer require further progress. Instead, the user may ask UPC++ when all operations initiated by this process have reached a state at which they no longer require progress. This is achieved by using the following functions:

```
3 bool upcxx::progress_required();
    void upcxx::discharge();
```

<sup>4</sup> The `progress_required` function reports whether this process requires progress, allowing the application to know that there are still pending operations that will not achieve remote completion without further advancements to internal progress. This is of particular importance before an application enters a lapse of inattentiveness (for instance, performing expensive computations) in order to prevent slowing down remote entities.

<sup>5</sup> The `discharge` function allows an application to ensure that UPC++ does not require progress anymore. It is equivalent to the following:

```
6 void upcxx::discharge() {
    while (upcxx::progress_required())
        upcxx::progress(upcxx::progress_level::internal);
}
```

<sup>7</sup> A well-behaved UPC++ application is encouraged to call `discharge` before any long lapse of attentiveness to progress.

## 10.4 Thread Personas/Notification Affinity

- <sup>1</sup> As explained in Chapter 5 *Futures and Promises*, futures require careful consideration when used in the presence of thread concurrency. It is crucial that UPC++ is very explicit about how a multi-threaded application can safely use futures returned by UPC++ calls.
- <sup>2</sup> The most important thing an application has to be aware of is which thread UPC++ will use to signal completion of a given future. It is therefore extremely important to know that UPC++ will use the same thread to which the future was returned by the UPC++ operation (i.e. the thread which invoked the operation in the first place). This means that the thread which invoked a future-returning operation will be the only one able to see that operation's completion. As UPC++ triggers futures only during a call which makes user-level progress, the invoking thread must continue to make such progress calls until the future is satisfied. This requirement has the drawback of banning the application from doing the following: initiating a future-returning operation on one thread, allowing that thread to terminate or become permanently inattentive (e.g. sleeping in a thread pool), and expecting a different thread to receive the future's completion. This section will focus on two ways the application can still attain this use-case.
- <sup>3</sup> The notion of "thread" has been used in a loose fashion throughout this document, the natural interpretation being an operating system (OS) thread. More precisely, this document uses the notion of "thread" to denote a UPC++ device referred to as *thread persona* which generalizes the notion of operating system threads.
- <sup>4</sup> A UPC++ thread persona is a collection of UPC++-internal state usually attributed to a single thread. By making it a proper construct, UPC++ allows a single OS thread to switch between multiple application-defined roles for processing notifications. Personas act as the receivers for notifications generated by the UPC++ runtime.
- <sup>5</sup> Values of type `upcxx::persona` are non-copyable, non-moveable objects which the application can instantiate as desired. For each OS thread, UPC++ internally maintains a stack of *active* persona references. The top of this stack is the *current* persona. All asynchronous UPC++ operations will have their notification events (signaling of futures or promises) sent to the current persona of the OS thread invoking the operation. Calls that make user-level progress will process notifications destined to any of the active personas of the invoking thread. The initial state of the persona stack consists of a single entry pointing to a persona created by UPC++ which is dedicated to the current OS thread. Therefore, if the application never makes any use of the persona API, notifications will be processed solely by the OS thread that initiates the operation.
- <sup>6</sup> Pushing and popping personas from the persona stack (hence changing the current persona) is done with the `upcxx::persona_scope` type. For example:

```

1 persona scheduler_persona;
2 std::mutex scheduler_lock;
3
4 { // Scope block delimits domain of persona_scope instance.
5   auto scope = persona_scope(scheduler_lock, scheduler_persona);
6
7   // All following upcxx actions will use 'scheduler_persona'
8   // as current.
9
10  // ...
11
12  // 'scope' destructs:
13  // - 'scheduler_persona' dropped from active set if it
14  //   wasn't active before the scope's construction.
15  // - Previously current persona revived.
16  // - Lock released.
17 }

```

7 Since UPC++ will assume an OS thread has exclusive access to all of its active personas, it is the user's responsibility to ensure that no OS threads share an active persona concurrently. The use of the `persona_scope` constructor, which takes a lock-like synchronization primitive, is strongly encouraged to facilitate in enforcing this invariant.

8 There are two ways that asynchronous operations can be initiated by a given OS thread but retired in another. The first solution is simple:

1. The user defines a persona P.
2. Thread 1 activates P, initiates the asynchronous operation, and releases P.
3. Thread 1 synchronizes with Thread 2, indicating the operation has been initiated.
4. Thread 2 activates P, spins on `progress` until the operation completes.

9 Care must be taken that any futures created by phase 2 are never altered (uttered) concurrently. The same synchronization that was used to enforce exclusivity of persona acquisition can be leveraged to protect the future as well.

10 While this technique achieves our goal of different threads initiating and resolving asynchronous operations, it fails a different but also desirable property. It is often desirable to allow multiple threads to issue communication *concurrently* while delegating a separate thread to handle the notifications. To achieve this, it is clear that multiple personas are needed. Indeed, the exclusivity of a persona being current to only one OS thread prevents the application from concurrent initiation of communication.

<sup>11</sup> In order to issue operations and concurrently retire them in a different thread, the user is strongly encouraged to use the LPC completion mechanism described in Chapter 7, as opposed to the future or promise variants. An example of such a call is:

```
12 rget(gp_ptr_src, operation_cx::as_lpc(some_persona, callback_func));
```

<sup>13</sup> In addition to the arguments necessary for the particular operation, the `as_lpc` completion mechanism takes a persona reference and a C++ function object (lambda, etc.) such that upon completion of the operation, the designated persona shall execute the function object during its user-level progress. Using this mechanism, it is simple to have multiple threads initiating communication concurrently with a designated thread receiving the completion notifications. To achieve this, each operation is initiated by a thread using the agreed-upon persona of the receiver thread together with a callback that will incorporate knowledge of completion into the receiver's state.

## 10.5 API Reference

```
1 enum class progress_level {  
    /*none, -- not an actual member, conceptual only*/  
    internal,  
    user  
};  
  
2 void progress(progress_level lev = progress_level::user);
```

<sup>3</sup> This call will always attempt to advance internal progress.

<sup>4</sup> If `lev == progress_level::user` then this thread is also used to execute any available user actions for the personas currently active. Actions include:

1. Either future-readying or promise-fulfilling completion notifications for asynchronous operations initiated by one of the active personas. By the execution model of futures and promises this can induce callback cascade.
2. Continuation-style completion notifications from operations initiated by any persona but designating one of the active personas as the completion recipient.
3. RPCs destined for this process but only if the master persona is among the active set.
4. `lpc`'s destined for any of the active personas.

5 *UPC++ progress level: internal or user*

### 10.5.1 persona

1 `class persona;`

2 *C++ Concepts: DefaultConstructible, Destructible*

3 `persona::persona();`

4 Constructs a persona object with no enqueued operations.

5 *This function may be called when UPC++ is in the uninitialized state.*

6 *UPC++ progress level: none*

7 `persona::~~persona();`

8 Destructs this persona object. If this persona is a member of any thread's persona stack, the result of this call is undefined. If any operations are currently enqueued on this persona, or if any operations initiated by this persona require further progress, the result of this call is undefined.

9 *This function may be called when UPC++ is in the uninitialized state.*

10 *UPC++ progress level: none*

11 `template<typename Func>`  
12 `void persona::lpc_ff(Func func);`

12 *Precondition: Func must be a function-object type that can be invoked on zero arguments, and the call func() must not throw an exception.*

13 `std::move`'s `func` into an unordered collection of type-erased function objects to be executed during user-level progress of the targeted (this) persona. This function is thread-safe, so it may be called from any thread to enqueue work for this persona.

14 The execution of `func` is never performed synchronously, even if the target persona is a member of the caller's persona stack and this function is invoked during user-level progress.

15 *C++ memory ordering: All evaluations sequenced-before this call will have a happens-before relationship with the invocation of func.*

16 *UPC++ progress level: none*

```
17 template<typename Func>  
   future_invoke_result_t<Func> persona::lpc(Func func);
```

18     *Precondition:* **Func** must be a function-object type that can be invoked on zero arguments, and the call **func()** must not throw an exception.

19     **std::move**'s **func** into an unordered collection of type-erased function objects to be executed during user-level progress of the targeted (this) persona. The return value of **func** is asynchronously returned to the currently active persona in a future. If the return value of **func** is a future, then the targeted persona will wait for that future before signaling the future returned by **lpc** with its value. This function is thread-safe, so it may be called from any thread to enqueue work for this persona. Note that the future returned by **lpc** is considered to be owned by the currently active persona, the future returned by **func** (if any) will be considered owned by the target (this) persona.

20     The execution of **func** is never performed synchronously, even if the target persona is a member of the caller's persona stack and this function is invoked during user-level progress.

21     *C++ memory ordering:* All evaluations *sequenced-before* this call will have a *happens-before* relationship with the invocation of **func**, and the invocation of **func** will have a *happens-before* relationship with evaluations sequenced after the signaling of the final future.

22     *UPC++ progress level:* none

```
23 bool persona::active_with_caller() const;
```

24     Returns true if and only if this persona is a member of the calling OS thread's persona stack.

25     *UPC++ progress level:* none

```
26 persona& master_persona();
```

27     Returns a reference to the master persona automatically instantiated by the UPC++ runtime. The thread that executes **upcxx::init** implicitly acquires this persona as its current persona. The master persona is special in that it is the only one which will execute **RPCs** destined for this process. Additionally, some UPC++ functions may only be called by a thread with the master persona in its active stack.

28     *UPC++ progress level:* none

```
29 persona& current_persona();
```

30 Returns a reference to the persona on the top of the thread's active persona stack.

31 *UPC++ progress level: none*

```
32 persona& default_persona();
```

33 Returns a reference to the persona instantiated automatically and uniquely for this OS thread. The default persona is always the bottom of and can never be removed from its designated OS thread's active stack.

34 *UPC++ progress level: none*

```
35 void liberate_master_persona();
```

36 *Precondition:* This thread must be the one which called `upcxx::init`, it must have not altered its persona stack since calling `init`, and it must not have called this function already since calling `init`.

37 The thread which invokes `upcxx::init` implicitly has the master persona at the top of its active stack, yet the user has no `persona_scope` to drop to allow other threads to acquire the persona. Thus, if the user intends for other threads to acquire the master persona, they should have the `init`-calling thread release the persona with this function so that it can be claimed by `persona_scope`'s. Generally, if this function is ever called, it is done soon after `init` and then the master persona should be reacquired by a `persona_scope`.

38 *UPC++ progress level: none*

## 10.5.2 persona\_scope

```
1 class persona_scope;
```

2 *C++ Concepts:* Destructible, MoveConstructible

3 `persona_scope::persona_scope(persona &p);`

4 *Precondition:* Excluding this thread, `p` is not a member of any other thread's active stack.

5 Pushes `p` onto the top of the calling OS thread's active persona stack.

6 *UPC++ progress level:* none

7 `template<typename Mutex>`  
8 `persona_scope::persona_scope(Mutex &mutex, persona &p);`

8 *C++ Concepts of `Mutex`:* `Mutex`

9 *Precondition:* `p` will only be a member of some thread's active stack if that thread holds `mutex` in a locked state.

10 Invokes `mutex.lock()`, then pushes `p` onto the OS thread's active persona stack.

11 *UPC++ progress level:* none

12 `persona_scope::~persona_scope();`

13 *Precondition:* All `persona_scope`'s constructed on this thread since the construction of this instance have since destructed.

14 The persona supplied to this instance's constructor is popped from this thread's active stack. If this instance was constructed with the mutex constructor, then that mutex is unlocked.

15 *This function may be called when UPC++ is in the uninitialized state.*

16 *UPC++ progress level:* none

17 `persona_scope& top_persona_scope();`

18 Reference to the most recently constructed but not destructed `persona_scope` for this thread. Every thread begins with an implicitly instantiated scope pointing to its default persona that survives for the duration of the thread's lifetime.

19 *UPC++ progress level:* none



```
20 persona_scope& default_persona_scope();
```

21 Every thread begins with an implicitly instantiated scope pointing to its default persona that survives for the duration of the thread's lifetime. This function returns a reference to that bottommost `persona_scope` for the calling thread, which points at the calling thread's `default_persona()`.

22 *UPC++ progress level: none*

### 10.5.3 Outgoing Progress

```
1 bool progress_required(persona_scope &ps = top_persona_scope());
```

2 *Precondition:* `ps` has been constructed by this thread.

3 For the set of personas included in this thread's active stack section bounded inclusively between `ps` and the current top, *nearly* answers if any UPC++ operations initiated by those personas require further advancement of internal-progress of their respective personas before their completion events will be eventually available to user-level progress on the destined processes. The exact meaning of the return value depends on which personas are selected by `ps`:

4 • If `ps` *does not* include the master persona: A return value of `true` means that one or more of the personas indicated by `ps` requires further internal-progress to achieve completion of its outgoing operations. A value of `false` means that none of the personas indicated by `ps` require internal-progress, but internal-progress of the master persona might still be required.

5 • If `ps` *does* include the master persona: A return value of `true` means that one or more of the personas indicated by `ps` requires further internal-progress to achieve completion of its outgoing operations. A return value of `false` means that none of the non-master personas indicated by `ps` requires further internal-progress, but the master persona may or may not require further internal-progress.

6 *UPC++ progress level: none*

```
7 void discharge(persona_scope &ps = top_persona_scope());
```

8 Advances internal-progress enough to ensure that `progress_required(ps)` returns `false`.

9 *UPC++ progress level: internal*

# Chapter 11

## Teams

### 11.1 Overview

- <sup>1</sup> UPC++ provides *teams* as a means of grouping processes. UPC++ uses `teams` for collective operations (Ch. 12). `team` construction is collective and should be considered moderately expensive and done as part of the set-up phase of a calculation. `teams` are similar to `MPI_Groups` and the default `team` is `world()`. `teams` are considered special when it comes to serialization. Each `team` has a unique `team_id` that is equal across the `team` and acts as an opaque handle. Any process that is a member of the `team` can retrieve the `team` object with the `team_id::here()` function. Hence, coordinating processes can reference specific `teams` by their `team_id`.
- <sup>2</sup> While a process within a UPC++ SPMD program can have multiple `inrank_t` values that represent their relative placement in several `teams`, it is the `inrank_t` in the `world()` team that is used in most UPC++ functions, unless otherwise specifically noted. For example, `broadcast` takes a rank relative to the specific team over which it operates.

### 11.2 Local Teams

- <sup>1</sup> The local team is an ordered set of processes where heap storage in the shared segment allocated by any process in the team is local to all members. Any process can obtain a reference to the local team by calling `local_team` and global pointers behave accordingly:

1. `global_ptr`'s referencing objects allocated in the shared segment of processes that are members of this `team` will report `is_local() == true` and `local()` will return a valid `T*` referencing the corresponding object.
  2. The `global_ptr` `where()` function will report the rank in `team world()` of the process that originally acquired the referenced object using the functions in chapter 4.
- 2 It is *not* guaranteed that the `T*`'s obtained by different processes to the same shared object will have bit-wise identical pointer values. In the general case, peers may have different virtual addresses for the same physical memory.

## 11.3 API Reference

### 11.3.1 `team`

```
1 class team;
```

```
2     C++ Concepts: MoveConstructible, Destructible
```

```
3 constexpr intrank_t team::color_none;
```

```
4     A constant used to specify that the calling process of split() will not be a member of any subteam. This constant is guaranteed to have a negative value.
```

```
5 intrank_t team::rank_n() const;
```

```
6     Returns the number of ranks in the given team.
```

```
7     UPC++ progress level: none
```

```
8 intrank_t team::rank_me() const;
```

```
9     Returns the rank of the calling process in the given team.
```

```
10    UPC++ progress level: none
```

11 `intrank_t team::operator [] (intrank_t peer_index) const;`

12 *Precondition:* `peer_index >= 0` and `peer_index < rank_n()`.

13 Returns the rank in the `world()` team of the process with rank `peer_index` in this team.

14 *UPC++ progress level:* unspecified between `none` and `internal`

15 `intrank_t team::from_world(intrank_t world_index) const;`  
`intrank_t team::from_world(intrank_t world_index,`  
`intrank_t otherwise) const;`

16 *Precondition:* `world_index >= 0` and `world_index < world().rank_n()`. For the single-argument overload, the process with rank `world_index` in the `world()` team must be a member of this team.

17 Returns the rank in this team of the process with rank `world_index` in the `world()` team. For the two-argument overload, if that process is not a member of this team then the value of `otherwise` is returned.

18 *UPC++ progress level:* unspecified between `none` and `internal`

19 `team team::split(intrank_t color, intrank_t key);`

20 *This function is collective (§12.1) over this (i.e. the parent) team, and it must be called by the thread that has the master persona (§10.5.1).*

21 *Precondition:* `color >= 0 || color == team::color_none`

22 Splits the given team into subteams based on the `color` and `key` arguments. If `color == team::color_none`, the return value is an invalid team that cannot be used in any UPC++ operation except `~team`. Otherwise, all processes that call the function with the same `color` value will be separated into the same subteam. Ranks in the same subteam will be numbered according to their position in the sequence of sorted key values. If two callers specify the same combination of `color` and `key`, their relative ordering in the subteam will be the same as in the parent team. The return value is the team representing the calling processes's new subteam.

23 This call will invoke user-level progress, so the caller may expect incoming RPCs to fire before it returns.

24 *C++ memory ordering:* With respect to all threads participating in this collective, all evaluations which are *sequenced-before* their respective thread's invocation of this call will have a *happens-before* relationship with all evaluations sequenced after the call.

25 *UPC++ progress level:* `user`

26 `team::team(team &&other);`

27 *Precondition:* Calling thread must have the master persona. No operation on this team, nor any UPC++ operation with a progress level other than `none`, may have been invoked by the calling process between the creation of `other` and this call.

28 Makes this instance the calling process's representative of the team associated with `other`, transferring all state from `other`. Invalidates `other`, and any subsequent operations on `other`, except for destruction, produce undefined behavior.

29 *UPC++ progress level:* `none`

30 `void team::destroy(entry_barrier lev = entry_barrier::user);`

31 *This function is collective (§12.1) over this team, and it must be called by the thread that has the master persona (§10.5.1).*

32 *Precondition:* This instance must not have been invalidated by being passed to the move constructor, and it must not be an invalid team that resulted from a call to `split()`. `lev` must be single-valued (Ch. 12). After the entry barrier specified by `lev` completes, or upon entry if `lev == entry_barrier::none`, the operations on this team must not require internal-level or user-level progress from any persona before they can complete.

33 Destroys the calling process's state associated with the team. Further lookups on this process using the `team_id` corresponding to this team will have undefined behavior.

34 *C++ memory ordering:* If `lev != entry_barrier::none`, with respect to all threads participating in this collective, all evaluations which are *sequenced-before* their respective thread's invocation of this call will have a *happens-before* relationship with all evaluations sequenced after the call.

35 *UPC++ progress level:* `user` if `lev == entry_barrier::user`,  
`internal` otherwise

36 `team::~~team();`

37 *Precondition:* Either UPC++ must have been uninitialized since the team's creation, or the team must either have had `destroy()` called on it, been invalidated by being passed to the move constructor, or be an invalid team that resulted from a call to `split()`.

38 Destroys this `team` object.

39 *This function may be called when UPC++ is in the uninitialized state.*

40 *UPC++ progress level: none*

41 `team_id team::id() const;`

42 Returns the universal name associated with this team.

43 *UPC++ progress level: none*

### 11.3.2 `team_id`

1 `class team_id;`

2 *C++ Concepts:* DefaultConstructible, TriviallyCopyable, StandardLayoutType, EqualityComparable, LessThanComparable, hashable

3 *UPC++ Concepts:* DefinitelyTriviallySerializable

4 A universal name representing a team.

5 `team_id::team_id();`

6 Initializes this name to be an invalid ID.

7 *UPC++ progress level: none*

8 `team& team_id::here() const;`

9 *Precondition:* This name must be a valid ID. The calling process must be a member of the `team` associated with this name, and it must have completed creation of the `team`. The `team` must not have been destroyed.

10 Retrieves a reference to the `team` instance associated with this name.

11 *UPC++ progress level: none*

```
12 future<team &> team_id::when_here() const;
```

13 *Precondition:* This name must be a valid ID. The calling process must be a member of the `team` associated with this name. The calling thread must have the master persona. The `team` must not have been destroyed.

14 Retrieves a future which is readied after the calling process constructs the `team` corresponding to this name.

15 *UPC++ progress level: none*

### 11.3.3 Fundamental Teams

```
1 team& world();
```

2 Returns a reference to the team representing all the processes in the UPC++ program. The result is undefined if a move is performed on the returned team.

3 *UPC++ progress level: none*

```
4 intrank_t rank_n();
```

5 Returns the number of ranks in the `world()` team.

6 Equivalent to: `world().rank_n()`.

7 *UPC++ progress level: none*

```
8 intrank_t rank_me();
```

9 Returns the rank of the calling process in the `world()` team.

10 Equivalent to: `world().rank_me()`.

11 *UPC++ progress level: none*

```
12 team& local_team();
```

13 Returns a reference to the local team containing this process. The local team represents an ordered set of processes where memory allocated from the shared segment of any member is local to all team members (§11.2). The result is undefined if a move is performed on the returned team.

14 *UPC++ progress level: none*

15 **bool** local\_team\_contains(intrank\_t world\_index);

16     *Precondition:* world\_index >= 0 and world\_index < world().rank\_n().

17     Determines if the process whose rank is world\_index in world() is a member of the local team containing the calling process (§11.2).

18     Equivalent to: local\_team().from\_world(world\_index,-1) >= 0

19     *UPC++ progress level:* none



# Chapter 12

## Collectives

- <sup>1</sup> A *collective operation* is a UPC++ operation that must be matched across all participating processes. Informally, any two processes that both participate in a pair of collective operations must agree on their ordering. Furthermore, if a parameter or other property of a collective operation is specified as *single-valued*, all participating processes must provide the same value for the parameter or property.
- <sup>2</sup> A collective operation need not provide any actual synchronization between processes, unless otherwise noted. The collective requirement simply states a relative ordering property of calls to collective operations that must be maintained in the parallel execution trace for all executions of any valid program. Some implementations may include unspecified synchronization between processes within collective operations, but programs must not rely upon the presence or absence of such unspecified synchronization for correctness.
- <sup>3</sup> UPC++ provides several collective communication operations over teams, described below.

### 12.1 Common Requirements

- <sup>1</sup> For an execution of a UPC++ program to be valid, the collective operations invoked by the program must obey the following ordering constraints:
  - <sup>2</sup> • For a collective operation  $C$  over a team  $T$ , let  $Participants(C)$  denote the set of processes that are members of  $T$ .
  - <sup>3</sup> • For a process  $P \in Participants(C_1) \cap Participants(C_2)$ , let  $Precedes_P(C_1, C_2)$  be true if and only if  $C_1 \neq C_2$  and  $C_1$  is initiated before  $C_2$  on  $P$ .

- 4 • Let *Collectives* be the set of collective operations invoked during execution of the program. The collectives must satisfy the following property:

$$\forall C_1, C_2 \in \text{Collectives}. \forall P, Q \in \text{Participants}(C_1) \cap \text{Participants}(C_2). \quad (12.1) \\ \text{Precedes}_P(C_1, C_2) = \text{Precedes}_Q(C_1, C_2)$$

- 5 The constraints above formalize the notion that any two processes that both participate in a pair of collectives must agree on their ordering.
- 6 A collective operation must be invoked by the thread that has the master persona (§10.5.1) of a process.

## 12.2 API Reference

```
1 enum class entry_barrier {  
    none,  
    internal,  
    user  
};
```

- 2 Constants used with some UPC++ operations to specify the entry barrier to be used by the operation:

- 3 • **none**: the operation has no entry barrier
- 4 • **internal**: the operation should perform a barrier at entry that makes only internal-level progress
- 5 • **user**: the operation should perform a barrier at entry that makes user-level progress

```
6 void barrier(team &team = world());
```

- 7 *This function is collective (§12.1) over the given team, and it must be called by the thread that has the master persona (§10.5.1).*

- 8 Performs a barrier operation over the given team. The call will not return until all processes in the team have entered the call. There is no implied relationship between this call and other in-flight operations. This call will invoke user-level progress, so the caller may expect incoming RPCs to fire before it returns.

9 *C++ memory ordering:* With respect to all threads participating in this collective, all evaluations which are *sequenced-before* their respective thread's invocation of this call will have a *happens-before* relationship with all evaluations sequenced after the call.

10 *UPC++ progress level:* **user**

```
11 template<typename Completions=decltype(operation_cx::as_future())>
RType barrier_async(team &team = world(),
                    Completions cxs=Completions{});
```

12 *This function is collective (§12.1) over the given team, and it must be called by the thread that has the master persona (§10.5.1).*

13 Initiates an asynchronous barrier operation over the given team. The call will return without waiting for other processes to make the call. Operation completion will be signaled after all other processes in the team have entered the call.

*Completions:*

14 

- *Operation:* Indicates completion of the collective from the viewpoint of the caller, implying that all processes in the given team have entered the collective.

15 *C++ memory ordering:* With respect to all threads participating in this collective, all evaluations which are *sequenced-before* their respective thread's invocation of this call will have a *happens-before* relationship with all evaluations sequenced after the operation-completion notification actions (future readying, promise fulfillment, or persona LPC enlistment).

16 *UPC++ progress level:* **internal**

```
17 constexpr /*unspecified*/ op_fast_add;
constexpr /*unspecified*/ op_fast_mul;
constexpr /*unspecified*/ op_fast_min;
constexpr /*unspecified*/ op_fast_max;
constexpr /*unspecified*/ op_fast_bit_and;
constexpr /*unspecified*/ op_fast_bit_or;
constexpr /*unspecified*/ op_fast_bit_xor;
```

18 Instances of unspecified function-object types that have the following overloaded function-call operator:

19        `T operator()(T a, T b) const;`

20        The unspecified function-object types meet the requirements for the `BinaryOp` template parameter to `reduce_one` and `reduce_all` (e.g. they are referentially transparent and concurrently invocable).

21        For `op_fast_add`, `op_fast_mul`, `op_fast_min`, and `op_fast_max`, the allowed types for `T` are those for which `std::is_arithmetic<T>::value` is true. For `op_fast_bit_and`, `op_fast_bit_or`, and `op_fast_bit_xor`, the allowed types for `T` are those for which `std::is_integral<T>::value` is true.

22        The operation performed by the function-call operator is, respectively: binary `+`, binary `*`, `std::min`, `std::max`, binary `&`, `|`, and `^`. If `T` is `bool`, then `op_fast_add` and `op_fast_max` perform the same operation as `op_fast_bit_or`, and `op_fast_mul` and `op_fast_min` perform the same operation as `op_fast_bit_and`.

```
23  template<typename T, typename BinaryOp,
      typename Completions=decltype(operation_cx::as_future())>
  RType reduce_one(T &&value, BinaryOp &&op,
                  intrank_t root, team &team = world(),
                  Completions cxs=Completions{});
  template<typename T, typename BinaryOp,
      typename Completions=decltype(operation_cx::as_future())>
  RType reduce_all(T &&value, BinaryOp &&op, team &team = world(),
                  Completions cxs=Completions{});

  template<typename T, typename BinaryOp,
      typename Completions=decltype(operation_cx::as_future())>
  RType reduce_one(const T *src, T *dst, size_t count,
                  BinaryOp &&op,
                  intrank_t root, team &team = world(),
                  Completions cxs=Completions{});
  template<typename T, typename BinaryOp,
      typename Completions=decltype(operation_cx::as_future())>
  RType reduce_all(const T *src, T *dst, size_t count,
                  BinaryOp &&op, team &team = world(),
                  Completions cxs=Completions{});
```

24        *This function is collective (§12.1) over the given team, and it must be called by the thread that has the master persona (§10.5.1).*

- 25 *Precondition:* `T` must be `DefinitelyTriviallySerializable`. `BinaryOp` must be a function-object type representing an associative and commutative mathematical operation taking two values of type `T` and returning a value implicitly convertible to `T`. `BinaryOp` must be referentially transparent and concurrently invocable. `BinaryOp` may not invoke any UPC++ routine with a progress level other than none. In the first and third variants, `root` must be single-valued and a valid rank in `team`. In the third variant, `src` and `dst` on the process whose rank is `root` in the team may be equal but must not otherwise overlap, and `count` must be single-valued across all participants. In the fourth variant, `src` and `dst` may be equal but must not otherwise overlap, and `src == dst` and `count` must both be single-valued.
- 26 Performs a reduction operation over the processes in the given team.
- 27 If the team contains only a single process, then the resulting operation completion will produce `value` in the first two variants. In the latter two variants, the contents of `src` will be copied to `dst` if `src != dst`.
- 28 If the team contains more than one process, initiates an asynchronous reduction over the values provided by each process. The reduction is performed in some non-deterministic order by applying `op` to combine values and intermediate results. In the second and fourth variants, the order in which `op` is applied may differ between processes, so the results may differ if `op` is not fully associative and commutative (as with floating-point arithmetic on some operands). In the third and fourth variants, the contents of `src` are combined element-wise across the processes in the team, with the results placed in `dst`.
- 29 In the first variant, the process whose rank is `root` in `team` receives the result of the reduction as part of operation completion, while the remaining processes receive an undefined value.
- 30 In the second variant, each process receives the result of the reduction as part of operation completion.
- 31 In the third variant, operation completion signifies that the results have been stored in `dst` on the process whose rank is `root` in `team` and that `src` is no longer in use by the reduction. On the remaining processes, the argument `dst` is ignored, and operation completion signifies that `src` is no longer in use by the reduction.
- 32 In the fourth variant, operation completion on each process signifies that the results have been stored in `dst` on that process and that `src` is no longer in use by the reduction.

33 *Advice to users:* If `op` is one of `op_fast_*` and `T` is one of the allowed types for `op`, implementations may offload the reduction operations to the hardware network interface controller.

*Completions:*

34 

- *Operation:* Indicates completion of the collective from the viewpoint of the caller, implying that the results of the reduction are available to this process as described above. In the third and fourth variants, also signifies that the `src` buffer may be modified. In the first two variants, this completion produces a value of type `T`. In the latter two variants, this completion does not produce a value.

35 *C++ memory ordering:* With respect to all threads participating in this collective, all evaluations which are *sequenced-before* any thread's invocation of this call will have a *happens-before* relationship with all evaluations sequenced after the operation-completion notification actions (future readying, promise fulfillment, or persona LPC enlistment) on the threads that receive the results of the collective (on the root process in the first and third variants; on all participating processes in the second and fourth variants).

36 *UPC++ progress level:* **internal**

```
37 template<typename T,  
        typename Completions=decltype(operation_cx::as_future())>  
RType broadcast(T &&value, intrank_t root,  
               team &team = world(),  
               Completions cxs=Completions{});  
  
template<typename T,  
        typename Completions=decltype(operation_cx::as_future())>  
RType broadcast(T *buffer, std::size_t count,  
               intrank_t root, team &team = world(),  
               Completions cxs=Completions{});
```

38 *This function is collective (§12.1) over the given team, and it must be called by the thread that has the master persona (§10.5.1).*

39 *Precondition:* `root` must be single-valued and a valid rank in `team`. In the second variant, `count` must be single-valued. The type `T` must be `DefinitelyTriviallySerializable`.

40 Initiates an asynchronous broadcast (one-to-all) operation, with rank `root` in `team` acting as the producer of the broadcast. In the first variant, `value` will

be asynchronously sent to all processes in the team, encapsulated in operation completion, which will be signaled upon receipt of the value. In the second variant, the objects in `[buffer,buffer+count)` of rank `root` in `team` are sent to the addresses `[buffer,buffer+count)` provided by the receiving processes. Operation completion signals completion of the operation with respect to the calling process. For the root, this indicates that the given buffer is available for reuse, and for a receiver, it indicates that the data have been received in its buffer.

*Completions:*

- 41     • *Operation:* In the first variant, indicates that the value provided by the root is available at the caller, and this completion produces a value of type `T`. In the second variant, indicates completion of the collective from the viewpoint of the caller as described above, and this completion does not produce a value.
- 42     *C++ memory ordering:* With respect to all threads participating in this collective, all evaluations which are *sequenced-before* the producing thread's invocation of this call will have a *happens-before* relationship with all evaluations sequenced after the operation-completion notification actions (future readying, promise fulfillment, or persona LPC enlistment).
- 43     *UPC++ progress level:* `internal`

# Chapter 13

## Atomics

### 13.1 Overview

- <sup>1</sup> UPC++ supports atomic operations on shared memory locations. Atomicity entails that a read-modify-write sequence on a memory location will happen without interference or interleaving with other concurrently executing atomic operations. Atomicity is not guaranteed if a memory location is concurrently targeted by both atomic and non-atomic operations. The order in which concurrent atomics update the same memory is not guaranteed, not even for successively issued operations by a single process. Ordering of atomics with respect to other asynchronous operations is also not guaranteed. The only means to ensure such ordering is by waiting for one operation to complete before initiating its successor. Note that UPC++ atomics do not interoperate with `std::atomic`.
- <sup>2</sup> At this time, it is unclear how UPC++ will support mixing of atomic and non-atomic accesses to the same memory location. Until this is resolved, users must assume that for the duration of the program, once a memory location is accessed via a UPC++ atomic, only further atomic operations to that location will have meaningful results (note that even global barrier synchronization does not grant an exception to this rule). This unfortunately implies that deallocation of such memory is unsafe, as that would allow the memory to be reallocated to a context unaware of its constrained condition.
- <sup>3</sup> All atomic operations are associated with an *atomic domain*. An atomic domain is defined for an integer or floating-point type and a set of operations. Currently, the allowed types are `std::int32_t`, `std::uint32_t`, `std::int64_t`, `std::uint64_t`, `float`, and `double`. The list of operations is detailed in the API section below. A process's representative of an



atomic domain is an instance of an `atomic_domain` class, and the operations are defined as methods on that class.

- 4 An atomic domain is created collectively over a team. The result is a semantic binding of `atomic_domain` objects as a *collective object*. We use the phrase *atomic domain* to refer to this semantic binding. An atomic domain must be destroyed by the processes in the team collectively calling the `destroy()` member function, which releases the resources associated with the domain.
- 5 The use of atomic domains permits selection (at construction) of the most efficient available implementation which can provide correct results for the given set of operations on the given data type. This is important because the best possible implementation of a operation "X" may not be compatible with operation "Y". So, this best "X" can only be used when it is known that "Y" will not be used. This issue arises because a NIC may offload "X" (but not "Y") and use of a CPU-based implementation of "Y" would not be coherent with the NIC performing a concurrent "X" operation.
- 6 Similar to a mutex, an atomic domain exists independent of the data it applies to. User code is responsible for ensuring that data accessed via a given atomic domain is only accessed via that domain, never via a different domain or without use of a domain.
- 7 Users may create as many domains as needed to describe their uses of atomic operations, so long as there is at most one domain per atomic datum. If distinct data of the same type are accessed using differing sets of operations, then creation of distinct domains for each operation set is recommended to achieve the best performance on each set.
- 8 For example, to use atomic fetch-and-add, load and store operations on an `int64_t`, a user must first define a domain as follows:

```
9   atomic_domain<int64_t> ad_i64({atomic_op::load,
                                atomic_op::store,
                                atomic_op::fetch_add});
```

- 10 Each atomic operation works on a *global pointer* to the type given when the domain was constructed.
- 11 All atomic operations are non-blocking and provide an operation-completion event to indicate completion of the atomic. By default, all operations return futures. So, for example, this is the way to call an atomic operation for the previous example's domain:

```
1   global_ptr<int64_t> x = new_<int64_t>(0);
2   future<int64_t> f = ad_i64.fetch_add(x, 2,
3                                     std::memory_order_relaxed);
4   int64_t res = f.wait();
```

- <sup>12</sup> Atomic domains enable a user to select a subset of operations that are supported in hardware on a given platform, and hence more performant.

## 13.2 Deviations from IEEE 754

- <sup>1</sup> UPC++ atomics on `float` and `double` are permitted to deviate from the IEEE 754 standard [1], even where `float` and `double` otherwise conform to the standard in the underlying C++ implementation. For example, a UPC++ atomic may perform a `compare_exchange` operation on floating-point values as if they were integers of the same width, and it may compare floating-point values as if they were sign-and-magnitude-representation integers of the same width. This can lead to non-conforming behavior with respect to NaNs and negative zero.

## 13.3 API Reference

```
1 enum class atomic_op : int {
    load, store,
    compare_exchange,
    add, fetch_add,
    sub, fetch_sub,
    mul, fetch_mul,
    min, fetch_min,
    max, fetch_max,
    bit_and, fetch_bit_and,
    bit_or, fetch_bit_or,
    bit_xor, fetch_bit_xor,
    inc, fetch_inc,
    dec, fetch_dec
};
```

```
2 template<typename T>
   class atomic_domain;
```

- <sup>3</sup> *C++ Concepts: MoveConstructible, Destructible*

```
4 template<typename T>
  atomic_domain<T>::atomic_domain(std::vector<atomic_op> const &ops,
                                  team &team = world());
```

5 *This function is collective (§12.1) over the given team, and it must be called by the thread that has the master persona (§10.5.1).*

6 *Precondition:* T must be one of the approved atomic types: `std::int32_t`, `std::uint32_t`, `std::int64_t`, `std::uint64_t`, `float`, or `double`. T must be a permitted type for each of the operations in `ops`.

7 Constructs an atomic domain for type T, with supported operations `ops`. This instance acts as the calling process's representative in the resulting atomic domain.

8 *UPC++ progress level:* `internal`

```
9 template<typename T>
  atomic_domain<T>::atomic_domain(atomic_domain &&other);
```

10 *Precondition:* Calling thread must have the master persona.

11 Makes this instance the calling process's representative of the atomic domain associated with `other`, transferring all state from `other`. Invalidates `other`, and any subsequent operations on `other`, except for move construction or destruction, produce undefined behavior.

12 *UPC++ progress level:* `none`

```
13 template<typename T>
  void atomic_domain<T>::destroy(entry_barrier lev =
                                  entry_barrier::user);
```

14 *This function is collective (§12.1) over the team associated with this atomic domain, and it must be called by the thread that has the master persona (§10.5.1).*

15 *Precondition:* This instance must be the process's representative of the atomic domain. `lev` must be single-valued (Ch. 12). After the entry barrier specified by `lev` completes, or upon entry if `lev == entry_barrier::none`, all operations on this atomic domain must have signaled operation completion.

16 Destroys the calling process's state associated with the atomic domain. Subsequent operations on this `atomic_domain`, other than move construction or destruction, produce undefined behavior.

17 *C++ memory ordering:* If `lev != entry_barrier::none`, with respect to all threads participating in this collective, all evaluations which are *sequenced-before* their respective thread's invocation of this call will have a *happens-before* relationship with all evaluations sequenced after the call.

18 *UPC++ progress level:* `user` if `lev == entry_barrier::user`,  
`internal` otherwise

19 `template<typename T>`  
`atomic_domain<T>::~atomic_domain();`

20 *Precondition:* Either UPC++ must have been uninitialized since this domain's creation, or the `atomic_domain` must either have had `destroy()` called on it or been invalidated by being passed to the move constructor.

21 Destroys this `atomic_domain` object.

22 *This function may be called when UPC++ is in the uninitialized state.*

23 *UPC++ progress level:* `none`

24 `template<typename T>`  
`template<typename Completions=decltype(operation_cx::as_future())>`  
`RType atomic_domain<T>::load(global_ptr<T> p,`  
`std::memory_order order,`  
`Completions cxs=Completions{});`

25 *Precondition:* `T` must be the only type used by any atomic referencing any part of `p`'s target memory for the entire lifetime of UPC++. `order` must be `std::memory_order_relaxed` or `std::memory_order_acquire`. The `atomic_op::load` operation must have been included in the `ops` used to construct this `atomic_domain`. The team associated with this domain must not have been destroyed.

26 Initiates an atomic read of the object at location `p` and produces its value as part of operation completion.

*Completions:*

- 27       • *Operation:* Indicates completion of all aspects of the operation: the remote atomic read and transfer of the result are complete. This completion produces a value of type T.

28       *C++ memory ordering:* If `order` is `std::memory_order_acquire` then the read performed will have a *happens-before* relationship with the operation-completion notification actions (future readying, promise fulfillment, or persona LPC enlistment).

29       *UPC++ progress level:* `internal`

```
30 template<typename T>
   template<typename Completions=decltype(operation_cx::as_future())>
   RType atomic_domain<T>::store(global_ptr<T> p, T val,
                                std::memory_order order,
                                Completions cxs=Completions{});
```

31       *Precondition:* T must be the only type used by any atomic referencing any part of p's target memory for the entire lifetime of UPC++. `order` must be `std::memory_order_relaxed` or `std::memory_order_release`. The `atomic_op::store` operation must have been included in the `ops` used to construct this `atomic_domain`. The team associated with this domain must not have been destroyed.

32       Initiates an atomic write of `val` to the location `p`. Completion of the write is indicated by operation completion.

*Completions:*

- 33       • *Operation:* Indicates completion of all aspects of the operation: the transfer of the value and remote atomic write are complete.

34       *C++ memory ordering:* If `order` is `std::memory_order_release` then all evaluations *sequenced-before* this call will have a *happens-before* relationship with the write performed. The write performed will have a *happens-before* relationship with the operation-completion notification actions (future readying, promise fulfillment, or persona LPC enlistment).

35       *UPC++ progress level:* `internal`

```
36 template<typename T>
template<typename Completions=decltype(operation_cx::as_future())>
RType atomic_domain<T>::compare_exchange(
    global_ptr<T> p, T val1, T val2,
    std::memory_order order,
    Completions cxs=Completions{});
```

37 *Precondition:* T must be the only type used by any atomic referencing any part of p's target memory for the entire lifetime of UPC++. `order` must be `std::memory_order_relaxed`, `std::memory_order_acquire`, `std::memory_order_release`, or `std::memory_order_acq_rel`. The ops used to construct this `atomic_domain` must have included the `atomic_op::compare_exchange` operation. The team associated with this domain must not have been destroyed.

38 Initiates the atomic read-modify-write operation consisting of: reading the value of the object located at `p`, and if it is equal to `val1`, writing `val2` back. The value produced by operation completion is the one initially read.

*Completions:*

39 

- *Operation:* Indicates completion of all aspects of the operation: the transfer of the given value to the recipient, remote atomic update, and transfer of the old value to the initiator are complete. This completion produces a value of type T.

40 *C++ memory ordering:* If `order` is either `std::memory_order_release` or `std::memory_order_acq_rel` then all evaluations *sequenced-before* this call will have a *happens-before* relationship with the atomic action. If `order` is `std::memory_order_acquire` or `std::memory_order_acq_rel` then the atomic action will have a *happens-before* relationship with the operation-completion notification actions (future readying, promise fulfillment, or LPC enlistment).

41 *UPC++ progress level:* **internal**

```
42 template<typename T>
template<typename Completions=decltype(operation_cx::as_future())>
RType atomic_domain<T>::binary_key(global_ptr<T> p, T val,
    std::memory_order order,
    Completions cxs=Completions{});

template<typename T>
template<typename Completions=decltype(operation_cx::as_future())>
RType atomic_domain<T>::fetch_binary_key(global_ptr<T> p, T val,
    std::memory_order order,
    Completions cxs=Completions{});
```

```

template<typename T>
template<typename Completions=decltype(operation_cx::as_future())>
RType atomic_domain<T>::unary_key(global_ptr<T> p,
                                std::memory_order order,
                                Completions cxs=Completions{});

template<typename T>
template<typename Completions=decltype(operation_cx::as_future())>
RType atomic_domain<T>::fetch_unary_key(global_ptr<T> p,
                                       std::memory_order order,
                                       Completions cxs=Completions{});

```

43 *Precondition:* T must be the only type used by any atomic referencing any part of p's target memory for the entire lifetime of UPC++, and it must be one of the permitted types for the operation. order must be std::memory\_order\_relaxed, std::memory\_order\_acquire, std::memory\_order\_release, or std::memory\_order\_acq\_rel. The atomic\_op::op operation must have been included in the ops used to construct this atomic\_domain, where op is the following for each variant, respectively: *binary\_key*, *fetch\_binary\_key*, *unary\_key*, *fetch\_unary\_key*. The team associated with this domain must not have been destroyed.

44 Initiates the atomic read-modify-write operation consisting of: reading the value of the object located at p, performing the operation corresponding to *binary\_key* or *unary\_key*, and writing the new value back. For binary operations, the operation is performed on the value initially read and the val argument. For unary operations, the operation is performed on the value initially read. In the fetch variants, the value initially read is produced by operation completion.

45 The correspondence between *binary\_key*, its respective arithmetic operation, and the permitted types is as in Table 13.1. All operations support the integral types std::int32\_t, std::uint32\_t, std::int64\_t, and std::uint64\_t.

46 The correspondence between *unary\_key*, its respective arithmetic operation, and the permitted types is as in Table 13.2. All operations support the integral types std::int32\_t, std::uint32\_t, std::int64\_t, and std::uint64\_t.

#### *Completions:*

- 47
- *Operation:* Indicates completion of all aspects of the operation: the transfer of the given value to the recipient and remote atomic update, and

transfer of the old value to the initiator in the fetch variants, are complete. This completion does not produce a value in the non-fetch variants and produces a value of type T in the fetch variants.

48 *C++ memory ordering:* If `order` is either `std::memory_order_release` or `std::memory_order_acq_rel` then all evaluations *sequenced-before* this call will have a *happens-before* relationship with the atomic action. If `order` is `std::memory_order_acquire` or `std::memory_order_acq_rel` then the atomic action will have a *happens-before* relationship with the operation-completion notification actions (future readying, promise fulfillment, or persona LPC enlistment).

49 *UPC++ progress level:* `internal`

<i>binary_key</i>	<b>Computation</b>	Supports float and double
<code>add</code>	<code>+</code>	yes
<code>sub</code>	<code>-</code>	yes
<code>mul</code>	<code>*</code>	yes
<code>min</code>	<code>std::min</code>	yes
<code>max</code>	<code>std::max</code>	yes
<code>bit_and</code>	<code>&amp;</code>	no
<code>bit_or</code>	<code> </code>	no
<code>bit_xor</code>	<code>^</code>	no

Table 13.1: Binary atomic arithmetic computations

<i>unary_key</i>	<b>Computation</b>	Supports float and double
<code>inc</code>	<code>++</code>	yes
<code>dec</code>	<code>--</code>	yes

Table 13.2: Unary atomic arithmetic computations



# Chapter 14

## Distributed Objects

### 14.1 Overview

<sup>1</sup> In distributed-memory parallel programming, the concept of a single logical object partitioned over several processes is a useful capability in many contexts: for example, geometric meshes, vectors, matrices, tensors, and associative maps. Since `UPC++` is a communication library, it strives to focus on the mechanisms of communication as opposed to the various programming idioms for managing distribution. However, a basic framework for users to implement their own distributed objects is useful and also enables `UPC++` to provide the user with the following valuable features:

1. Universal distributed object naming: per-object names that can be transmitted to other processes while retaining their meaning.
2. Name-to-this mapping: Mapping between the universal name and the calling process's memory address holding that distributed object's state for the process (the calling process's `this` pointer).

<sup>2</sup> The need for universal distributed object naming stems primarily from `RPC`-based communication. If one process needs to remotely invoke code on a peer's partition of a distributed object, there needs to be some mutually agreeable identifier for referring to that distributed object. For simplicity, this identifier value should be: identical across all processes so that it may be freely communicated while maintaining its meaning. Moreover, the name should be `TriviallyCopyable` so that it may be serialized into `RPCs` efficiently (including with the auto-capture `[=]` lambda syntax), hashable, and comparable so that it works well with standard `C++` containers. `UPC++` provides distributed object names meeting these criteria

as well as the registry for mapping names to and from the calling process's partition of the distributed object.

## 14.2 Building Distributed Objects

- <sup>1</sup> Distributed objects are built with the `upcxx::dist_object<T>` constructor over a specific `team` (defaulting to `team world()`). For all processes in the given team, each process constructs an instance of `dist_object<T>`, supplying a value of type `T` representing this process's instance value. All processes in the team must call this constructor collectively. Once construction completes, the distributed object has a universal name which can be used by any rank in the team to locate the resident instance. When the `dist_object<T>` is destructed the `T` value is also destructed. At this point the name will cease to carry meaning on this process. Thus, the programmer should ensure that no process destructs a distributed object until all name lookups destined for it complete and all hanging references of the form `T&` or `T*` to the value have expired.
- <sup>2</sup> The names of `dist_object<T>`'s are encoded by the `dist_id<T>` type. This type is `TriviallyCopyable`, `EqualityComparable`, `LessThanComparable`, `hashable`, and `DefinitelyTriviallySerializable`. It has the members `.here()` and `.when_here()` for retrieving the resident `dist_object<T>` instance registered with the name.

## 14.3 Ensuring Distributed Existence

- <sup>1</sup> The `dist_object<T>` constructor requires it be called in a collective context, but it does not guarantee that, after the call, all other ranks in the team have exited or even reached the constructor. Thus users are required to guard against the possibility that when an `RPC` carrying an distributed object's name executes, the recipient process may not yet have an entry for that name in its registry. Possible ways to deal with this include:
  1. Barrier: Before issuing communication containing a `dist_id<T>` for a newly created distributed object, the relevant team completes a `barrier` to ensure global existence of the `dist_object<T>`.
  2. Point to point: Before communicating a `dist_id<T>` with a given process, the initiating process uses some two-party protocol to ensure that the peer has constructed the `dist_object<T>`.

3. Asynchronous point-to-point: The user performs no synchronization to ensure remote existence. Instead, an RPC is sent which, upon arrival, must wait asynchronously via a continuation for the peer to construct the distributed object.
- 2 UPC++ enables the asynchronous point-to-point approach implicitly when `dist_object<T>&` arguments are given to any of the RPC family of functions (see Ch. 9).

## 14.4 API Reference

```
1 template<typename T>
  class dist_object;
```

2 *C++ Concepts: MoveConstructible, Destructible*

```
3 template<typename T>
  dist_object<T>::dist_object(T value, team &team = world());
```

4 *This function is collective (§12.1) over the given team, and it must be called by the thread that has the master persona (§10.5.1).*

5 Constructs this process's member of the distributed object identified by the collective calling context across `team`. The initial value for this process is given in `value`. The future returned from `dist_id<T>::when_here` for the corresponding `dist_id<T>` will be readied during this constructor. This implies that continuations waiting for that future will execute before the constructor returns.

6 *UPC++ progress level: none*

```
7 template<typename T>
  template<typename ...Arg>
  dist_object<T>::dist_object(team &team, Arg &&...arg);
```

8 *This function is collective (§12.1) over the given team, and it must be called by the thread that has the master persona (§10.5.1).*

9 Constructs this process's member of the distributed object identified by the collective calling context across `team`. The initial value for this process is constructed with `T(std::forward<Arg>(arg)...) . . .`. The result is undefined if this call throws an exception. The future returned from `dist_id<T>::when_here` for the corresponding `dist_id<T>` will be readied during this constructor. This

implies that continuations waiting for that future will execute before the constructor returns.

10 *UPC++ progress level: none*

```
11 template<typename T>  
    dist_object<T>::dist_object(dist_object<T> &&other);
```

12 *Precondition:* Calling thread must have the master persona.

13 Makes this instance the calling process's representative of the distributed object associated with **other**, transferring all state from **other**. Invalidates **other**, and any subsequent operations on **other**, except for destruction, produce undefined behavior.

14 *UPC++ progress level: none*

```
15 template<typename T>  
    dist_object<T>::~dist_object();
```

16 *Precondition:* Calling thread must have the master persona.

17 If this instance has not been invalidated by being passed to the move constructor, then this will destroy the calling process's member of the distributed object. `~T()` will be invoked on the resident instance, and further lookups on this process using the `dist_id<T>` corresponding to this distributed object will have undefined behavior. If this instance has been invalidated by a move, then this call will have no effect.

18 *UPC++ progress level: none*

```
19 template<typename T>  
    dist_id<T> dist_object<T>::id() const;
```

20 Returns the `dist_id<T>` representing the universal name of this distributed object.

21 *UPC++ progress level: none*

```
22 template<typename T>
    team& dist_object<T>::team() const;
```

23 *Precondition:* The `team` associated with this distributed object must not have been destroyed.

24 Retrieves a reference to the `team` instance associated with this distributed object.

25 *UPC++ progress level: none*

```
26 template<typename T>
    T* dist_object<T>::operator->() const;
```

27 Access to the calling process's value instance for this distributed object.

28 *UPC++ progress level: none*

```
29 template<typename T>
    T& dist_object<T>::operator*() const;
```

30 Access to the calling process's value instance for this distributed object.

31 *UPC++ progress level: none*

```
32 template<typename T>
    future<T> dist_object<T>::fetch(intrank_t rank) const;
```

33 *Precondition:* `rank` must be a valid ID in the team associated with this distributed object. `T` must be `DefinitelySerializable` but not `view<U, IterType>`. `rank`'s instance of this distributed object must not have been destroyed by the owning process. The `team` associated with this distributed object must not have been destroyed.

34 Asynchronously retrieves a copy of the instance of this distributed object associated with the peer index `rank` in this distributed object's team. The result is encapsulated in the returned future. This call is equivalent to:

```
35     rpc(team()[rank],
        [] (dist_object<T> &obj) { return *obj; },
        *this)
```

36 *UPC++ progress level: internal*

```
37 template<typename T>  
   struct dist_id<T>;
```

38     *C++ Concepts:* DefaultConstructible, TriviallyCopyable, StandardLayoutType,  
 EqualityComparable, LessThanComparable, hashable

39     *UPC++ Concepts:* DefinitelyTriviallySerializable

```
40 template<typename T>  
   dist_id<T>::dist_id();
```

41     Initializes this name to be an invalid ID.

42     *UPC++ progress level:* none

```
43 template<typename T>  
   future<dist_object<T>&&> dist_id<T>::when_here() const;
```

44     *Precondition:* This name must be a valid ID for the calling process. The  
 `dist_object<T>` instance owned by the calling process that is associated with  
 this name must not have been destroyed. The calling thread must have the  
 master persona.

45     Retrieves a future representing when the calling process constructs the  
 `dist_object<T>` corresponding to this name.

46     *UPC++ progress level:* none

```
47 template<typename T>  
   dist_object<T>& dist_id<T>::here() const;
```

48     *Precondition:* This name must be a valid ID for the calling process. The  
 `dist_object<T>` instance owned by the calling process that is associated with  
 this name must have been previously constructed but not yet destroyed. The  
 calling thread must have the master persona.

49     Retrieves a reference to the calling process's `dist_object<T>` instance associ-  
 ated with this name.

50     *UPC++ progress level:* none

# Chapter 15

## Non-Contiguous One-Sided Communication

### 15.1 Overview

- <sup>1</sup> UPC++ provides functions to perform one-sided communications similar to `rget` and `rput` which are dedicated to handle data stored in non-contiguous locations. These functions are denoted with a suffix added to the type of operation, in increasing order of specialization:
- <sup>2</sup> `{rput,rget}_{irregular,regular,strided}`
- <sup>3</sup> The most general variant of the API, `{rput,rget}_irregular`, accept iterators over an array or collection of `std::pair` (or `std::tuple`) that contain a local or global pointer to a memory location in the first member while the second member contains the size of the contiguous chunk of memory to be transferred. This variant is capable of expressing non-contiguous RMA of arbitrary shape, but pays the highest overhead in metadata to payload ratio.
- <sup>4</sup> The next set of functions, `{rput,rget}_regular`, operates over contiguous elements of identical size on each side of the transfer, and only requires the caller to provide an array or collection of base pointers to each element.
- <sup>5</sup> Finally, the most specialized set of functions, `{rput,rget}_strided`, provide an interface for expressing translational and transposing copies between arbitrary rectangular sections of densely stored N-dimensional arrays. This specialized pattern requires the least metadata, which is constant in size for a given dimensionality. An example of such a transfer is depicted in Figure 15.1.

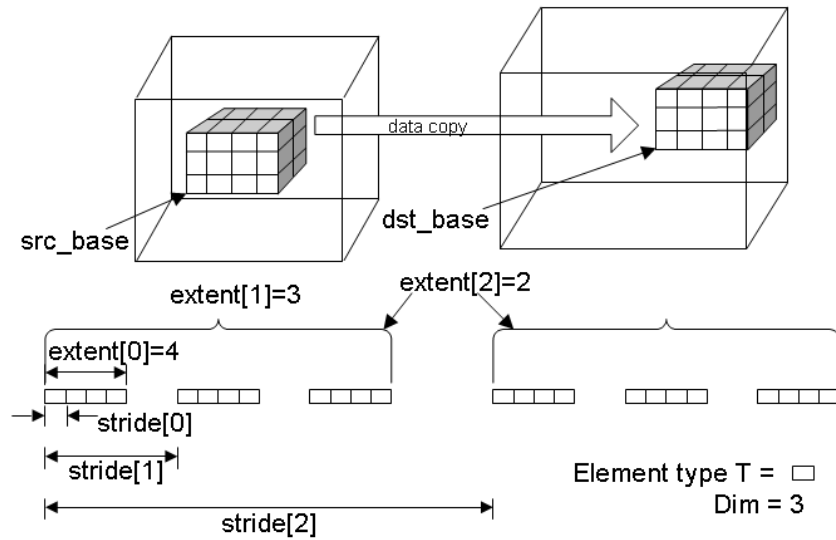


Figure 15.1: Example of a 3-D strided translational copy, with associated metadata

## 15.2 API Reference

### 15.2.1 Requirements on Iterators

- 1 An iterator used with a UPC++ operation in this section must adhere to the following requirements:
  - 2 • It must satisfy the Iterator and EqualityComparable C++ concepts.
  - 3 • Calling `std::distance` on the iterator must not invalidate it.

### 15.2.2 Irregular Put

```

1 template<typename SrcIter, typename DestIter,
           typename Completions=decltype(operation_cx::as_future())>
RType rput_irregular(
    SrcIter src_runs_begin, SrcIter src_runs_end,
    DestIter dest_runs_begin, DestIter dest_runs_end,
    Completions cxs=Completions{});

```

*Preconditions:*



- 2       • `SrcIter` and `DestIter` both satisfy the iterator requirements above.
- 3       • `std::get<0>(*std::declval<SrcIter>())` has a return type convertible  
to `T const*`, for some `DefinitelyTriviallySerializable` type `T`.
- 4       • `std::get<1>(*std::declval<SrcIter>())` has a return type convertible  
to `std::size_t`.
- 5       • `std::get<0>(*std::declval<DestIter>())` has the return type  
`global_ptr<T>`, for the same type `T` as with `SrcIter`.
- 6       • `std::get<1>(*std::declval<DestIter>())` has a return type convert-  
ible to `std::size_t`.
- 7       • All destination addresses must be `global_ptr<T>`'s referencing memory  
with affinity to the same process.
- 8       • The length of the expanded address sequence (the sum over the run  
lengths) must be the same for the source and destination sequences.
- 9       • The source and destination addresses must not be null pointers, even if  
the length of a run is zero.

10      For some type `T`, takes a sequence of source addresses of `T const*` and a se-  
quence of destination addresses of `global_ptr<T>` and does the corresponding  
puts from each source address to the destination address of the same sequence  
position.

11      Address sequences are encoded in run-length form as sequences of runs, where  
each run is a pair consisting of a starting address plus the number of consecutive  
elements of type `T` beginning at that address.

12      As an example of valid types for individual runs, `SrcIter` could be an iterator  
over elements of type `std::pair<T const*, std::size_t>`, and `DestIter` an  
iterator over `std::pair<global_ptr<T>, std::size_t>`. Variations replac-  
ing `std::pair` with `std::tuple` or `size_t` with other primitive integral types  
are also valid.

13      The source sequence iterators must remain valid, and the underlying addresses  
and source memory contents must not be modified until source completion  
is signaled. Only after source completion is signaled can the source address  
sequences and memory be reclaimed by the application.

14      The destination sequence iterators must remain valid until source completion  
is signaled.

15 The destination memory regions must be completely disjoint and must not overlap with any source memory regions, otherwise behavior is undefined. Source regions are permitted to overlap with each other.

16 Remote-completion operations execute on the master persona of the process associated with the destination (i.e. `dest_runs_begin->where()`), unless the destination sequence is empty (i.e. `dest_runs_begin == dest_runs_end`), in which case they run on the master persona of the initiating process.

*Completions:*

17

- *Source:* Indicates that the source sequence iterators and underlying memory, as well as the destination sequence iterators, are no longer in use by UPC++ and may be reclaimed by the user.

18

- *Remote:* Indicates completion of the transfer of all values.

19

- *Operation:* Indicates completion of all aspects of the operation: the transfer and remote stores are complete.

20 *C++ memory ordering:* The reads of the sources will have a *happens-before* relationship with the source-completion notification actions (future readying, promise fulfillment, or persona LPC enlistment). The writes to the destinations will have a *happens-before* relationship with the operation-completion notification actions (future readying, promise fulfillment, or persona LPC enlistment) and remote-completion actions (RPC enlistment). For LPC and RPC completions, all evaluations *sequenced-before* this call will have a *happens-before* relationship with the execution of the completion function.

21 *UPC++ progress level:* **internal**

### 15.2.3 Irregular Get

```
1 template<typename SrcIter, typename DestIter,
   typename Completions=decltype(operation_cx::as_future())>
RType rget_irregular(
    SrcIter src_runs_begin, SrcIter src_runs_end,
    DestIter dest_runs_begin, DestIter dest_runs_end,
    Completions cxs=Completions{});
```

*Preconditions:*

2

- `SrcIter` and `DestIter` both satisfy the iterator requirements above.

- 3       • `std::get<0>(*std::declval<SrcIter>())` has the type `global_ptr<T>` for some `DefinitelyTriviallySerializable` type `T`.
- 4       • `std::get<1>(*std::declval<SrcIter>())` has a type that is convertible to `std::size_t`.
- 5       • `std::get<0>(*std::declval<DestIter>())` has the type `T*`, for the same type `T` as with `SrcIter`.
- 6       • `std::get<1>(*std::declval<DestIter>())` has a type that is convertible to `std::size_t`.
- 7       • All source addresses must be `global_ptr<T>`'s referencing memory with affinity to the same process.
- 8       • The length of the expanded address sequence (the sum over the run lengths) must be the same for the source and destination sequences.
- 9       • The source and destination addresses must not be null pointers, even if the length of a run is zero.

10       For some type `T`, takes a sequence of source addresses of `global_ptr<T>` and a sequence of destination addresses of `T*` and does the corresponding gets from each source address to the destination address of the same sequence position.

11       Address sequences are encoded in run-length form as sequences of runs, where each run is a pair consisting of a starting address plus the number of consecutive elements of type `T` beginning at that address.

12       As an example of valid types for individual runs, `DestIter` could be an iterator over elements of type `std::pair<T*, std::size_t>`, and `SrcIter` an iterator over `std::pair<global_ptr<T>, std::size_t>`. Variations replacing `std::pair` with `std::tuple` or `size_t` with other primitive integral types are also valid.

13       The source sequence iterators must remain valid, and the underlying addresses and memory contents must not be modified until operation completion is signaled. Only after operation completion is signaled can the address sequences and source memory be reclaimed by the application.

14       The destination sequence iterators must remain valid until operation completion is signaled.

15       The destination memory regions must be completely disjoint and must not overlap with any source memory regions, otherwise behavior is undefined. Source regions are permitted to overlap with each other.

*Completions:*

- 16       • *Operation*: Indicates completion of all aspects of the operation: the transfer and local stores are complete.
- 17       *C++ memory ordering*: The reads of the sources and writes to the destinations will have a *happens-before* relationship with the operation-completion notification actions (future readying, promise fulfillment, or persona LPC enlistment). For LPC completions, all evaluations *sequenced-before* this call will have a *happens-before* relationship with the execution of the completion function.
- 18       *UPC++ progress level*: **internal**

## 15.2.4 Regular Put

```
1  template<typename SrcIter, typename DestIter,
      typename Completions=decltype(operation_cx::as_future())>
RType rput_regular(
    SrcIter src_runs_begin, SrcIter src_runs_end,
    std::size_t src_run_length,
    DestIter dest_runs_begin, DestIter dest_runs_end,
    std::size_t dest_run_length,
    Completions cxs=Completions{});
```

*Preconditions:*

- 2       • SrcIter and DestIter both satisfy the iterator requirements above.
- 3       • \*std::declval<SrcIter>() has a type convertible to T const\*, for some DefinitelyTriviallySerializable type T.
- 4       • \*std::declval<DestIter>() has the type global\_ptr<T>, for the same type T as with SrcIter.
- 5       • All destination addresses must be global\_ptr<T>'s referencing memory with affinity to the same process.
- 6       • The length of the two sequences delimited by (src\_runs\_begin, src\_runs\_end) and (dest\_runs\_begin, dest\_runs\_end) multiplied by src\_run\_length and dest\_run\_length, respectively, must be the same.
- 7       • The source and destination addresses must not be null pointers, even if src\_run\_length and dest\_run\_length are zero.

8 This call has the same semantics as `rput_irregular` with the exception that, for each sequence, all run lengths are the same and are factored out of the sequences into two extra parameters `src_run_length` and `dest_run_length`, which express the number of consecutive elements of type `T` in units of element count. Thus the iterated elements are no longer pairs, but just pointers.

9 The source sequence iterators must remain valid, and the underlying addresses and source memory contents must not be modified until source completion is signaled. Only after source completion is signaled can the source address sequences and memory be reclaimed by the application.

10 The destination sequence iterators must remain valid until source completion is signaled.

11 Remote-completion operations execute on the master persona of the process associated with the destination (i.e. `dest_runs_begin->where()`), unless the destination sequence is empty (i.e. `dest_runs_begin == dest_runs_end`), in which case they run on the master persona of the initiating process.

*Completions:*

12 

- *Source:* Indicates that the source sequence iterators and underlying memory, as well as the destination sequence iterators, are no longer in use by UPC++ and may be reclaimed by the user.

13 

- *Remote:* Indicates completion of the transfer of all values.

14 

- *Operation:* Indicates completion of all aspects of the operation: the transfer and remote stores are complete.

15 *C++ memory ordering:* The reads of the sources will have a *happens-before* relationship with the source-completion notification actions (future readying, promise fulfillment, or persona LPC enlistment). The writes to the destinations will have a *happens-before* relationship with the operation-completion notification actions (future readying, promise fulfillment, or persona LPC enlistment) and remote-completion actions (RPC enlistment). For LPC and RPC completions, all evaluations *sequenced-before* this call will have a *happens-before* relationship with the execution of the completion function.

16 *UPC++ progress level:* **internal**

### 15.2.5 Regular Get

```
1 template<typename SrcIter, typename DestIter,
           typename Completions=decltype(operation_cx::as_future())>
RType rget_regular(
    SrcIter src_runs_begin, SrcIter src_runs_end,
    std::size_t src_run_length,
    DestIter dest_runs_begin, DestIter dest_runs_end,
    std::size_t dest_run_length,
    Completions cxs=Completions{});
```

*Preconditions:*

- 2     • SrcIter and DestIter both satisfy the iterator requirements above.
  - 3     • \*std::declval<DestIter>() has a type convertible to T\*, for some DefinitelyTriviallySerializable type T.
  - 4     • \*std::declval<SrcIter>() has the type global\_ptr<T>, for the same type T as with DestIter.
  - 5     • All source addresses must be global\_ptr<T>'s referencing memory with affinity to the same process.
  - 6     • The length of the two sequences delimited by (src\_runs\_begin, src\_runs\_end) and (dest\_runs\_begin, dest\_runs\_end) multiplied by src\_run\_length and dest\_run\_length, respectively, must be the same.
  - 7     • The source and destination addresses must not be null pointers, even if src\_run\_length and dest\_run\_length are zero.
- 8     This call has the same semantics as rget\_irregular with the exception that, for each sequence, all run lengths are the same and are factored out of the sequences into two extra parameters src\_run\_length and dest\_run\_length, which express the number of consecutive elements of type T in units of element count. Thus, the iterated elements are no longer pairs, but just pointers.
- 9     The source sequence iterators must remain valid, and the underlying addresses and memory contents must not be modified until operation completion is signaled. Only after operation completion is signaled can the address sequences and source memory be reclaimed by the application.
- 10    The destination sequence iterators must remain valid until operation completion is signaled.

*Completions:*

- 11       • *Operation:* Indicates completion of all aspects of the operation: the transfer and local stores are complete.
- 12       *C++ memory ordering:* The reads of the sources and writes to the destinations will have a *happens-before* relationship with the operation-completion notification actions (future readying, promise fulfillment, or persona LPC enlistment). For LPC completions, all evaluations *sequenced-before* this call will have a *happens-before* relationship with the execution of the completion function.
- 13       *UPC++ progress level:* `internal`

## 15.2.6 Strided Put

```
1 template<std::size_t Dim, typename T,
      typename Completions=decltype(operation_cx::as_future())>
RType rput_strided(
    T const *src_base,
    std::ptrdiff_t const *src_strides,
    global_ptr<T> dest_base,
    std::ptrdiff_t const *dest_strides,
    std::size_t const *extents,
    Completions cxs=Completions{});
```

```
template<std::size_t Dim, typename T,
      typename Completions=decltype(operation_cx::as_future())>
RType rput_strided(
    T const *src_base,
    std::array<std::ptrdiff_t,Dim> const &src_strides,
    global_ptr<T> dest_base,
    std::array<std::ptrdiff_t,Dim> const &dest_strides,
    std::array<std::size_t,Dim> const &extents,
    Completions cxs=Completions{});
```

- 2       *Precondition:* T must be a DefinitelyTriviallySerializable type. `src_base` and `dest_base` must not be null pointers, even if the number of bytes to be transferred is zero.
- 3       If `Dim == 0`, `src_strides`, `dest_strides`, and `extents` are ignored, and the data movement performed is equivalent to `rput(src_base, dest_base, 1)`.

4 Otherwise, performs the semantic equivalent of many put's of type T. Let the *index space* be the set of integer vectors of dimension Dim contained in the bounding box with the inclusive lower bound at the all-zero origin, and the exclusive upper bound equal to `extents`. For each index vector `index` in this index space, a put will be executed with source and destination addresses computed according to the following pseudo-code, where `dotprod` is the vector dot product and pointer arithmetic is done in units of bytes (not elements of  $\hat{T}$ ):

```
5 src_address = src_base + dotprod(index, src_strides)  
6 dest_address = dest_base + dotprod(index, dest_strides)
```

6 Note this implies the elements of the `src_strides` and `dest_strides` arrays are expressed in units of bytes.

7 The destination memory regions must be completely disjoint and must not overlap with any source memory regions, otherwise behavior is undefined. Source regions are permitted to overlap with each other.

8 The elements of type T residing in the source addresses must remain valid and unmodified until source completion is signaled.

9 The contents of the `src_strides`, `dest_strides`, and `extents` arrays are consumed synchronously before the call returns.

10 Remote-completion operations execute on the master persona of the process associated with the destination (i.e. `dest_base.where()`).

#### *Completions:*

11 

- *Source*: Indicates that the source memory is no longer in use by UPC++ and may be reclaimed by the user.

12 

- *Remote*: Indicates completion of the transfer of all values.

13 

- *Operation*: Indicates completion of all aspects of the operation: the transfer and remote stores are complete.

14 *C++ memory ordering*: The reads of the sources will have a *happens-before* relationship with the source-completion notification actions (future readying, promise fulfillment, or persona LPC enlistment). The writes to the destinations will have a *happens-before* relationship with the operation-completion notification actions (future readying, promise fulfillment, or persona LPC enlistment)



and remote-completion actions (RPC enlistment). For LPC and RPC completions, all evaluations *sequenced-before* this call will have a *happens-before* relationship with the execution of the completion function.

15 *UPC++ progress level: internal*

## 15.2.7 Strided Get

```
1 template<std::size_t Dim, typename T,
           typename Completions=decltype(operation_cx::as_future())>
RType rget_strided(
    global_ptr<T> src_base,
    std::ptrdiff_t const *src_strides,
    T *dest_base,
    std::ptrdiff_t const *dest_strides,
    std::size_t const *extents,
    Completions cxs=Completions{});
```

```
template<std::size_t Dim, typename T,
           typename Completions=decltype(operation_cx::as_future())>
RType rget_strided(
    global_ptr<T> src_base,
    std::array<std::ptrdiff_t,Dim> const &src_strides,
    T *dest_base,
    std::array<std::ptrdiff_t,Dim> const &dest_strides,
    std::array<std::size_t,Dim> const &extents,
    Completions cxs=Completions{});
```

2 *Precondition:* T must be a DefinitelyTriviallySerializable type. `src_base` and `dest_base` must not be null pointers, even if the number of bytes to be transferred is zero.

3 If `Dim == 0`, `src_strides`, `dest_strides`, and `extents` are ignored, and the data movement performed is equivalent to `rget(src_base, dest_base, 1)`.

4 Otherwise, performs the reverse direction of `rput_strided` where now the source memory is remote and the destination is local.

5 The destination memory regions must be completely disjoint and must not overlap with any source memory regions, otherwise behavior is undefined. Source regions are permitted to overlap with each other.

6 The elements of type `T` residing in the source addresses must remain valid and unmodified until operation completion is signaled.

7 The contents of the `src_strides`, `dest_strides`, and `extents` arrays are consumed synchronously before the call returns.

*Completions:*

8 

- *Operation:* Indicates completion of all aspects of the operation: the transfer and local stores are complete.

9 *C++ memory ordering:* The reads of the sources and writes to the destinations will have a *happens-before* relationship with the operation-completion notification actions (future readying, promise fulfillment, or persona LPC enlistment). For LPC completions, all evaluations *sequenced-before* this call will have a *happens-before* relationship with the execution of the completion function.

10 *UPC++ progress level:* **internal**

# Chapter 16

## Memory Kinds

### 16.1 Overview

- <sup>1</sup> The memory kinds interface enables the programmer to identify regions of memory requiring different access methods or having different performance properties, and subsequently rely on the UPC++ communication services to perform transfers among such regions (both local and remote) in a manner transparent to the programmer. With GPU devices, HBM, scratch-pad memories, NVRAM and various types of storage-class and fabric-attached memory technologies featured in vendors' public road maps, UPC++ must be prepared to deal efficiently with data transfers among all the memory technologies in any given system.
- <sup>2</sup> UPC++ uses *device* objects to represent storage that is distinct from main memory, regardless of whether the storage is directly addressable from the host process. Each kind of memory has its own device type; for example, a CUDA-enabled GPU device is represented by a `cuda_device` object. The device type has a member type-alias template `pointer` that refers to the device's pointer type, as well as a `null_pointer` member-function template that returns a null-pointer value of that type. Each device type is associated with a `memory_kind` constant, and global pointers are parameterized by a `memory_kind` (Ch. 3).
- <sup>3</sup> Creating active device objects is a collective operation over the world team so that UPC++ can allocate the resources required to support remote access to device memory. The result is a semantic binding of device objects as a collective object, which we refer to as a *collective device*. A device type also provides a mechanism for constructing inactive device objects, so that processes without a device resource can still participate in the collective device-creation operation. A collective device must be destroyed by collectively calling the

`destroy()` member function, which releases the resources associated with the collective device.

```
1  cuda_device::id_type device_id =
2      rank_me() % 2 == 0 ? 0 : cuda_device::invalid_device_id;
3  cuda_device gpu_device(device_id); // device 0 on even processes
4  ...
5  gpu_device.destroy(); // collective destroy
```

- 4 A device object can be associated with a `device_allocator` that manages memory on the device. Only one `device_allocator` may be associated with a particular device object. The region of memory that a `device_allocator` manages is called a *device segment*. Users can either create their own segments and pass them to the `device_allocator` constructor, or they can request that the `device_allocator` allocate its own segment. In the latter case, the segment is automatically freed when the `device_allocator` is destroyed.

```
1  std::size_t seg_size = 4*1024*1024; // 4MB
2  device_allocator<cuda_device> gpu_alloc(gpu_device, seg_size);
3  global_ptr<double, memory_kind::cuda_device> gpu_array =
4      gpu_alloc.allocate<double>(1024);
5  ...
6  gpu_alloc.deallocate(gpu_array);
```

- 5 We define the affinity (Ch. 3) of memory allocated by a `device_allocator` to be the host process that owns the allocator and its associated device.
- 6 The device types defined in this section are available to UPC++ programs even in UPC++ installations that are not aware of a particular kind of device. For example, a program may create `cuda_device` objects. However, there are no valid CUDA device IDs in a non-CUDA-aware installation, so any `cuda_device` object created by the program will be inactive.
- 7 The `copy` functions transfer data between memory locations of any kind. The source and destination locations may either be local or remote, and they may refer to either host or device memory.

```
1  global_ptr<double> host_array = new_array<double>(1024);
2  global_ptr<double, memory_kind::cuda_device> array0 =
3      broadcast(gpu_array, 0).wait();
4  // copy from gpu array on process 0 to host array on this process
5  copy(array0, host_array, 1024).wait();
```

## 16.2 API Reference

### 16.2.1 cuda\_device

```
1 struct cuda_device;
```

2 *C++ Concepts: DefaultConstructible, MoveConstructible, Destructible*

```
3 struct cuda_device {
    using id_type = int;
    // ...
};
```

4 Member alias for the type of a CUDA device ID.

```
5 struct cuda_device {
    template<typename T>
    using pointer = T*;
    // ...
};
```

6 Member template alias for raw pointer types on a CUDA device.

```
7 template<typename T>
[static] constexpr cuda_device::pointer<T>
    cuda_device::null_pointer();
```

8 Returns a representation of a null CUDA pointer.

```
9 template<typename T>
[static] constexpr std::size_t cuda_device::default_alignment();
```

10 Returns the default alignment of an object of type T on a CUDA device.

```
11 [static] const memory_kind cuda_device::kind =
    memory_kind::cuda_device;
```

12 Constant that has the same value as `memory_kind::cuda_device`.

```
13 [static] constexpr cuda_device::id_type
    cuda_device::invalid_device_id = /* implementation-defined */;
```

A constant representing an invalid device ID.

```
14 cuda_device::cuda_device();
```

15 Constructs an inactive `cuda_device` object.

```
16 cuda_device::cuda_device(cuda_device::id_type device_id);
```

17 *This function is collective (§12.1) over the world team, and it must be called by the thread that has the master persona (§10.5.1).*

18 *Precondition:* `device_id` must be `cuda_device::invalid_device_id` or a valid CUDA device ID that is not associated with an active `cuda_device` object on the calling process

19 If the device ID is valid, constructs a `cuda_device` with the given device ID, which acts as the calling process's representative of the resulting collective device. If the device ID is `cuda_device::invalid_device_id`, constructs an inactive `cuda_device` object.

20 *UPC++ progress level: internal*

```
21 cuda_device::cuda_device(cuda_device &&other);
```

22 Transfers the state represented by `other` to this `cuda_device`. Deactivates `other`.

23 *UPC++ progress level: none*

```
24 void cuda_device::destroy(entry_barrier lev =  
                           entry_barrier::user);
```

25 *This function is collective (§12.1) over the world team, and it must be called by the thread that has the master persona (§10.5.1).*

26 *Precondition:* If this process's representative of the collective device being destroyed is inactive, then this `cuda_device` must be inactive. Otherwise, this instance must be the process's representative of the collective device. `lev` must be single-valued (Ch. 12). After the entry barrier specified by `lev` completes, or upon entry if `lev == entry_barrier::none`, all asynchronous UPC++ operations on memory associated with this device must have signaled operation completion.

27 Destroys the calling process's state associated with this `cuda_device`, deactivating this device object. Subsequent operations on a `device_allocator` associated with this device, other than destruction, produce undefined behavior.

---

28 *C++ memory ordering:* If `lev != entry_barrier::none`, with respect to all threads participating in this collective, all evaluations which are *sequenced-before* their respective thread's invocation of this call will have a *happens-before* relationship with all evaluations sequenced after the call.

29 *UPC++ progress level:* `user` if `lev == entry_barrier::user`,  
          `internal` otherwise

30 `cuda_device::~cuda_device();`

31 *Precondition:* Either `UPC++` must have been uninitialized since the `cuda_device` creation, or the `cuda_device` must either have had `destroy()` called on it, been deactivated by being passed to the move constructor, or be an inactive `cuda_device`.

32 Destroys this `cuda_device` object.

33 *This function may be called when UPC++ is in the uninitialized state.*

34 *UPC++ progress level:* `none`

35 `cuda_device::id_type cuda_device::device_id() const;`

36 Returns the device ID of this `cuda_device`. If this is an inactive device, returns `cuda_device::invalid_device_id`.

37 *UPC++ progress level:* `none`

38 `bool cuda_device::is_active() const;`

39 Returns whether or not this `cuda_device` is active. A `cuda_device` is active if it was created with a valid device ID, has not been passed to the move constructor, and has not had its state destroyed by a call to `destroy`.

40 *UPC++ progress level:* `none`

## 16.2.2 device\_allocator

```
1 template<typename Device>
  class device_allocator;
```

2     *C++ Concepts:* DefaultConstructible, MoveConstructible, Destructible

```
3 template<typename Device>
  class device_allocator {
    using device_type = Device;
    // ...
  };
```

4     Member type that is an alias for the template parameter `Device`.

```
5 template<typename Device>
  device_allocator<Device>::device_allocator();
```

6     Constructs an invalid `device_allocator` object.

```
7 template<typename Device>
  device_allocator<Device>::device_allocator(Device &device,
                                             size_t sz_in_bytes);
```

8     *Precondition:* `device.is_active()`. `device` must not have been previously used to create a `device_allocator`.

9     Constructs a `device_allocator` associated with the given device. Allocates and manages a segment of size `sz_in_bytes` on the device. If the allocation fails, throws `std::bad_alloc`.

10    The segment is allocated from the associated device in a device-specific manner. Any device-specific properties of the resulting allocation are implementation-defined. If special properties are required, users may allocate their own segment instead and use the second constructor to initialize an allocator from that segment.

11    *Exceptions:* May throw `std::bad_alloc`.

12    *UPC++ progress level:* none



```
13 template<typename Device>  
device_allocator<Device>::device_allocator(Device &device,  
      typename Device::pointer<void> device_memory,  
      size_t sz_in_bytes);
```

14 *Precondition:* `device.is_active()`. `device` must not have been previously used to create a `device_allocator`. `device_memory` must be a pointer to memory associated with the given device, and it must not be managed by another allocator. The memory referenced by `device_memory` must be at least `sz_in_bytes` bytes in size.

15 Constructs a `device_allocator` associated with the given device using the given `device_memory` for its memory management.

16 *UPC++ progress level:* none

```
17 template<typename Device>  
device_allocator<Device>::device_allocator(  
      device_allocator &&other);
```

18 Transfers the state represented by `other` to this `device_allocator`. Invalidates `other`, and any subsequent operations on `other`, except for destruction, produce undefined behavior.

19 *UPC++ progress level:* none

```
20 template<typename Device>  
device_allocator<Device>::~device_allocator();
```

21 Destroys this `device_allocator` object. If this `device_allocator` allocated a segment on construction, frees the associated segment, invalidating all global pointers that reference memory within that segment.

22 *This function may be called when UPC++ is in the uninitialized state.*

23 *UPC++ progress level:* none

```
24 template<typename Device>
template<typename T>
global_ptr<T, Device::kind>
    device_allocator<Device>::allocate(size_t n = 1,
        std::size_t alignment = Device::default_alignment<T>());
```

25 *Precondition:* `alignment` is a valid alignment.

26 Allocates enough space for `n` objects of type `T` from the segment managed by this allocator, with the memory aligned as specified by `alignment`. If the allocation succeeds, returns a global pointer to the start of the allocated memory, and the allocated memory is uninitialized. If the allocation fails, returns a null pointer.

27 *UPC++ progress level:* none

```
28 template<typename Device>
template<typename T>
void device_allocator<Device>::deallocate(
    global_ptr<T, Device::kind> g);
```

29 *Precondition:* `g.is_null() || g.where == rank_me()`. `g` must be either a null pointer or a non-deallocated pointer that resulted from a call to `allocate<T, alignment>` on this allocator, for some value of `alignment`.

30 Deallocates the storage previously allocated by a call to `allocate`. Does nothing if `g` is a null pointer. Does not invoke the destructor for `T`.

31 *UPC++ progress level:* none

```
32 template<typename Device>
template<typename T>
global_ptr<T, Device::kind>
    device_allocator<Device>::to_global_ptr(
        typename Device::pointer<T> ptr) const;
```

33 *Precondition:* `ptr` is a null pointer, or a valid pointer such that the expression `*ptr` on this allocator's device yields a (possibly uninitialized) object of type `T` that resides within the segment managed by this allocator

34 Converts a raw device pointer to a global pointer.

35 *UPC++ progress level:* none

```

36 template<typename Device>
   template<typename T>
   [static] typename Device::pointer<T>
       device_allocator<Device>::local(
           global_ptr<T, Device::kind> g);
37
   Precondition: g.is_null() || g.where() == rank_me(). g must be ei-
   ther a null pointer or a non-deallocated pointer that resulted from a call to
   allocate<T, alignment> on a device_allocator<Device> on the caller's
   process, for some value of alignment.
38
   Returns the raw device pointer associated with g. If g is a null pointer, returns
   Device::null_pointer<T>().
39
   UPC++ progress level: none
40
   template<typename Device>
   template<typename T>
   [static] typename Device::id_type
       device_allocator<Device>::device_id(
           global_ptr<T, Device::kind> ptr);
41
   If the pointer is not null, returns the ID of the device where the referenced
   object resides. If the pointer is null, returns Device::invalid_device_id.
42
   UPC++ progress level: none

```

### 16.2.3 Data Movement

```

1 template<typename T, memory_kind Kind1, memory_kind Kind2,
   typename Completions=decltype(operation_cx::as_future())>
   RType upcxx::copy(global_ptr<T, Kind1> src,
       global_ptr<T, Kind2> dest,
       size_t count, Completions cxs=Completions{});
   template<typename T, memory_kind Kind,
       typename Completions=decltype(operation_cx::as_future())>
   RType upcxx::copy(T const *src, global_ptr<T, Kind> dest,
       size_t count, Completions cxs=Completions{});
   template<typename T, memory_kind Kind,
       typename Completions=decltype(operation_cx::as_future())>
   RType upcxx::copy(global_ptr<T, Kind> src, T *dest,
       size_t count, Completions cxs=Completions{});

```

2     *Precondition:* T must be DefinitelyTriviallySerializable. The source and destination memory regions must not overlap. `src` and `dest` must not be null pointers, even if `count` is zero. `src` in the second variant and `dest` in the third variant must reference host memory.

3     Initiates an operation to transfer and store the `count` items of type T beginning at `src` to the memory beginning at `dest`. The values referenced in the `[src,src+count)` interval must not be modified until either source or operation completion is indicated.

4     Source- and operation-completion operations execute on the current (initiating) persona of the calling process. In the first and second variant, remote-completion operations execute on the master persona of the host process associated with the destination (i.e. `dest.where()`). In the third variant, remote-completion operations execute on the master persona of the calling process.

*Completions:*

5         • *Source:* Indicates completion of injection or internal buffering of the source values, signifying that the `src` buffer may be modified.

6         • *Remote:* Indicates completion of the transfer of the values, implying readiness of the target buffer `[dest,dest+count)`.

7         • *Operation:* Indicates completion of all aspects of the operation: the transfer and stores are complete.

8     *C++ memory ordering:* For LPC and RPC completions, all evaluations *sequenced-before* this call will have a *happens-before* relationship with the execution of the completion function.

9     *UPC++ progress level:* **internal**

# Appendix A

## Notes for Implementers

The following are possible implementations of template metaprogramming utilities for UPC++ features.

### A.1 `future_element_t`

```
1 template<int I, typename T>
  struct future_element; // undefined

template<int I, typename T, typename ...U>
struct future_element<I, future<T, U...>> {
    typedef typename future_element<I-1, future<U...>>::type type;
};

template<typename T, typename ...U>
struct future_element<0, future<T, U...>> {
    typedef T type;
};

template<typename T, typename ...U>
struct future_element<-1, future<T, U...>> {
    typedef std::tuple<T, U...> type;
};

template<typename T>
struct future_element<-1, future<T>> {
```

```
    typedef T type;
};

template<int I>
struct future_element<I, future<>> {
    typedef void type;
};

template<int I, typename T>
using future_element_t = typename future_element<I, T>::type;
```

## A.2 future<T...>::when\_all

Utility types:

```
1 template<template<typename ...Us> class T, typename A, typename B>
  struct concat_type; // undefined

template<template<typename ...Us> class T,
         typename ...As, typename... Bs>
struct concat_type<T, T<As...>, T<Bs...> > {
    typedef T<As..., Bs...> type;
};

template<template<typename ...Us> class T,
         typename A, typename... Bs>
struct concat_element_types {
    typedef typename concat_element_types<T, Bs...>::type rest;
    typedef typename concat_type<T, A, rest>::type type;
};

template<template<typename ...Us> class T, typename A>
struct concat_element_types<T, A> {
    typedef A type;
};

template<template<typename ...Us> class T, typename ...U>
using concat_element_types_t =
    typename concat_element_types<T, U...>::type;
```

Declaration of `future<T...>::when_all`:

```
2 template<typename ...Futures>
  concat_element_types_t<future, Futures...> when_all(Futures ...fs);
```

### A.3 to\_future

Utility types:

```
1 template<typename T>
  struct future_type {
    typedef future<T> type;
  };

  template<typename ...T>
  struct future_type<future<T...>> {
    typedef future<T...> type;
  };

  template<>
  struct future_type<void> {
    typedef future<> type;
  };

  template<typename T>
  using future_type_t = typename future_type<T>::type;
```

Declaration of `to_future`:

```
2 template<typename T>
  future_type_t<T> to_future(T future_or_value);
```

## A.4 `future_invoke_result_t`

C++11-compliant implementation:

```
1 template<typename Func, typename... ArgTypes>  
using future_invoke_result_t =  
future_type_t<typename std::result_of<Func(ArgTypes...)>::type>;
```

C++17-compliant implementation:

```
2 template<typename Func, typename... ArgTypes>  
using future_invoke_result_t =  
future_type_t<std::invoke_result_t<Func, ArgTypes...>>;
```



# Bibliography

- [1] IEEE Standard for Floating-Point Arithmetic. *IEEE Std 754-2008*, pages 1–70, Aug 2008. doi:10.1109/IEEESTD.2008.4610935.
- [2] *ISO/IEC 14882:2011(E) Information technology - Programming Languages - C++*. Geneva, Switzerland, 2012. URL: <https://www.iso.org/standard/50372.html>.
- [3] *ISO/IEC 14882:2014(E) Information technology - Programming Languages - C++*. Geneva, Switzerland, 2014. URL: <https://www.iso.org/standard/64029.html>.
- [4] John Bachan, Scott B. Baden, Steven Hofmeyr, Mathias Jacquelin, Amir Kamil, Dan Bonachea, Paul H. Hargrove, and Hadia Ahmed. UPC++: A High-Performance Communication Framework for Asynchronous Computation. In *Proceedings of the 33rd IEEE International Parallel & Distributed Processing Symposium*, IPDPS. IEEE, 2019. doi:10.25344/S4V88H.
- [5] Y. Zheng, A. Kamil, M. B. Driscoll, H. Shan, and K. Yelick. UPC++: A PGAS extension for C++. In *IEEE 28th International Parallel and Distributed Processing Symposium (IPDPS)*, pages 1105–1114, May 2014. doi:10.1109/IPDPS.2014.115.

# Index

Affinity, 5  
allocate, 26, 27  
atomic\_domain, 100  
  add, 105  
  bit\_and, 105  
  bit\_or, 105  
  bit\_xor, 105  
  compare\_exchange, 104  
  constructor, 101  
  dec, 105  
  destroy, 101  
  destructor, 102  
  fetch\_add, 105  
  fetch\_bit\_and, 105  
  fetch\_bit\_or, 105  
  fetch\_bit\_xor, 105  
  fetch\_dec, 105  
  fetch\_inc, 105  
  fetch\_max, 105  
  fetch\_min, 105  
  fetch\_mul, 105  
  fetch\_sub, 105  
  inc, 105  
  load, 102  
  max, 105  
  min, 105  
  move constructor, 101  
  mul, 105  
  store, 103  
  sub, 105  
  atomic\_op, 100  
  barrier, 92  
  barrier\_async, 93  
  broadcast, 96  
C++ Concepts, 5  
Collective, 5  
Collective Object, 6  
Conventions, 5  
copy, 133  
CType, 60  
  operator|, 62  
cuda\_device, 127  
  constructor, 128  
  default constructor, 128  
  default\_alignment, 127  
  destroy, 128  
  destructor, 129  
  device\_id, 129  
  id\_type, 127  
  invalid\_device\_id, 127  
  is\_active, 129  
  kind, 127  
  move constructor, 128  
  null\_pointer, 127  
  pointer, 127  
current\_persona, 81  
deallocate, 27  
default\_persona, 81

- default\_persona\_scope, 83
- DefinitelySerializable, 6, 46
- DefinitelyTriviallySerializable, 6, 46
- delete\_, 26
- delete\_array, 26
- deserializing\_iterator, 49, 51
- Device, 6
- Device Segment, 6
- device\_allocator, 130
  - allocate, 132
  - allocating constructor, 130
  - deallocate, 132
  - default constructor, 130
  - destructor, 131
  - device\_id, 133
  - device\_type, 130
  - local, 133
  - move constructor, 131
  - non-allocating constructor, 131
  - to\_global\_ptr, 132
- discharge, 75, 83
- dist\_id, 112
  - default constructor, 112
  - here, 112
  - when\_here, 112
- dist\_object, 109
  - constructor, 109
  - destructor, 110
  - fetch, 111
  - id, 110
  - move constructor, 110
  - operator\*, 111
  - operator->, 111
  - team, 111
  - variadic constructor, 109
- entry\_barrier, 92
- Execution Model, 3
- finalize, 11
- future, 38
  - default constructor, 38
  - destructor, 38
  - ready, 39
  - result, 39
  - result\_tuple, 39
  - then, 40
  - wait, 40
  - wait\_tuple, 40
- future\_element\_t, 136
- future\_invoke\_result\_t, 138
- Futures and Promises, 6
- getenv\_console, 12
- Global Pointer, 1, 6
- global\_ptr, 15
  - comparison operators, 21
  - comparison operators (STL specializations), 21
  - conversion to kind any, 15
  - destructor, 16
  - dynamic\_kind, 16
  - dynamic\_kind\_cast, 23
  - element\_type, 15
  - is\_local, 17
  - is\_null, 17
  - kind, 15
  - local, 17
  - null constructor, 15
  - operator bool, 17
  - operator+, 18
  - operator++, 20
  - operator+=", 18
  - operator-, 19
  - operator-, 20
  - operator--, 19
  - operator«, 22
  - reinterpret\_pointer\_cast, 22
  - static\_kind\_cast, 23
  - static\_pointer\_cast, 22

- where, 18
- Glossary, 5
- init, 10
- initialized, 11
- inrank\_t, 14
- is\_definitely\_serializable, 50
- is\_definitely\_trivially\_serializable, 50
- liberate\_master\_persona, 81
- Local, 6
- local\_team, 89
- local\_team\_contains, 90
- make\_future, 39
- make\_view, 48, 53, 54
- master\_persona, 80
- memory\_kind, 14
- new\_, 24, 25
- new\_array, 25
- op\_fast\_add, 93
- op\_fast\_bit\_and, 93
- op\_fast\_bit\_or, 93
- op\_fast\_bit\_xor, 93
- op\_fast\_max, 93
- op\_fast\_min, 93
- op\_fast\_mul, 93
- Operation Completion, 6
- operation\_cx, 60
  - as\_future, 61
  - as\_lpc, 61
  - as\_promise, 61
- Persona, 7
- persona, 79
  - active\_with\_caller, 80
  - default constructor, 79
  - destructor, 79
  - lpc, 80
  - lpc\_ff, 79
- persona\_scope, 81
  - constructor, 81, 82
  - constructor (with mutex), 82
  - destructor, 82
- Private Object, 7
- Process, 7
- Progress, 7
- progress, 74, 78
- progress\_level, 73, 78
  - progress\_level::internal, 73
  - progress\_level::none, 74
  - progress\_level::user, 73
- progress\_required, 75, 83
- promise, 41
  - constructor, 41
  - destructor, 42
  - finalize, 43
  - fulfill\_anonymous, 42
  - fulfill\_result, 42
  - get\_future, 43
  - require\_anonymous, 42
- Rank, 7
- rank\_me, 89
- rank\_n, 89
- reduce\_all, 94
- reduce\_one, 94
- Referentially Transparent, 7
- Remote, 7
- Remote Procedure Call, 7
- remote\_cx, 60
  - as\_rpc, 62
- rget, 65
  - bulk rget, 66
- rget\_irregular, 116
- rget\_regular, 120
- rget\_strided, 123
- rpc, 70
- rpc\_ff, 69

- 
- rput, 63
    - bulk rput, 64
  - rput\_irregular, 114
  - rput\_regular, 118
  - rput\_strided, 121
  - RType, 60
  
  - Serializable, 8, 46
  - Serialization
    - Concepts, 46
    - Function objects, 47
    - Special cases, 48
    - User-defined, 44
    - View-based, 48
  - serialize, 44
  - Shared Segment, 7
  - Source Completion, 7
  - source\_cx, 60
    - as\_blocking, 62
    - as\_buffered, 62
    - as\_future, 61
    - as\_lpc, 61
    - as\_promise, 61
  
  - Team, 8
  - team, 85
    - color\_none, 85
    - destroy, 87
    - destructor, 88
    - from\_world, 86
    - move constructor, 87
    - operator [], 86
    - rank\_me, 85
    - rank\_n, 85
    - split, 86
    - team\_id, 88
  - team\_id, 88
    - default constructor, 88
    - here, 88
    - when\_here, 89
  
  - Thread, 8
  - to\_future, 41
  - to\_global\_ptr, 16
  - top\_persona\_scope, 82
  - TriviallySerializable, 8, 46
  - try\_global\_ptr, 16
  
  - UPCXX\_SPEC\_VERSION, 11
  - UPCXX\_VERSION, 11
  
  - view, 48
    - default constructor, 53
    - T\* iterator specialization, 53
    - with general iterator, 51
  - view\_default\_iterator\_t, 49, 51
  
  - when\_all, 41
  - world, 89